


客户签名:

日期:


Front View

Side View

Back View

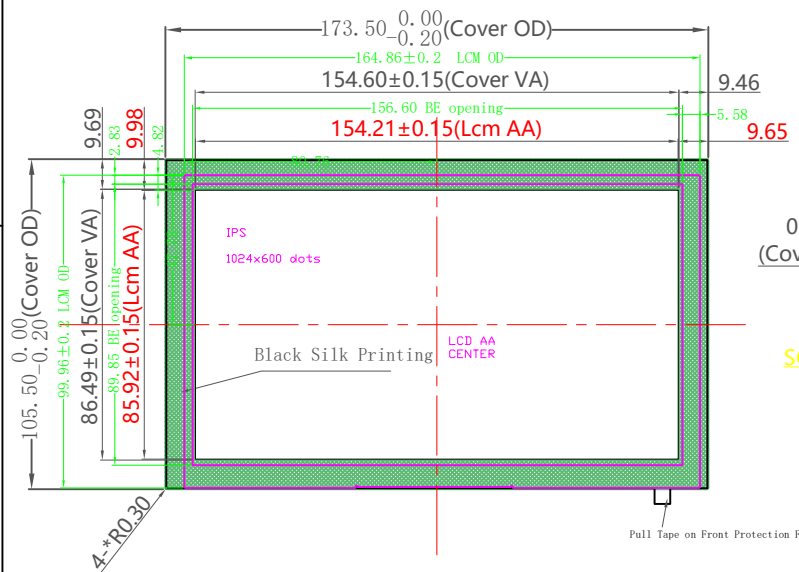

Assembly Total Thickness T=5.28 $\pm$ 0.2mm

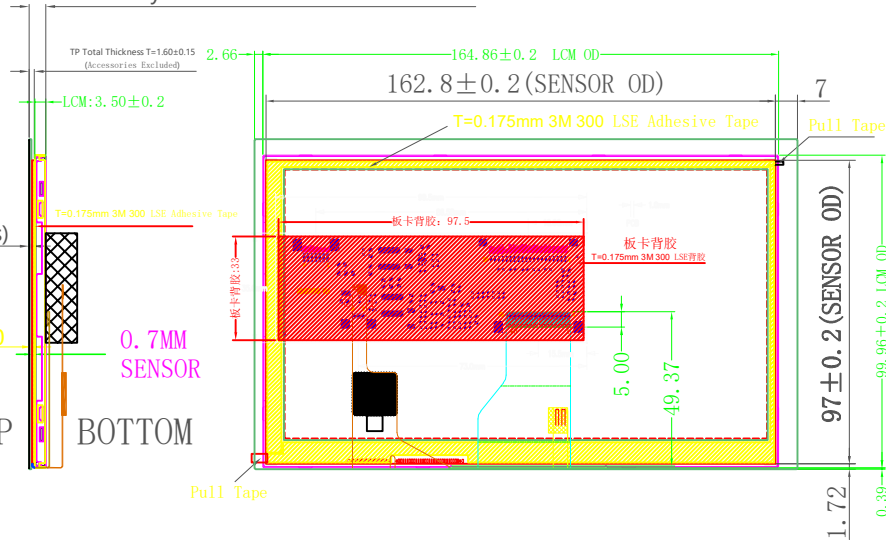


(Assembly Drawing of LCM+TP Adhesive Bonding)

* Unspecified Tolerances is: ± 0.2

Note:	
LCD TYPE	7 inch TFT Transmissive
DISPLAY MODE	Normally black
VIEW DIRECTION	All viewing angle
OPERATING TEMP.	-10° C ~ 50° C
STORAGE TEMP.	-20° C ~ 60° C
BACK LIGHT	27 White leds
BL voltage/current	9.6V / 180mA
ALL MATERIALS MUST BE ROHS COMPLIANT	

Technical Parameters:

1. GLASS+SCA+GlassITO+FPC
2. GG/COF Structure: FT5426
3. Glass Material: Asahi Glass
4. Glass Transparency: $\geq 85\%$
5. Glass Surface Hardness: $\geq 6H$
6. TP Working Environment: -10°C ~ 60°C, $\leq 90\%RH$
7. TP Storage Environment: -20°C ~ 70°C, $\leq 90\%RH$
8. ROHS Compliant
9. Unmarked Tolerance $\pm 0.2mm$



FPC Pin Logics

PIN	Connection
1	GND
2	SCL
3	SDA
4	INT
5	RST
6	NC
7	VDD
8	NC
9	GND
10	NC
11	GND
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC

物料	NO.	更改内容	日期	工程确认图			MAXEN ELECTRONICS LIMITED			
	1			方向			公司编号	HCT1506GG070A1J2-V0 Assembly Drawing	未注公差	± 0.2
	2									
	3			绘图	审核	日期	客户编号		单位	mm
	4									
	5					20211123	版本号		比例	1 : 1
	6									