
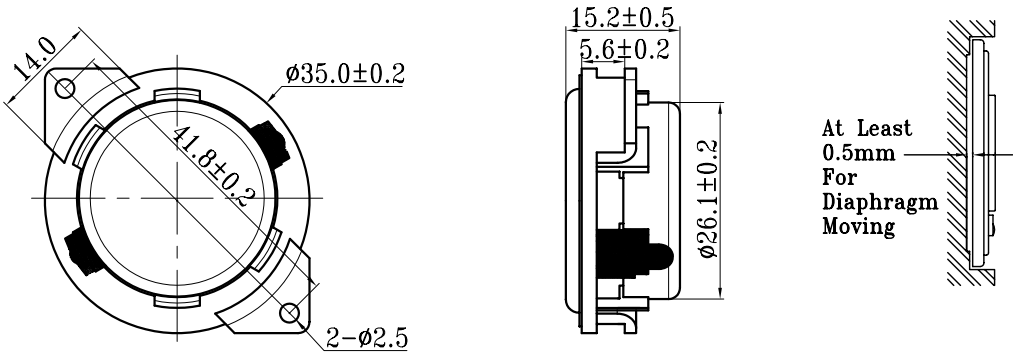


XIAMEN HONCH INDUSTRIAL SUPPLIERS CO LTD

TEL:+86-592-5020537 FAX: +86-592-5020137 <http://www.globalsources.com/honch.co>

1	MODEL	35CP08A-1				
2	Dimension	Outer Diameter	35.0 mm	Baffle Opening	mm.	
		Height Refer to drawing	Weight	30.0	Gram.	
3	Magnet	Materials	Rare Earth	Size	ø19.5X4.0 mm.	
4	Nominal Impedance	8	Ohm	± 15 %	At	1000 Hz
5	Power Rating	Normal	5.0	W.	Maximum	7.0 W.
6	Lowest Resonant Frequency	380	±	76	Hz	
7	Output Sound Pressure Level (S.P.L.)	81	± 3	dB / 1 Watt 1 Meter.		
		Average at	500,600,800,1000			Hz
8	Frequency Range	250~20K		Hz.	Average	SPL-10 dB.
9	Distortion	5 %	Maximum At	1000	Hz	5.0 W.
10	Abnormal Sound Test	Must be Normally Tested By			6.32	Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter			6.32 Volts. (RMS)	96 Hrs.
12	Operation Temperature	-25°C ~ +70°C				
13	Storage Temperature	-40°C ~ +85°C				
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC				
		Current to the "+" or "Marked" Terminal.				
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.				

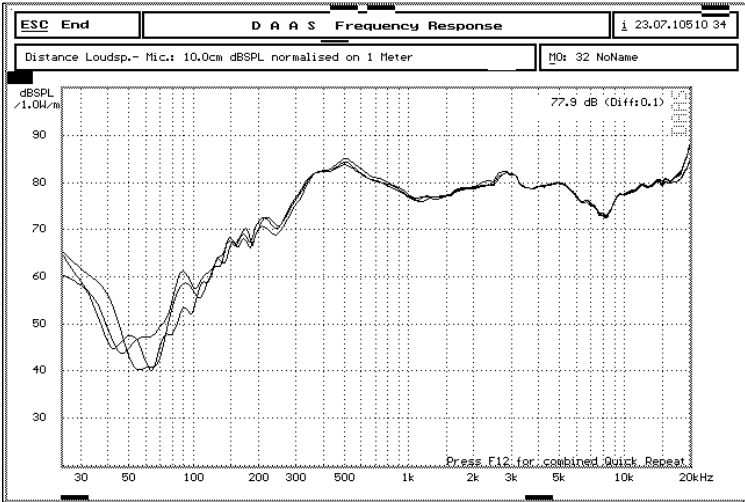

Unit:mm

0507C

Admitted:

Approved:

Made: