


Terminal Blocks, PA & Brass Type

- Polyamide (PA), UL 94V-2 flame-retardant housing rated at T110 (IEC), 105°C (UL).
- Metal parts feature steel screws and nickel-plated brass contacts.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Accepts a wider range of conductor sizes than old brass type.
- Modular 12-circuit design can be cut into desired number of poles (can be pre-cut upon request).
- Certified to IEC/EN 60998 and Recognized to UL 1059.

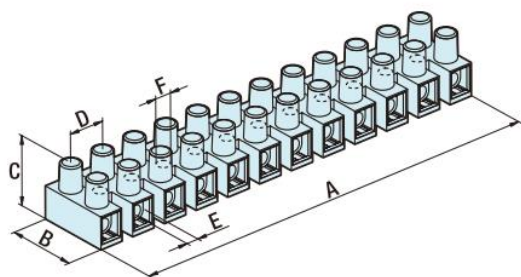

Cat. No.	Dimensions (mm/inches)							Screw
	Unit	A	B	C	D	ØE	ØF	
PA8S	mm	96.20	17.00	14.30	8.20	2.80	2.90	M2.6x5
	in.	3.787	0.669	0.563	0.323	0.110	0.114	
PA10S	mm	117.2	20.00	16.40	10.00	3.40	3.60	M3x6
	in.	4.614	0.787	0.646	0.394	0.134	0.142	
PA12S	mm	140.7	23.80	19.00	12.00	4.20	3.90	M3.5x7
	in.	5.539	0.937	0.748	0.472	0.165	0.154	

Cat. No.	Color	No. of Poles	Electrical Ratings & Wire Range (Cu)	Approvals	Packing
PA8S	Nature	12	32A, 450V, T110°C 0,75-4 mm², Rigid/Flex	CE  (FI) 	Carton of 500 (10 bags, 50 ea.)
			20A, 300V, 105°C (221°F) 22-12 AWG, Sol/Str	 US	
PA10S	Nature	12	41A, 450V, T110°C 1-6 mm², Rigid/Flexible	CE  (FI) 	Carton of 500 (10 bags, 50 ea.)
			30A, 300V, 105°C (221°F) 22-10 AWG, Sol/Str	 US	
PA12S	Nature	12	57A, 500V, T110°C 2,5-10 mm², Rigid/Flex	CE  (FI) 	Carton of 400 (10 bags, 40 ea.)
			35A, 300V, 105°C (221°F) 22-10 AWG, Sol/Str	 US	