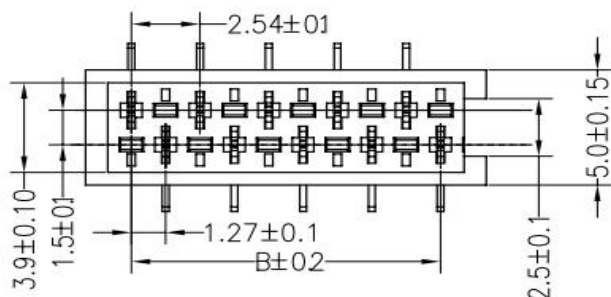
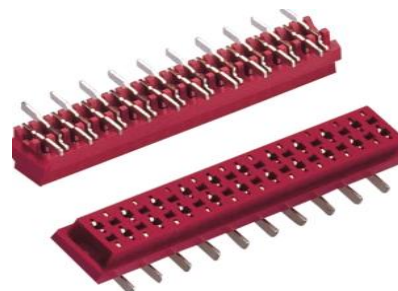

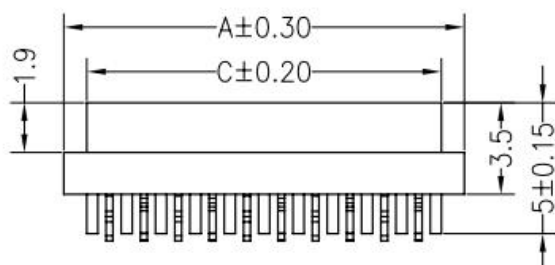
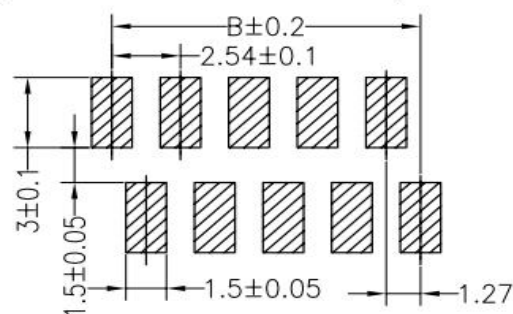


SPECIFICATIONS:

Rated Current	1.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Sn Over Ni
Insulator Material	PA46 -UL94V-0
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

PINS	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

Ordering Information

HC Series	No.of Pin Per Row	Inner code	Type	Plating Code	Insulator Option	Inner Code	Packing Code	End code
HC-MH	04P	F=Female	M=SMT Type	SM=Matted Tin	A=PBT	N	T=Tube	01
1.27mm Micro Match	26P			SN=Tin	D=PA46		P=Cap+Mylar	
							R= Reel+Mylar	