



Materials


Pin:Brass,machined, (H59-3)
Plating:Gold plated:1.25u"m/50u"nickel,full gold
Insulator body(black):PPS(UL94V-0)

Electrical

Current rating:2Amps/contact max.
Contact resistance:20mΩ
Insulation resistance:1000MΩ
Operating voltage:60 AC/DC



Mechanical

Operating temperature :Gold plated:-55°C to +105°C
(Continuous) -67°H to +105°H
Tin plated:-40°C to +105°C
Soldering temperature:260°C,10s max

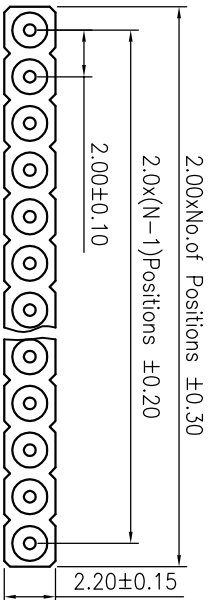


注: 整条总长+0.8

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

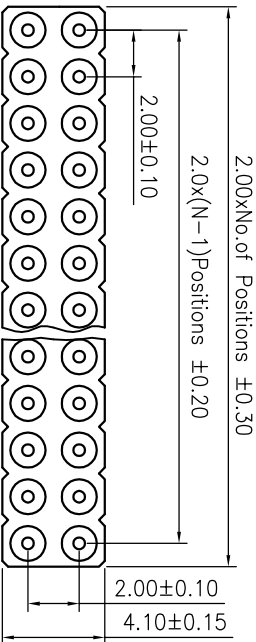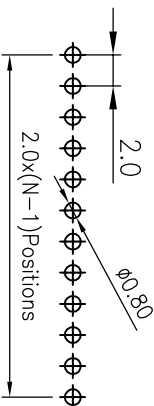



注: 整条总长+0.5

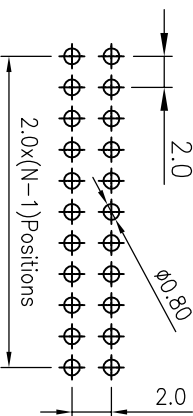

Ordering Information

3612 28 X XX S XX 080 01

No.of Rows
1=Single Row
2=Dual Row
No.of Pins
1x40Pin
2x40Pin
Contact Plating
SN:Tin
G0:Gold Flash
G2:2U"Gold
G3:3U"Gold
G4:5U"Gold
G5:10U"Gold
S0:Gold Flash/Tin
Standard:G0

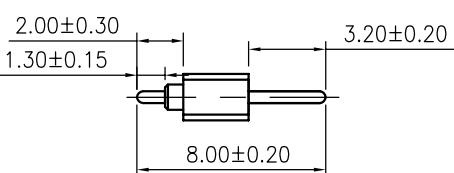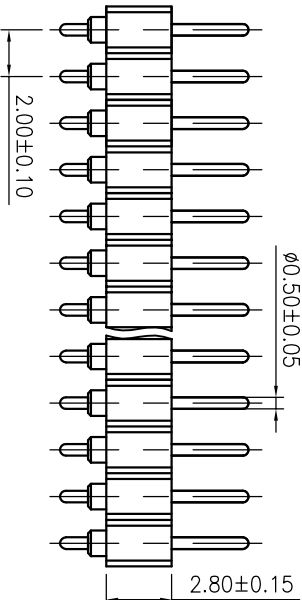

JIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 361228XXSX08001

TITLE: 2.0X2.8双头针180°L=8.0(针尖0.5)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	OPERATION		DRAW	yiyusheng	18.12.13	SCALE		FIT	PART NO.	TITLE:
							X.X	±0.30				UNIT	mm			
A0	2018.12.13	NEW DRAWING		X.XXX	±0.10	CHECK						SIZE	A4			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE						SHEET	1.5/1			
1	2	3	4	5	6	7	8	9								