




威固电子户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

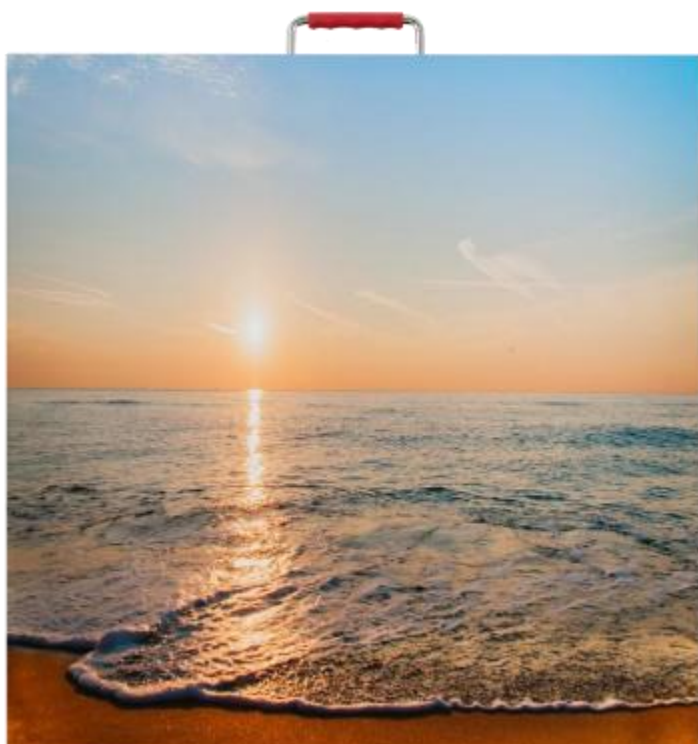

户内常规 576mm*576mm 屏体

INDOOR CONVENTIONAL 576MM*576MM SCREEN PRODUCT SPECIFICATION

产品规格书

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION


技术参数

TECHNICAL PARAMETERS

模组 Unit Module	项目	Item	参数	Parameter
	产品型号	Model Number	VG-P3-32s	
	模组尺寸	Module Size	192mm*192mm	
	物理点间距	Physical Pitch	3mm	
	物理密度	Physical Density	111111dots/m2	
	发光点颜色	Pixel Configuration	1R1G1B	
	LED 封装	Package Mode	SMD 3IN1 -2020	
	模组分辨率	Module Resolution	64dots(W)*64dots(H)	
	模组最大功耗	Max Power	15W	
	模组厚度	Module Thickness	15mm	
	模组重量	Module Weight	240g	
	驱动方式	Drive Type	恒流驱动 Constant drive	
	扫描方式	Scan Mode	1/32 扫描 1/32scan	
	接口方式	Port Type	HUB75E	
	匹配箱体尺寸	Match Cabinet Size	W576mm*H576mm	

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

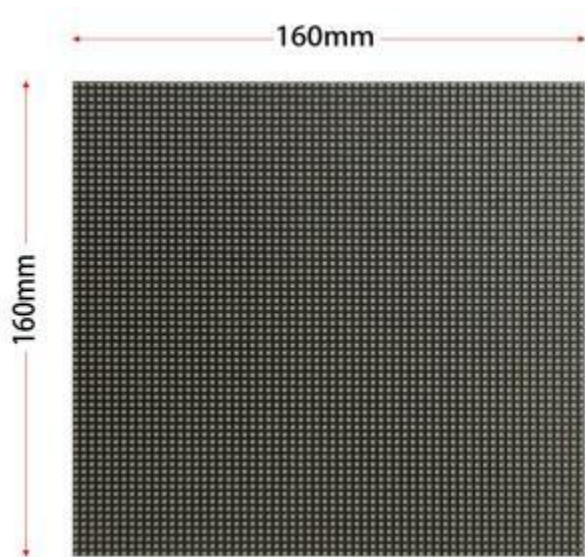


户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

显示屏参数 Display Parameters	箱体尺寸	Dimension	576mm*576mm
	屏体厚度	Thickness	85mm
	箱体重量	Weight	10.5kg
	单体模组数	Monomer Module Number	9pcs
	维护连接方式	Maintenance Connection Mode	后维护 Maintenance from the Back
	箱体分辨率	Pixel per Cabinet	36864 pixels
	最佳视角	Best Viewing Angle	H:120° ;V:120°
	视距	Recommended Viewing	3m-20m
	驱动 IC	Driver IC	北方集创 ICND2153/2163
	画面刷新率	Refresh Rate	1920Hz
	白平衡亮度	Brightness of White Balance	1200cd/m²
	工作温度/湿度	Operating Temperature/Humidity	-40°C ~ +60°C
	寿命	Life Time	>100000 hours
	坏灯率	Bad Light Rate	<0.0001
	平均无故障时间	MTBF	>5000 hours
	箱体匹配模组尺寸	Cabinet Matching Module Size	192mm*192mm
	箱体匹配模组型号	Cabinet Matching Module Model	P3/P6
供电 Power	输入电压	Input Voltage	110-220V;AC±10%
	供电方式	Power Supply	5V/60A*2pcs
	工作电压	Working Voltage	AC220V±10%
	平均功耗	Average Power Consumption	260w/m²
	最大功耗	Max. Power Consumption	800w/m²
控制系统 Control System	控制主机	CPU	P4 或以上 Pentium4 or Above
	操作系统	Operation System	WIN98/2000/NT/XP/WIN7
	控制方式	Control Method	同步控制 Synchronization


户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

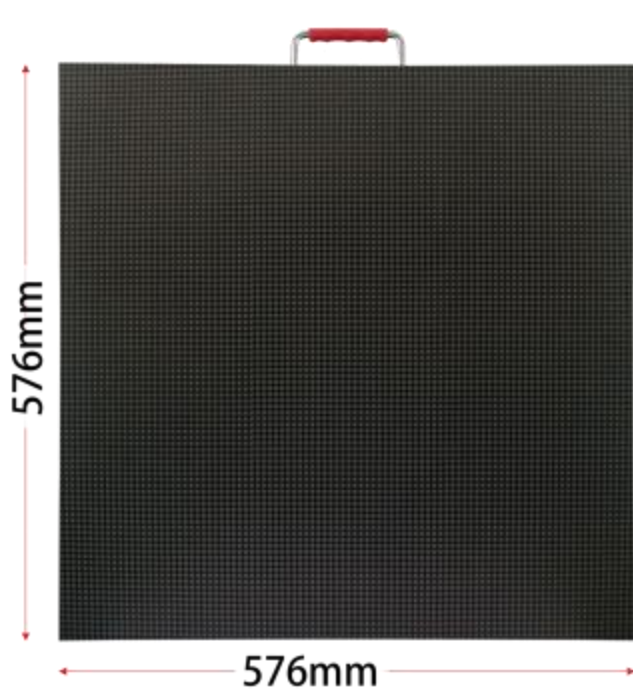

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

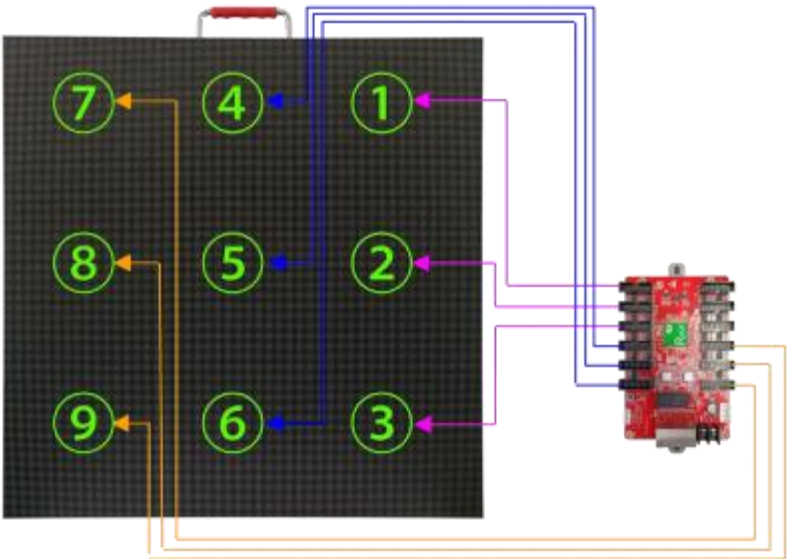

接收卡 1pcs
Receiving Card



5V-60A 200-240V 300W开关电源 2pcs
5V-60A 200-240V 300W Switching Mode Power Supply



5V模组排线 20cm 2 pcs
5V Module signal line



5V模组排线 30cm 1 pcs
5V Module signal line



5V模组排线 35cm 2 pcs
5V Module signal line



5V模组排线 40cm 3 pcs
5V Module signal line



5V模组排线 45cm 1 pcs
5V Module signal line



5V模组排线 45cm 1 pcs
5V Module signal line

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION



5V模组电源线（一拖二） 45cm 2pcs
5V module power cord (one for two)



5V模组电源线（一拖二） 60cm 3 pcs
5V module power cord (one for two)



220V电缆线 30cm 1pcs
220VCable



220V电源航插头 25cm 2pcs
220V Power aviation plug



220V箱体之间电缆线 50cm 1pcs
Cable between 220V cabinets



箱体内部网线 25cm 1pcs
Cabinet internal network cable

35cm 1pcs

箱体之间网线 12m 1pcs
Network cable between cabinets

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

案例分享

CASE SHARING

