

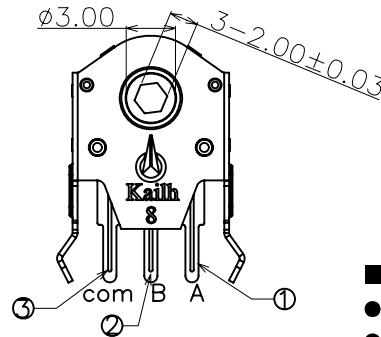
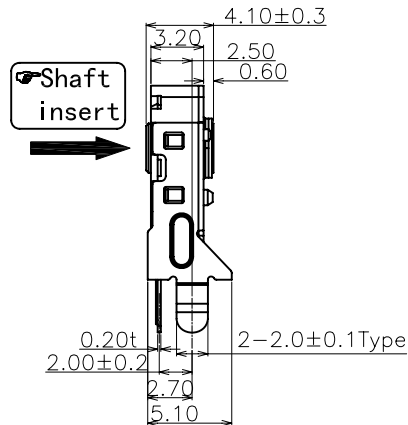
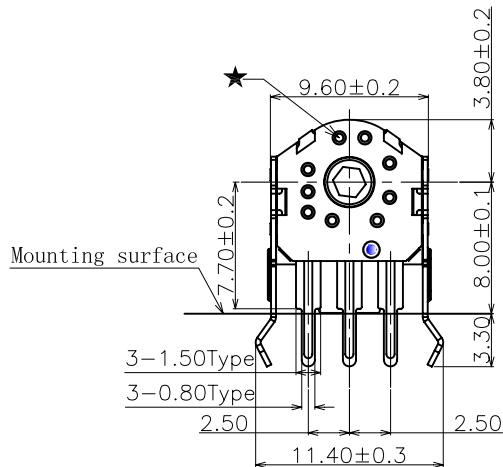


ABIDE BY ROHS





A:Output signal A
B:Output signal B

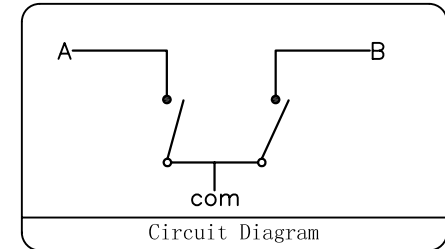

Specification :

- 1. Rated voltage: D.C. 5V
- 2. Maximum operating current (resistive load)
Each lead :1mA
- 3. Resolution: 12 pulses/360° for each phase
- 4. Contact Resistance: 5Ω (Max)
- 5. Insulation resistance: 50MΩ (Min) DC50V
- 6. Dielectric strength: AC50V (50-60Hz) for 1 minute
- 7. Detent torque: 15-30gf.cm
- 8. Life Test :200,000 Cycles (min)

Detail E(2:1) Shaft hole shape and dimension

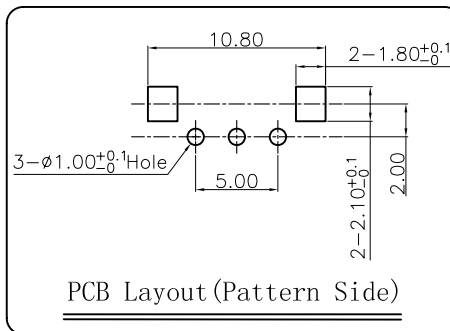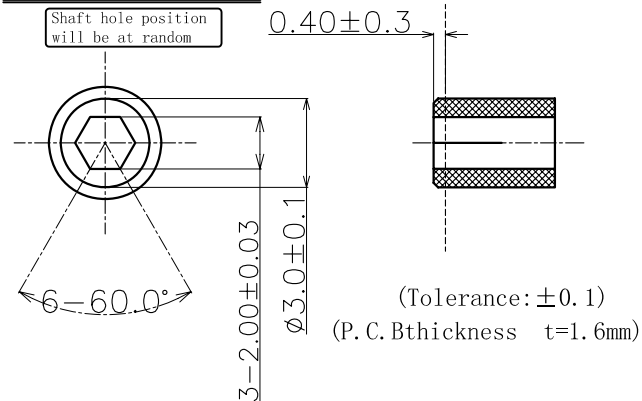

备注：底座背面的压针孔★是根据产品模具成型要求而定的，其规格的大小与数量的多少对产品结构、功能及使用无任何影响。

⑧	Fixed Plate	—	1	Stainless Steel	—	—
⑦	Revolving Wheel	—	1	POM	Black	UL 94HB
⑥	Contact	—	1	Phosphor bronze	—	—
⑤	Base	—	1	PA66	Black	UL 94HB
④	Shell	—	1	Iron	Plating Nickel	—
③	Terminal	3	1	Brass(0.2t)	Plating Silver	—
②	Terminal	2	1	Brass(0.2t)	Plating Silver	—
①	Terminal	1	1	Brass(0.2t)	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DATE

DRAWN

Tanghaihua 2014.01.07

CHECKED

APPROVALS



东莞市凯华电子有限公司
DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD

TITLE:

EN9880 B Type Encoder

PART NO.

CEN988012R07

TOLERANCES ARE

30<L ±0.30
10<L≤30 ±0.20
5<L≤10 ±0.15
L≤5 ±0.10

ANGLE

UNIT: mm

SCALE: 1:1

PROJ:

DRAWING NO.

SHEET 1 OF 1

NEW

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

ECN NO.

REV.

DATE.

4

3

2

1