



2.54mm Pin Header H2.5 Single Row Right Angle SMT

SPECIFICATIONS:

Rated Current	3.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	1000V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au over Ni
Insulator Material	PA6T
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

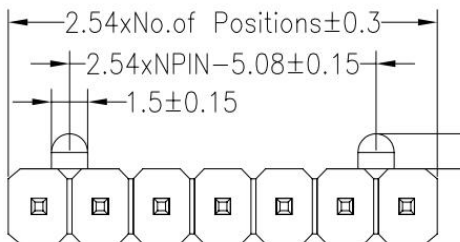

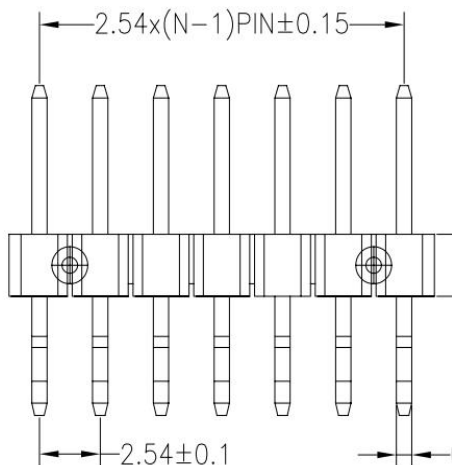

Or

HC Series	No. of Pin Per Row	Insulator Option	W
HC-PH42511	1x01P	A=PBT	W=Post
2.54mm Pin Header	1x40P	B=PA66	
		C=PA6T	
		D=PA46	
		E=PA9T	
		F=LCP	

X=Special


<https://www.dghecon.com> E-mail:sales@dghecon.com

T With Post Series HC-PH42511-Z



ds

Recommended P.C.B Layout(Top
(PCB BOARD TOLERANCE ± 0.05)

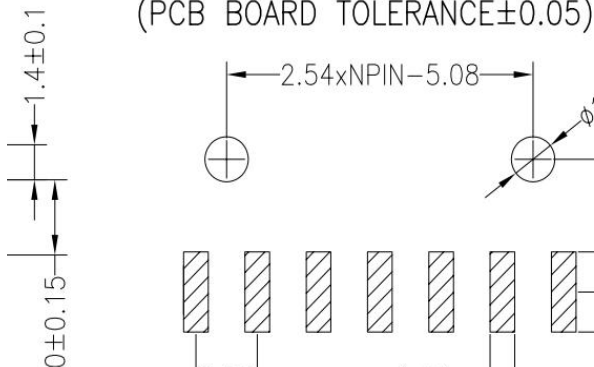


3.0

2.54

1.02

2.5±0.15

-0.64 SQ

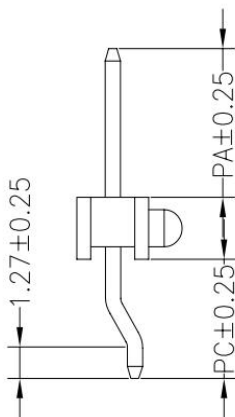

Dimension antithe	
ITEM	PC
Standard	4.83
Alternate	

Ordering Information

Plating	Type	PIN Length
G0=Gold Flash	Z=Right Angle SMT	L=XXX
SN=Tin Plated		Confirm you need size of PA/PC
SM=Matted Tin		
S0=Gold/Tin		
G1=3u Gold		
G2=5u Gold		

G3=10u Gold		
G4=15u Gold		
G5=30u Gold		
S1=3u Gold/Tin		

@dghecon.com Tel: +86-769-8223-6369 Mb:


HECON

东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD



Side)

Ø1.8



eses list
PA
6.00

Packing	End code
0=PE Bag	X
A=Tray	
T=Tube	
P=Tube+Cap	
R=Reel+Cap	
M=Reel+Mylar	

X=Special

86-180-0286-9136

P8