
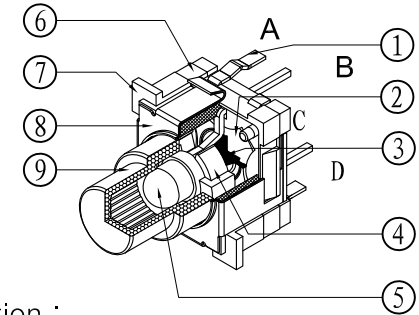


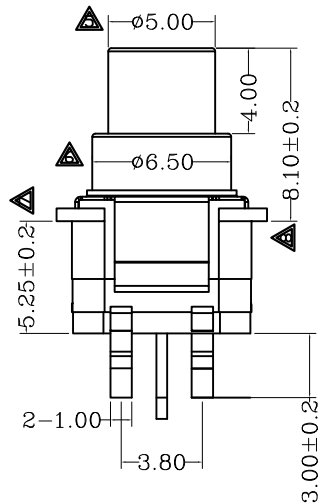
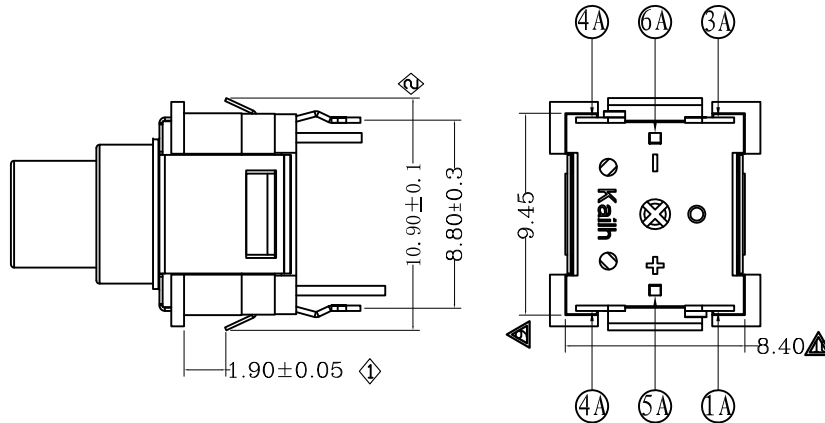


ABIDE BY ROHS



Specification :

1. Rating : DC12V 50mA
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min
4. Withstand Voltage : AC250V (50-60Hz) For 1 minute
5. Operation Force : 450±100gf
6. Life Test : 25,000 Cycles
7. Total Travel : 1.20±0.20mm
8. Operation Type: Touch Restore

NOTE:

- ◇:重点管控尺寸, 一般1到3个, 最多不超过5个, 每次进料及生产均需量测
- ▲:次重点管控尺寸, 序列号排列不得超过17个, 每次进料及生产时均需量测
- △:一般尺寸, 个数不限, 每次模具变动时才需量测
- 版次定义:新开发而未转量产之产品图面版次为A₀、A₁、A₂
- 已转量产之产品图面版次为A、B、C

9	Keystoke	1pcs	PC	Transparent		
8	Shell	1pcs	Stainless Steel			
7	Cover	1pcs	PA6T	Black		
6	Base	1pcs	PA6T	Black		
5	LED	1pcs	#2.8mm Super Bright Yellow&Green LED			
4	Pad	1pcs	LCP	Black		
3	Rubber pad	1pcs	Rubber	Gray		
2	Contact	1pcs	Stainless Steel	Plating Au(4u")		
1	Terminal	A.B.C.D	4pcs	Brass	Plating Au(3u")	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE	 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO.,LTD			
DRAWN	刘志勇	2011. 06. 23				
CHECKED			TITLE:	LA9313 LAMP SWITCH		
APPROVALS			PART NO.	LA931301D02		
TOLERANCES ARE		30<L±0.30 10<L≤30±0.20 5<L≤10±0.15 L≤5±0.10	ANGLE	UNIT: mm	SCALE:	PROJ: 
		±2'	DRAWING NO.		SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			