

SCR

Heat Sink: Aluminum



MP



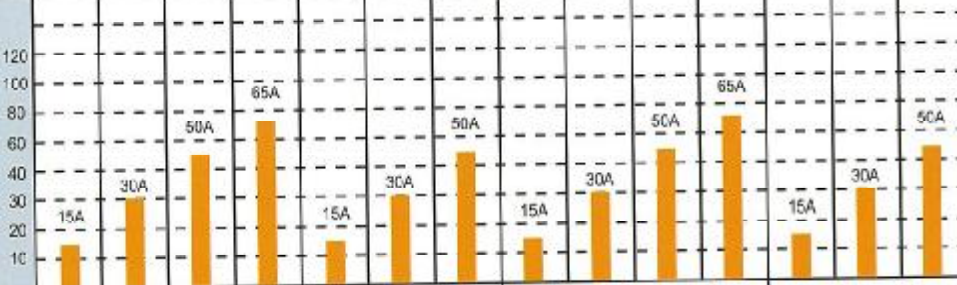
(42)



(82)

MAXTHERMO

Miniature S. C. R. Power Regulator

Model No.	MP														
	2415D	2430D	2450D	2465D	3815D	3830D	3850D	—	—	—	—	—	—	—	
Dimensions (Unit: mm)															
															
Load Current Rating (A)															
															
Load Voltage (V)															
	100~260V				—				100~260V				—		
To Take Pressure	1200		800		1200		1200		800		1200				
Ambient Temp.	Operating: 0~50°C, Storage: -10~70°C														
RH	0~90%														
Auxiliary Power	—														
Min Load Current	—														
Off State Leakage Current	—														
Power Consumption	—														
Frequency Range	50Hz / 60Hz														
Control Type (Input)	0~20mA	—						—							
	4~20mA	•						—							
	0~5V	—						—							
	1~5V	—						•							
	0~10V	—						—							
	2~10V	—						—							
Strength of Press-resisted	2500 VAC / 1 Min between power & external cover														
	1000 VAC / 1 Min between power & input signal														
Isolation Resistance	Over 20 MΩ (power & external cover)														
	Over 20 MΩ (input signal & external cover)														
Alarm	—														
Notation	Single phase 1 pole														
Net Weight (g)	Approx. 125														
Features	1. Single phase 1 pole, zero cross control. 2. Miniature size as "SSR" most suitable for small ampere and miniature equipment use to less the cost but increase the value of equipment. 3. Input signal can be ordered with 4~20mA / 1~5VDC / VR100K. 4. CE Approval.														