




SIGN	DESCRIPTION	DATE	APPROVER



N=Number of contacts

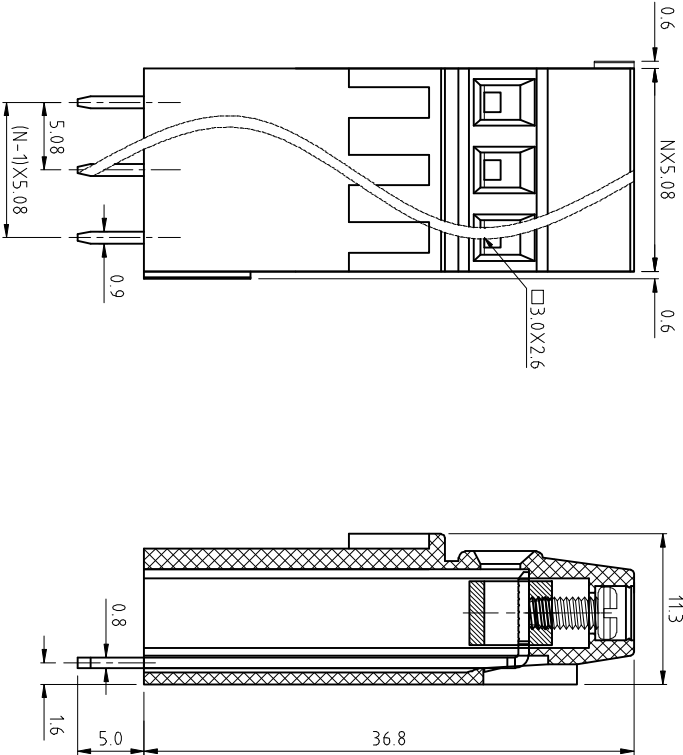

P.C.B LAYOUT



Technical Data:

Material:

Contact(metal housing): Copper Alloy with Ni plated

Terminal screw: Steel galvanized with Cr3+ plated

Solder Pin: Copper Alloy with Tin plated

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 12-30AWG

Mechanical:

Torque: 4.5kgf.cm/M2.5

Operating temperature: -40°C to +105°C


Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F35-3-E XX-X X 0 X 0

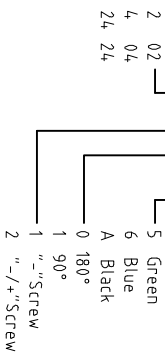

WELINK 恒翔電子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F35-3 Pitch5.08mm
X.X ±0.30	DRAWN: Yang Ming	series
X.XX ±0.20	2012.11.20	
X° ±1°	UNITS: mm	REV: A
	SCALE: 2.5 / 1	PAGE: 1 / 1
		DWG NO: 9F353E001A