




702X SERIES



SPECIFICATION

RATING	: 15A 125VAC , 10A 250VAC (UL,C-UL) 20A 125/250VAC (IN HOUSE TEST)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 55 °C
ELECTRICAL LIFE	: 6,000 CYCLES

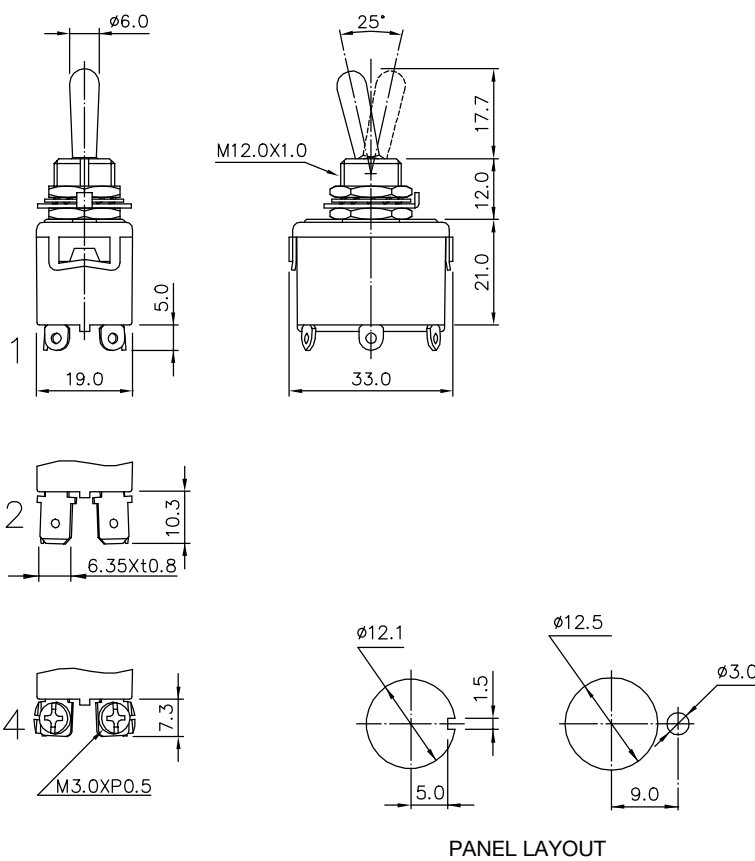

():MOMENTARY

SWITCH FUNCTION					
MODEL NO.	 KEY WAY	 KEY WAY	 KEY WAY	OPERATIONS	APPROVAL
7021	ON	----	OFF	DPST	
7022	ON	----	ON	DPDT	
7023	ON	OFF	ON	DPDT	
7024	(ON)	OFF	----	DPST	
7025	ON	----	(ON)	DPDT	
7026	(ON)	OFF	(ON)	DPDT	
7027	ON	OFF	(ON)	DPDT	

TERMINAL'S TYPE	
1	SOLDER TERMINAL
2	QUICK TERMINAL
4	SCREW TERMINAL