




REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

TFT Interface

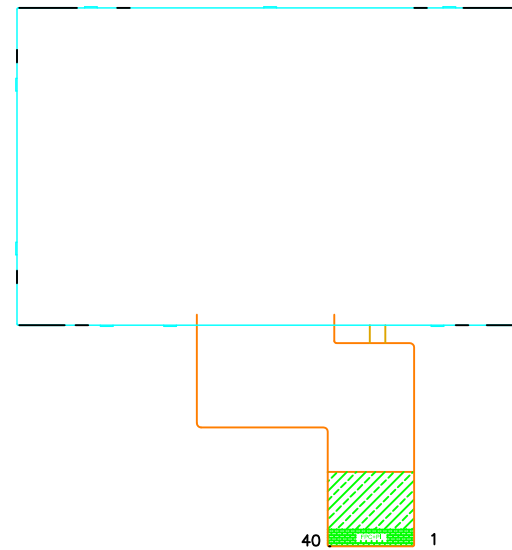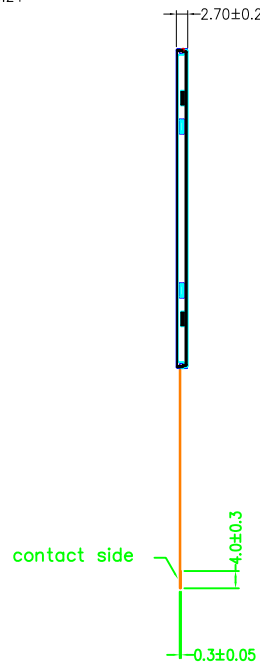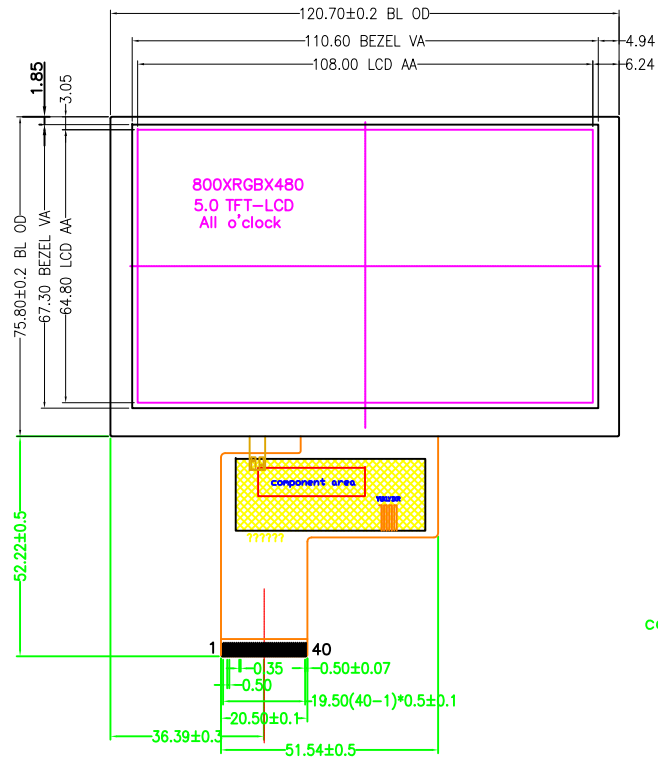

Specification:

- 1). Viewing angle: ALL
- 2). Display mode: TFT/IPS/Transmissive/Normal Black
- 3). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 4). IC: ST7262 or Equivalent
- 5). Brightness: 600cd/m²
- 6). All the raw material are Rohs complicant
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). General Tolerance: ±0.2.

LED CIRCUIT:



VLED=16.8~19.8V, ILED=60mA

CONTROL DIMENSION:					
REFERENCE DIMENSION:	()				
APPROVED:	JOBS				
CHECKED:	ERIC				
DESIGNED:	ISSCA				
			XINSUN DISPLAY INTEGRATION		
			MODEL NAME	3rd ANGLE	⊕
			PART NAME	UNIT	mm
			DRAWING NUMBER	SCALE	1:1
			MATERIAL NUMBER	PAGE	1/1