




**701X
SERIES**



SPECIFICATION

RATING	: 15A 125VAC , 10A 250VAC (UL,C-UL) 20A 125/250VAC (IN HOUSE TEST)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 55 °C
ELECTRICAL LIFE	: 6,000 CYCLES

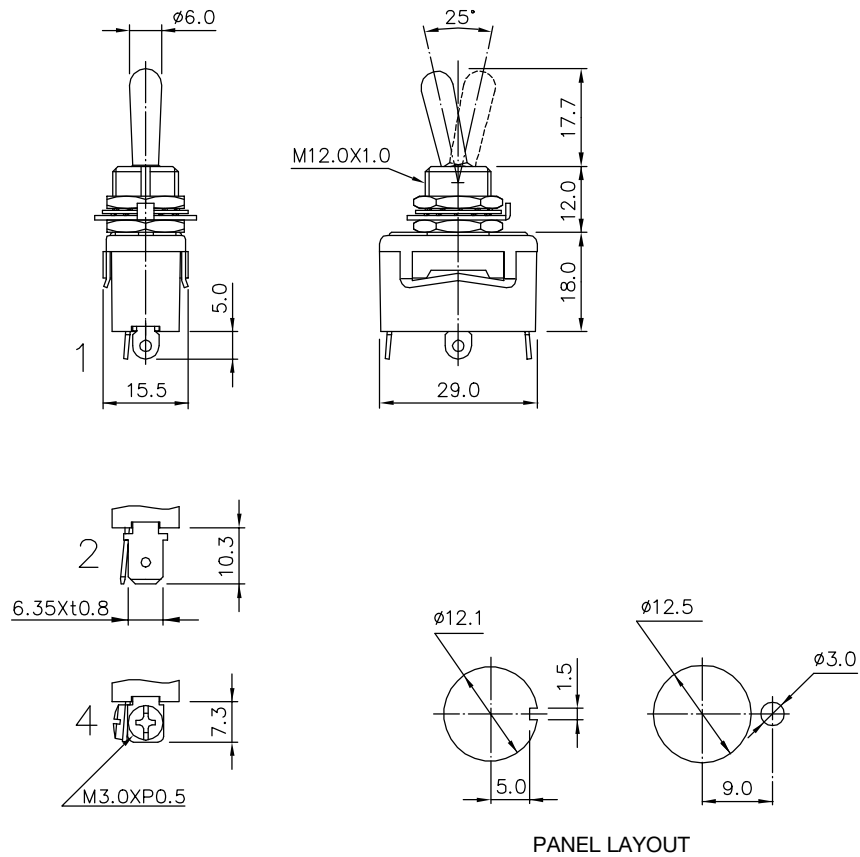

():MOMENTARY

SWITCH FUNCTION					
MODEL NO.	KEY WAY	KEY WAY	KEY WAY	OPERATIONS	APPROVAL
7011	ON	----	OFF	SPST	
7012	ON	----	ON	SPDT	
7013	ON	OFF	ON	SPDT	
7014	(ON)	OFF	----	SPST	
7015	ON	----	(ON)	SPDT	
7016	(ON)	OFF	(ON)	SPDT	
7017	ON	OFF	(ON)	SPDT	

TERMINAL'S TYPE	
1	SOLDER TERMINAL
2	QUICK TERMINAL
4	SCREW TERMINAL