
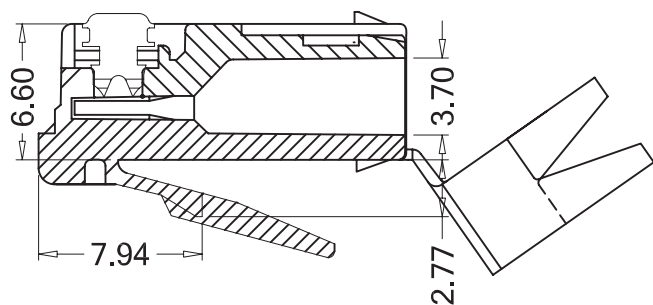
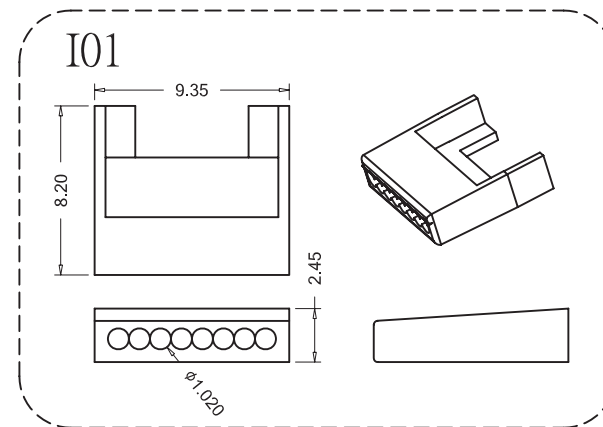
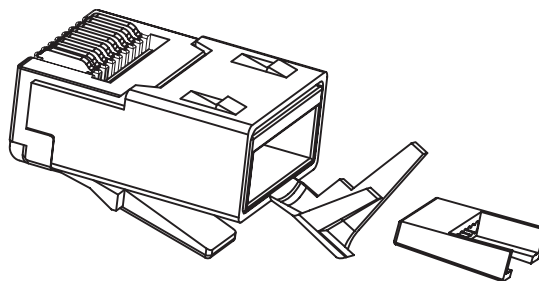
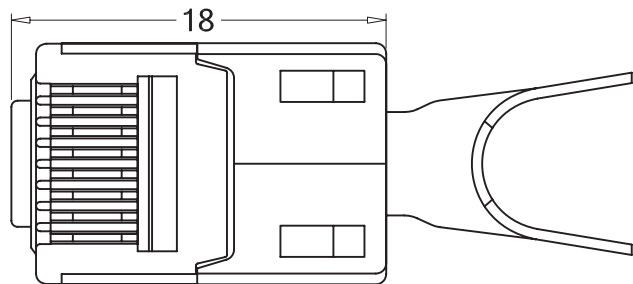



A :stranded wire

V :solid wire
stranded wire

H :solid wire

ORDER INFORMATION:

S7901AF888

1:gold plating01u"
2:gold plating03u"
3:gold plating06u"
4:gold plating15u"
5:gold plating30u"
6:gold plating50u"



speal ercognition code

A:94-V2

V:94-V0

terminal shape code
(A.VorH)

Electrical:

1. Voltage rating : 125 VAC RMS .
2. Current rating : 1.5 A .
3. Contact resistance : 50 milliohms max.
4. Insulation resistance : 1000 megaohms min @ 500 VDC.
5. Dielectric strength : 1000 VAC RMS 50Hz, 1MIN.

Material & finish:

Housing: PC, clear

Contact : copper alloy plated with gold

Operating temperature:-40 °C to +80 °C

未注公差 (mm)

x	±0.30
.x	±0.20
.xx	±0.15
.xxx	±0.05
x°	±2.0

东莞市华翔电子有限公司

TEL: 0769-81629088

FAX: 0769-85351917


WEB: www.YL-best.com

核
准審
查設
計

吴玉婷

DATE

2011/03/10



SCALE

1:1

REV

B.0