



***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

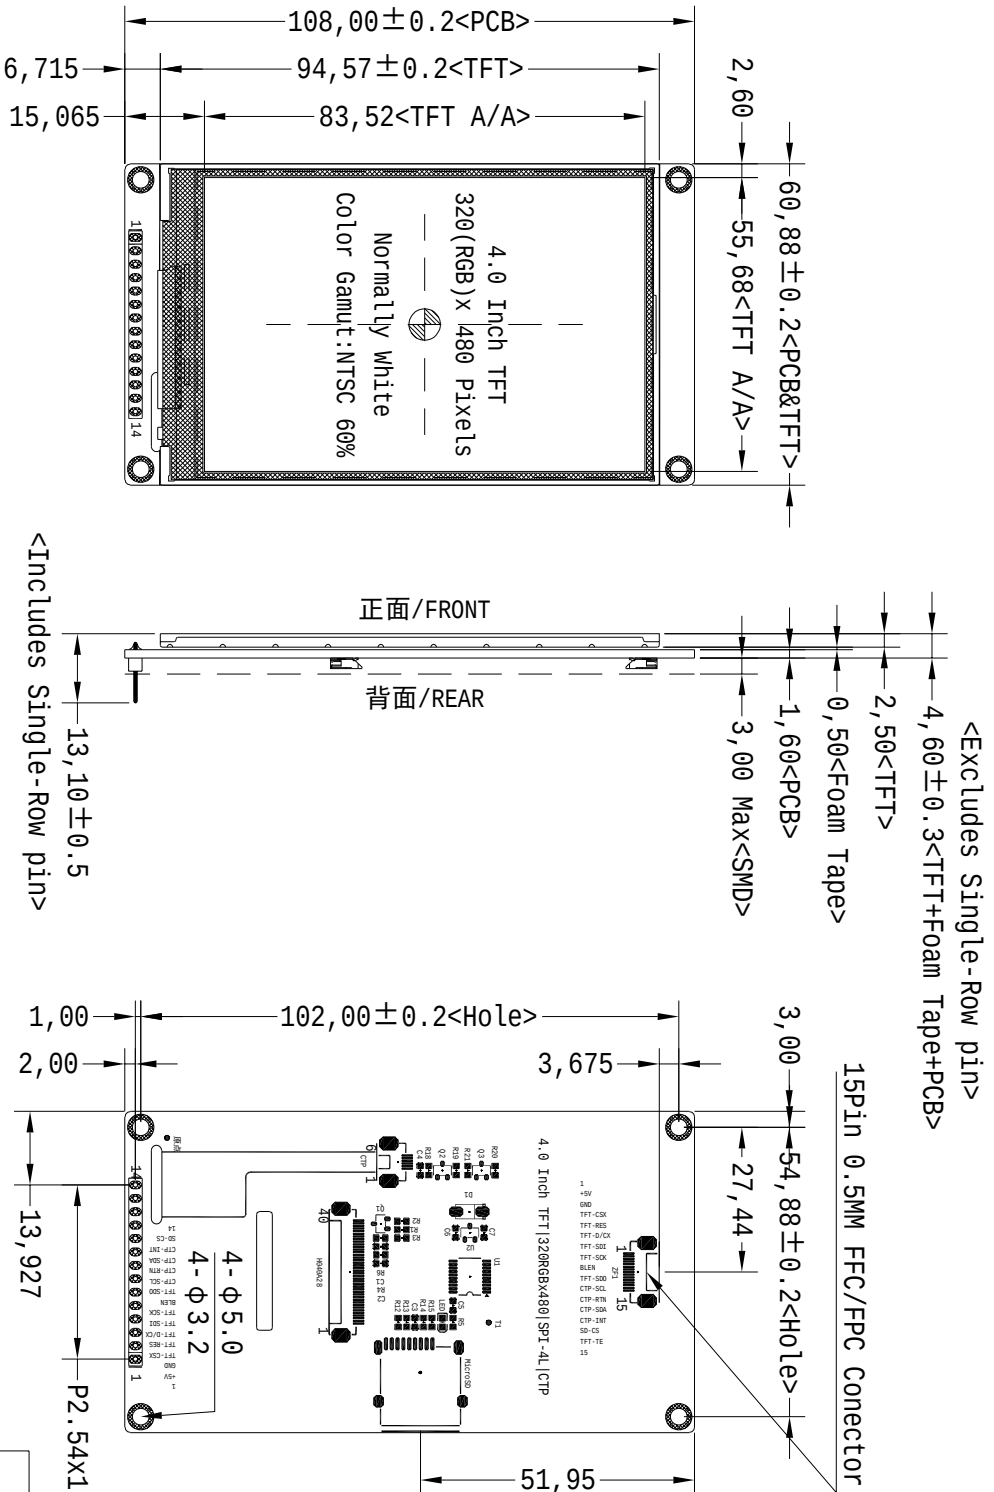

字体：黑体
bold (typeface)

ZF Pin_SIGNAL	HDR Pin_SIGNAL
1 +5V	1 +5V
2 GND	2 GND
3 TFT-CSX	3 TFT-CSX
4 TFT-RES	4 TFT-RES
5 TFT-D/CX	5 TFT-D/CX
6 TFT-SDI	6 TFT-SDI
7 TFT-SCK	7 TFT-SCK
8 BLEN	8 BLEN
9 TFT-SDO	9 TFT-SDO
10 CTP-SCL	10 CTP-SCL
11 CTP-RTN	11 CTP-RTN
12 CTP-SDA	12 CTP-SDA
13 CTP-INT	13 CTP-INT
14 SD-CS	14 SD-CS
15 TFT-TE	

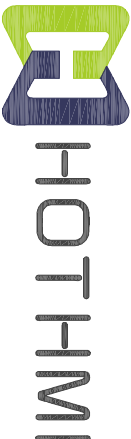

产品型号 HTM-H040A28-SPI-A01

Product model	设计制图	日期
比例 1:1	Liu.YL	2024-06-15
Scale	Design	Date
版本 V0-0	单位 MM	公差 ±0.3
Ver	Unit	Tol.