



WB-PP-4124

UTP Cat6 24 Ports Patch Panel

KEY FEATURE

Design to mount to any standard 19" rack or cabinet, 24-port Cat 6 Patch panel
Space saving, high-density 1U

Black Electrostatic Powder-Coated Steel: phosphor bronze with tin Plating over nickel . Meet or exceed the requirement of ANSI /TIA/EIA 568B.2

Use keystone jacks and keystone inserts to configure your panel to accommodate a variety of schemes

Sturdy Aluminum Plate around RJ 45 Jacks

Phosphor bronze with 6-50 micro inches gold plated

Available with T568 A, T568 B wiring pattern and meeting the requirement of Cat 6 standard

Color Coded TIA/EIA 568A (international) and 568B (AT&T Standard)

Termination accepts 22, 24, 26 AWG (0.64, 0.5 and 0.4)solid wires

Metal sheet: Corrosion resistant steel

Plastic: fire self -extinguish high impact plastic

Body color:RAL9004(black);RAL7035(grey) or other colors for options

Voltage Rating :125 VAC RMS

Current Rating : 1.5AMP


Electronic

Contact Resistance:110 Milliohms MAX.

Insulation Resistance:1 000 megohms MIN 500 VDC

Dielectric Strength :750 VAC RMS 60Hz ,1 MIN

DETAILED IMAGES

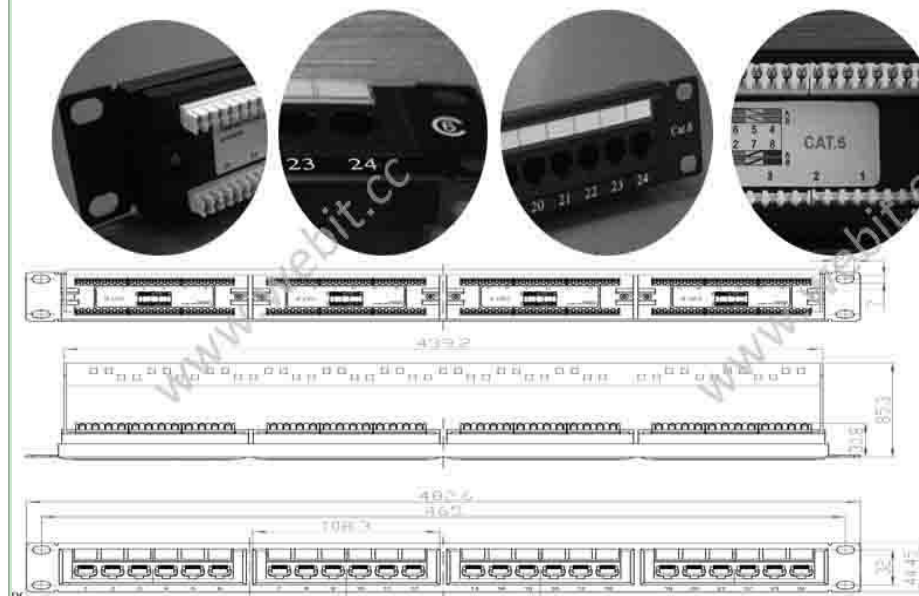

Product Code	Product Description
WB-PP-4124	Cat6 UTP Patch Panel