




48 Port Horizontal Mount Category 6 Patch Panel  
NT-C6-48P

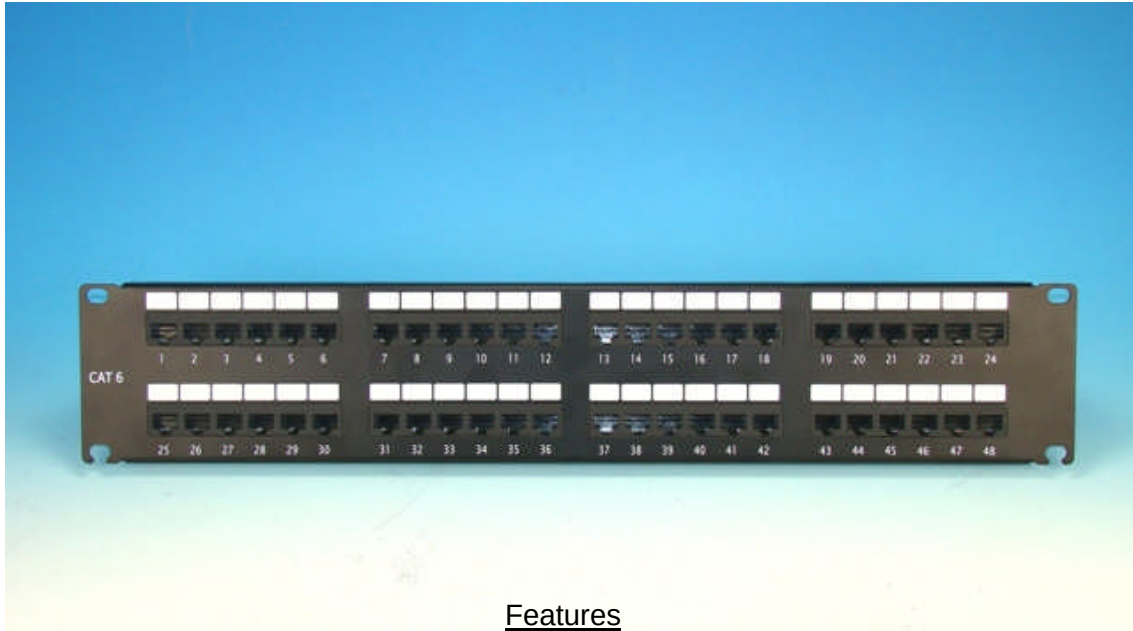

Features

Premium Quality  
Category 6 certified to meet all Cat 6 specifications  
Engineered for high speed transmissions for optimal performance  
Color coded TIA/EIA 568A (international) and TIA/EIA 568B (AT&T standard) wiring  
Industry standard 110 or Krone IDC connectors  
Rear Cable Management Bracket/Strain Relief Bar  
Includes tie wraps and mounting screws  
Panels include port numbering and write-on labeling areas  
25 Year Warranty

Material Standards

Metal Frame  
IDC plastic: PC, UL 94V-O  
IDC contact: Phosphor bronze w/ 200u" tin over  
100u" nickel undercoat  
Spring wire: Phosphor bronze w/ 50u" gold over  
100u" nickel undercoat  
Temperature: -40°C - 68°C  
Humidity: 10% - 90% RH  
Modular jack: 750 mating cycles  
IDC block: 200 termination cycles

Electrical Standards

Current Rating: 1.5A  
Voltage: 150V  
Insulation Resistance: 500m Ohm  
Contact Resistance: 20m Ohm  
DC Resistance" 0.1 Ohm

**Netlink**

Tel: 86-755-29431861  
Web: [www.sznetlink.com](http://www.sznetlink.com)

TITLE CAT6 48 PORT PATCH PANEL