
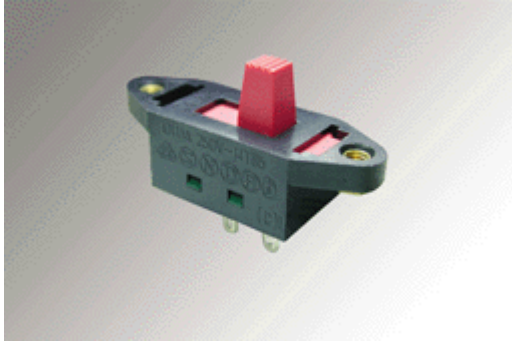
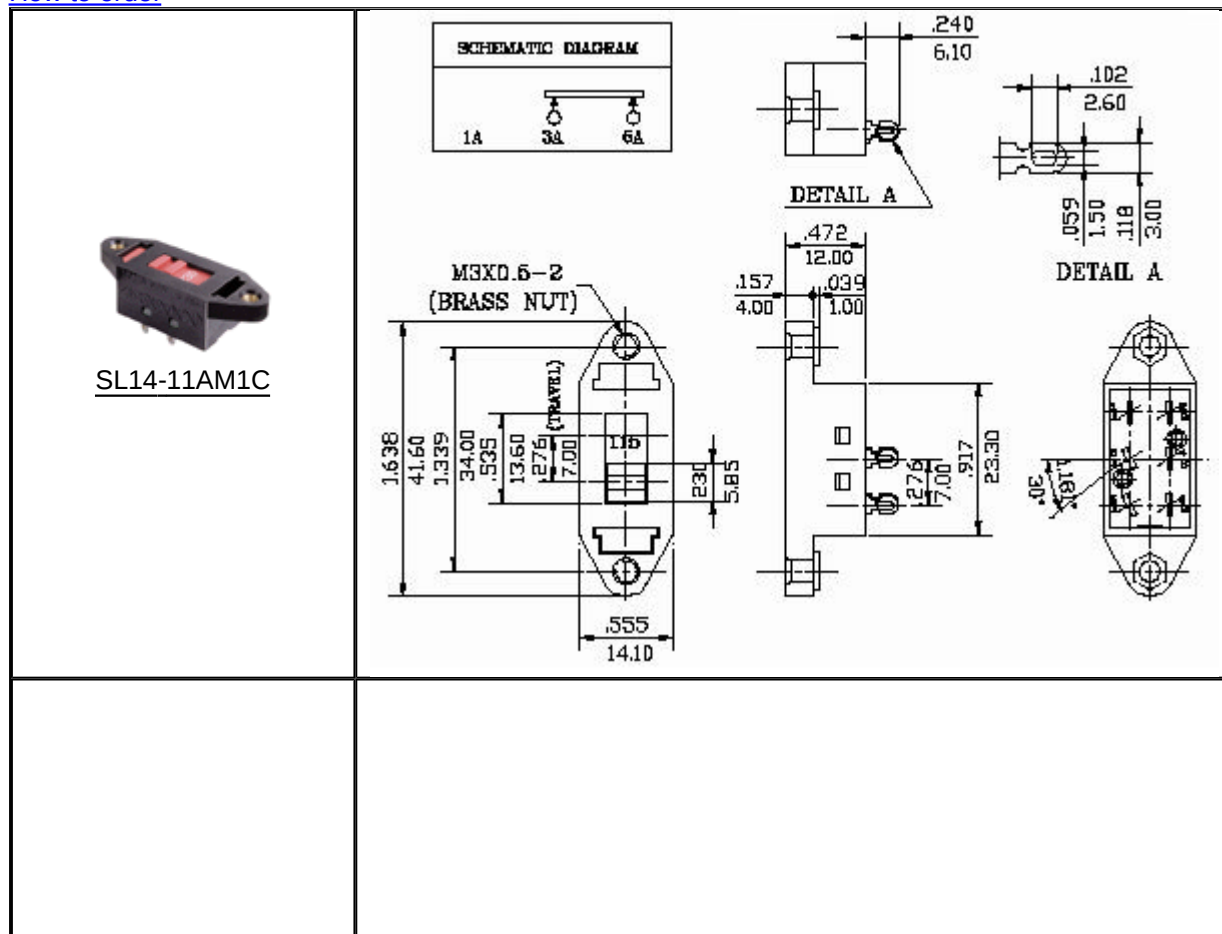


SL14 SERIES**SLIDE SWITCHES AND VOLTAGE SELECTOR UP TO 12A 250VAC****Double poles, panel or PCB mounting, solder lug, right angle terminals**

- | | |
|---|---|
| 12A 125/250VAC (UL), 4A 300VAC(UL) | Dielectric strength : 1000VAC FOR 1 MINUTE |
| 10A 125/250VAC (CSA NRTL/C), | Enclosure : PBT / Nylon, UL rated 94V-2 min |
| 10(1)A 250VAC (CQC) | Actuator : PBT, UL rated 94V-2 min |
| 10(1)A 250V~μT85 (VDE, ENEC) | Base : PBT / Phenolic, UL rated 94V-2 min |
| 4(2)A 250V~μT85 (VDE, ENEC) | Terminals : Silver plated Copper |
| Contact resistance : 20m ohm (MAX). | Contact : Silver plated copper |
| Insulation resistance : 100M ohm (MIN), DC 500V | Spring : Stainless wire |

[How to order](#)



SL14-23CJ0H

