
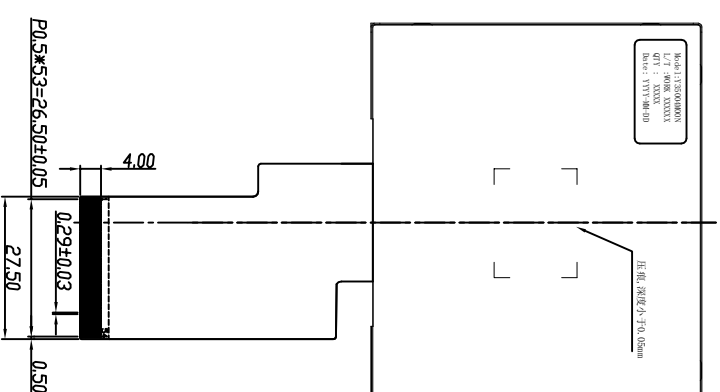


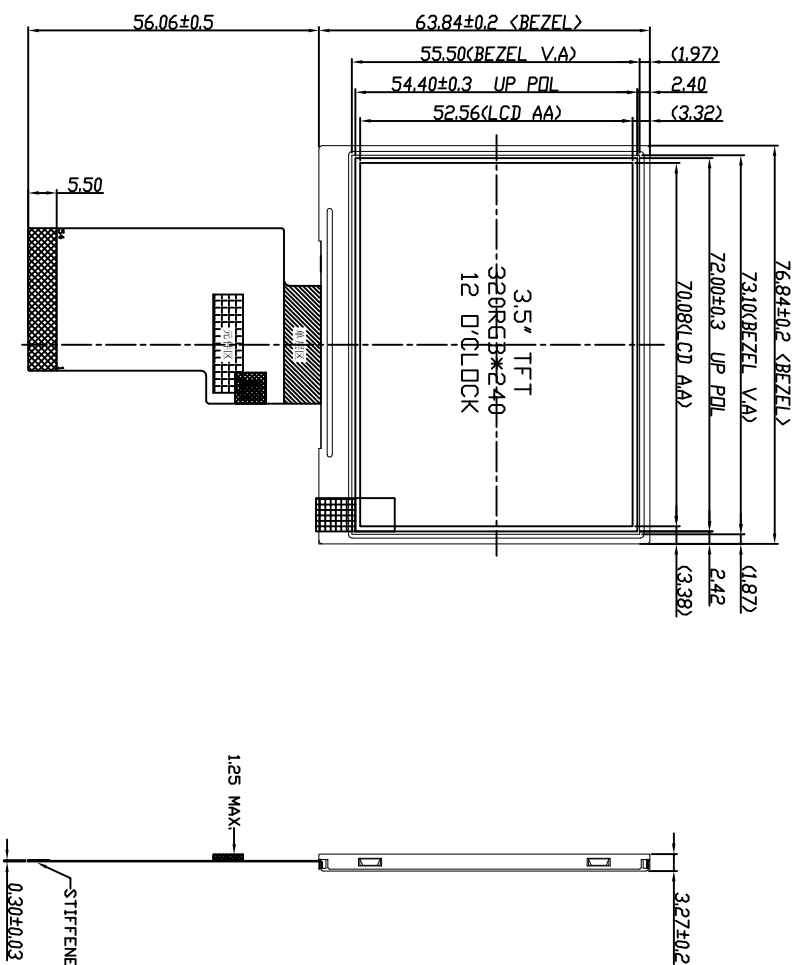


PIN	SYMBOL
1	VBL-
2	VBL-
3	VBL+
4	VBL+
5	NC
6	NC
7	NC
8	RESET
9	SPENB
10	SPCK
11	SPDA
12-19	BO-B7
20-27	GO-G7
28-35	RO-R7
36	HSYNC
37	VSYNC
38	DOTCLK
39	NC
40	NC
41	VCC
42	VCC
43	NC
44	NC
45	NC
46	NC
47	NC
48	XR
49	YD
50	XL
51	YU
52	DEN
53	GND
54	GND

上片不能压在铁框下面

NOTES:

1. DISPLAY TYPE: 3.5" a-Si Transmissive TFT, 16.7M color.
2. VIEWING DIRECTION: 12:00 O'CLOCK.
3. LCD DRIVER:HX8238-D
4. DRIVING METHOD:—
5. LOGIC VOLTGE: VDD=3.0~3.6V.
6. BACK-LIGHT: 6 White LEDs Serial, 20mA.
7. OPERATING TEMPERATURE: -20°C ~ +70°C.
8. STORAGE TEMPERATURE: -30°C ~ +80°C.
9. "*" IS CRITICAL DIMENSION.
10. "()" IS REFERENCE DIMENSION.
11. PRODUCT CONFORM TO RoHS COMPLIANCE REQUIREMENT.

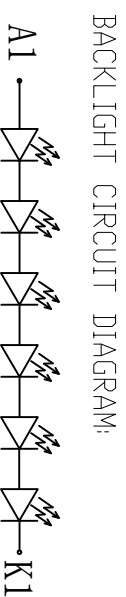

	TOLERANCE FINISH	UNITS	X×X ±0.3 Y×Y ±0.2
△	DIMENSIONS IN MM	SIZE A4	A4
△	MATERIAL PART MATERIAL	FINISH	F-1
▽	SCALE: DRAWING SCALE THICKNESS 1:6MM(0.2MM)	SIGN	DATE
△			
REQUIREMENT.			
△	DRAWN BY	CHECKED BY	DRAWN DATE
/A/	First	20151125	LONG
ISSUE	AMENDMENT	DATA NAME	APPROVED APPROVED BY
三圆科技有限公司 SAN YUAN TECHNOLOGY CO.,LTD			
TITLE: MODULE_SPECIFICATION			
ITEM NO.: Y35004MOON		REV.: V0	
DWG NO.: Y35004MOON		SHEET: 1 /	