




TOP VIEW

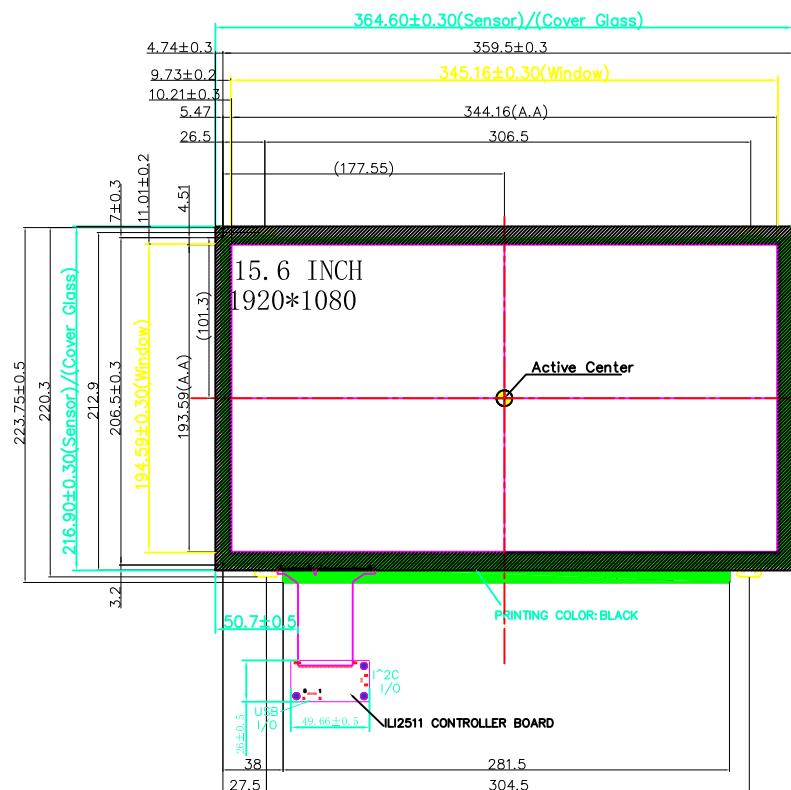

SIDE VIEW

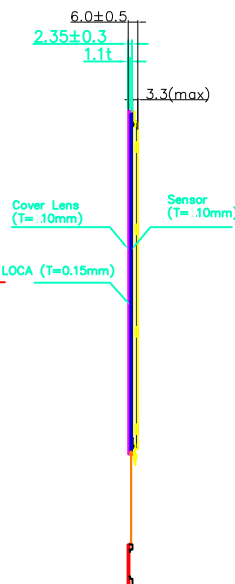


BOTTOM VIEW

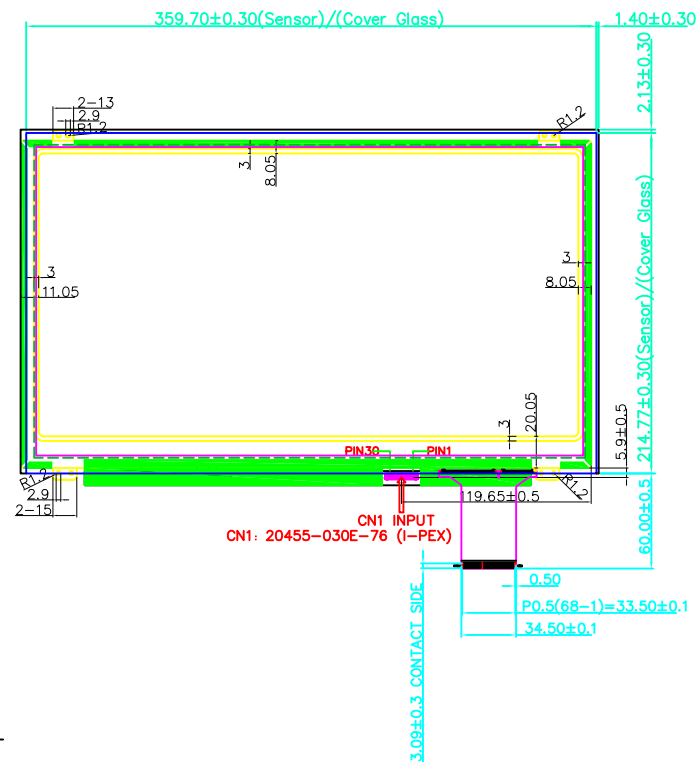

Interface for TFT

1	NC
2	H_GND
3	Lane1_N
4	Lane1_P
5	H_GND
6	Lane0_N
7	Lane0_P
8	H_GND
9	AUX_CH_P
10	AUX_CH_N
11	H_GND
12	LCD_VCC
13	LCD_VCC
14	NC
15	LCD_GND
16	LCD_GND
17	HPD
18	BL_GND
19	BL_GND
20	BL_GND
21	BL_GND
22	BL_ENABLE
23	BL_PWM_DIM
24	NC
25	NC
26	BL_PWR
27	BL_PWR
28	BL_PWR
29	BL_PWR
30	NC

LED CIRCUIT



TFT NOTE:

1. LCD TYPE : 15.6" ,TFT ,IPS
2. VIEWING DIRECTION:
WIDE VIEWING 85/85/85/85
3. BRIGHTNESS: 170cd/m2 min at ILED=80mA
4. OPERATION TEMP.: 0°C~50°C
5. STORAGE TEMP.: -20°C~60°C
6. NON-MARK TOLERANCE is ±0.3mm
7. ROHS CPMPPLAIN

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:	()		
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		MATERIAL NUMBER	PAGE



XINSUN DISPLAY INTEGRATION

MODEL NAME

PART NAME

DRAWING NUMBER

MATERIAL NUMBER

3rd ANGLE

UNIT

SCALE

PAGE