



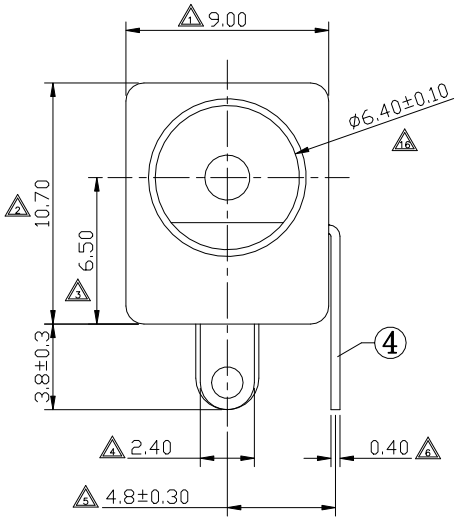


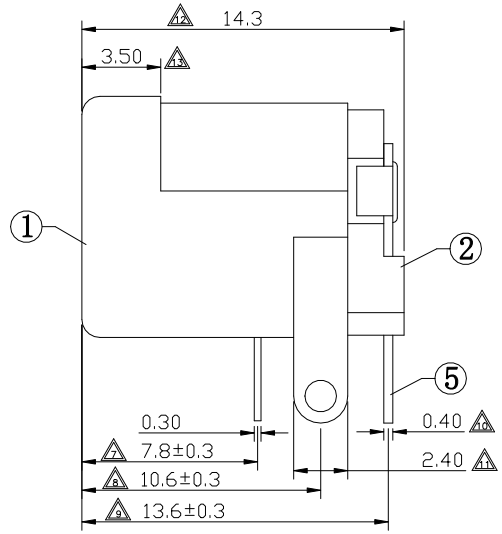

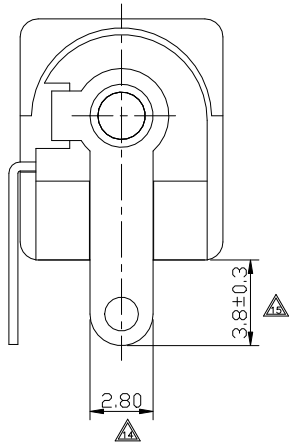


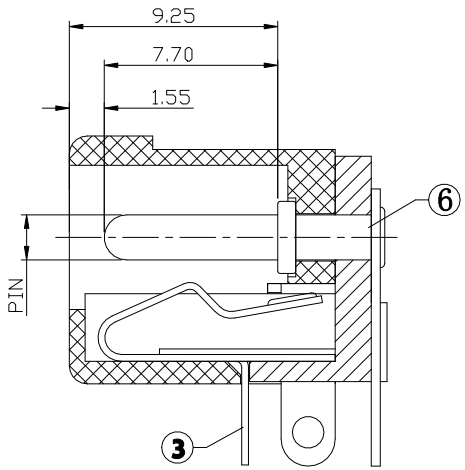

SCHEMATIC



P.C.B LAYOUT
TOP VIEW

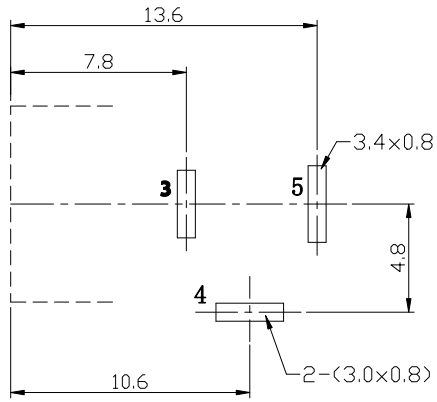

PIN	ø1.65	ø2.0	ø2.5
APPD			✓

SPECIFICATION

1. Rating : DC 24V 3.0A;
2. Contact resistance: ≤0.03Ω;
3. Insulation resistance: ⩾100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3–30N;
6. life test: 5,000 cycles。
7. Marked △ are important dimensions.

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
6	PIN	1	BRASS	———	Ni–Plating
5	FLAT FOOT	1	BRASS	———	Sn–Plating
4	CURVE PIECE	1	BRASS	———	Sn–Plating
3	SPRING PIECE	1	BRONZE	———	Sn–Plating
2	COVER	1	PBT	———	———
1	HOUSING	1	PBT	———	———

ECN(DCN) NO	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	0	12'/06/04	NEW	Steven	Max.hu

DESIGN	Steven	12'/06/04
CHECK	Jason	12'/06/04
APPRO	Max.hu	12'/06/04

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X °± 3°
X.X ± 0.30	X.X °± 2°
X.XX ± 0.20	X.XX °± 1°
X.XXX ± 0.10	

盛 聰 电 子 有 限 公 司
SHENG CONG ELECTRONIC CO.,LTD

CUSTORMER COPY

TITLE: DC-JACK

PART NO. DJ-D506

PROJ: | SCALE: 3:1 | UNIT:mm | SIZE: A4 | SHEET: 1 OF 1

Pb Process Capable RoHS Compliant

Level-1 Controlled Substances are banned

Original: Design: Steven Check: Jason Appro: Max.hu Date: 12'/06/04