




ABIDE BY WEEE & ROHS

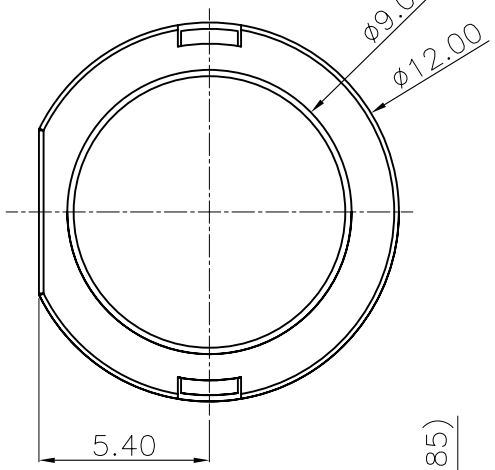

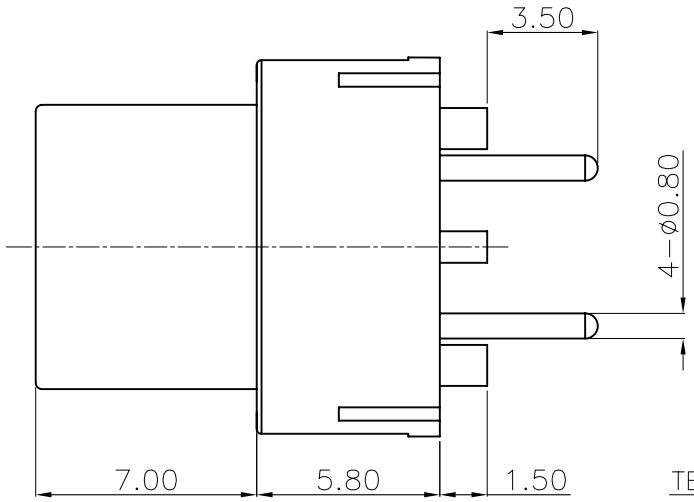

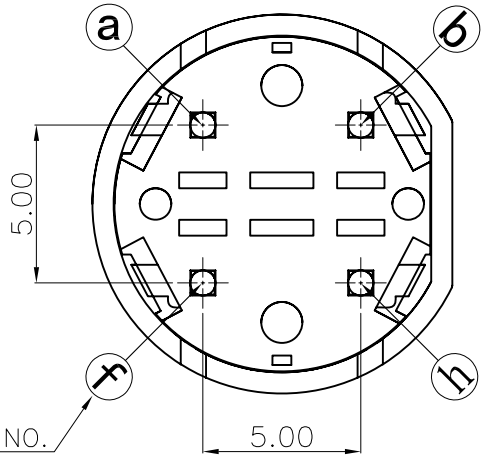


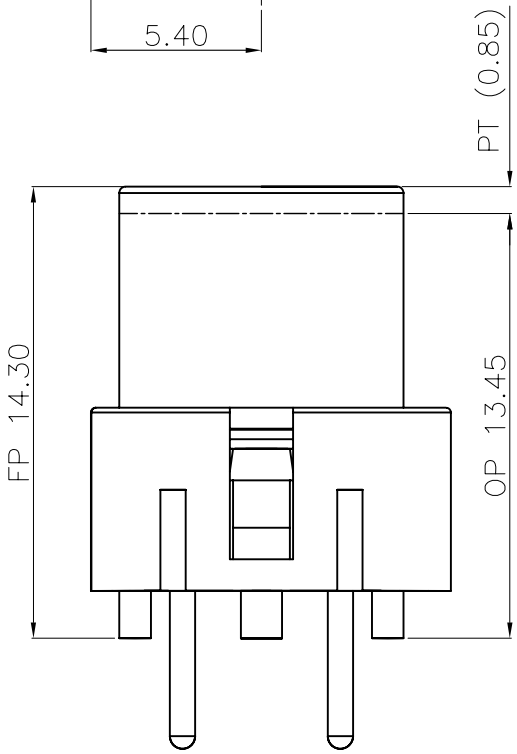

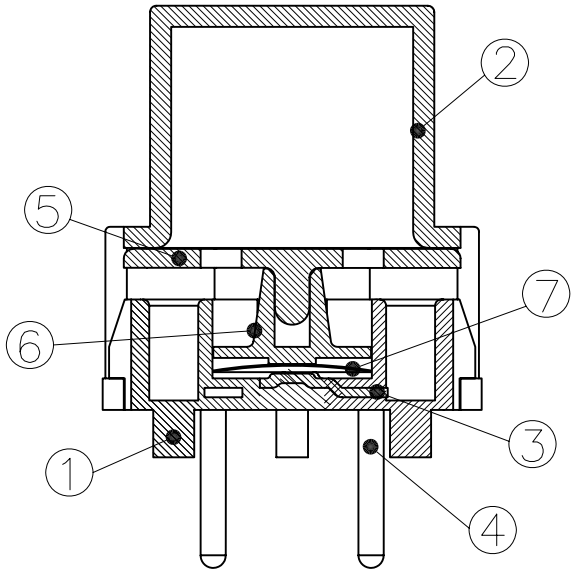

General Specifications

1. Contact resistance: 100mΩ MAX;
2. Insulation resistance: 100MΩ MIN;
3. Operation force: 250±50gf;
4. Operation Life: 100,000 Cycles.



ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	SHRAPNEL	——	1	STAINLESS STEEL	NATURAL	——
⑥	RUBBER PAD	——	1	RUBBER	NATURAL	——
⑤	CUSHION	——	1	POM	WHITE	——
④	TERMINAL (2)	a b f h	4	BRASS	Ag-PLATED	——
③	TERMINAL (1)		1	BRASS	Ag-PLATED	——
②	COVER	——	1	PC	WHITE	——
①	HOUSING	——	1	PBT	WHITE	——

APPROVALS		DATE
DRAWN	Panhao Lv	2008.08.22
CHECKED		
APPROVALS		

Kailh 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO.,LTD

TOLERANCES ARE			ANGLE
	30<L	±0.30	
	10<L≦30	±0.20	
	5<L≦10	±0.15	±2°
	L≦5	±0.10	

TITLE:	TA1260
PART NO.	TA126001D01
UNIT: mm	SCALE: 2:1
DRAWING NO.	PROJ:
	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A0		NEW			