


UL2835

BORT cable

RoHS & REACH compliant

环保引领未来

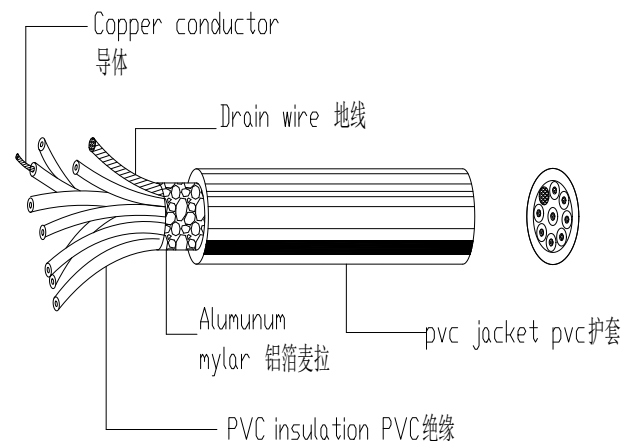

产品说明

PRODUCT DESCRIPTION

- ★Rated temperature: 60 °C
- ★Rated voltage: 30V
- ★According to the standard: UL758,UL1581,CSA C22.2 No.210.2
- ★Stranded,tinned or bare copper, or tinsel conductor
- ★Color-coded PVC or PE or PP insulation
- ★Tinned or bare Copper drain wire
- ★Tinned or bare Copper wire braid shield available
- ★PVC jacket
- ★Passes UL VW-1 & CSA FT1 vertical flame test
- ★Uniform insulation thickness to ensure easy stripping and cutting
- ★Environmental testing pass RoHS
- ★For internal wiring in Class 2 circuits of electronic equipment or TV game machine data transmission

Cores	Conductor			Insulation			Overall Shield		Jacket		Maximum Resistance at 20℃ Ω/km
	AWG	No./mm	Nom. Dia.	Nom.Thick.	Nom.Dia.	Drain Wire	Material	Spiral No./mm Braid No./No./mm	Nom.Thick.	Nom.Dia.	
			mm	mm	mm	No./mm	mm		mm	mm	
4	28	7/0.127	0.38	0.22	0.82	—	AL	57/0.1	1.00	4.30	223.00
4	22	17/0.16	0.76	0.22	1.20	17/0.16	AL	—	0.45	4.00	57.50
5	28	19/0.08	0.40	0.20	0.80	—	PAPER	16/6/0.12	0.88	4.80	220.00
6	28	7/0.127	0.38	0.22	0.82	—	AL	79/0.1	0.68	4.30	223.00
7	28	7/0.127	0.38	0.26	0.9	7/0.16	—	75/0.12	0.90	5.00	223.00
7	32	TINSEL	0.56	0.22	1.00	7/0.16	—	16/7/0.1	0.75	5.20	1000.00
8	28	19/0.08	0.40	0.23	0.86	—	PAPER	24/5/0.1	0.74	4.80	220.00
9	28	7/0.127	0.38	0.22	0.82	—	PAPER	81/0.12	0.74	4.90	223.00
10	28	7/0.127	0.38	0.26	0.90	7/0.16	AL	—	0.57	5.00	223.00

博尔特（漳州）电缆有限公司