



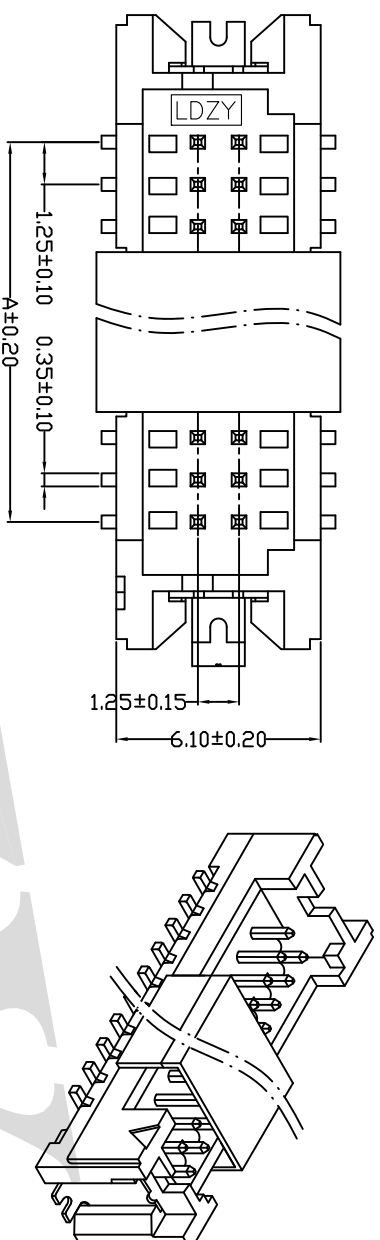


## ■ Specifications

- Voltage Rating: 150V AC/ DC
- Current Rating: 1A AC/ DC
- Withstanding Voltage: 500V AC/Minute.
- Insulation Resistance: 500M $\Omega$  Min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial Value/20m $\Omega$  Max.
- After Environmental Testing 30m $\Omega$  Max.

■ Wafer

- Part No.: A1252WVS-2NP-9TNAG
- Poles: 10、12、14、20、24、30、40、50
- Material: Pin: Brass/Gold-Flash Or Gold-Flash 15u"  
Solder Tabs: Brass/Gold-Flash Or Gold-Flash 15u"  
Wafer: PA9T UL94V-0  
Cap: PA9T UL94V-0
- Q'ty: 1,000 Pcs/Reel

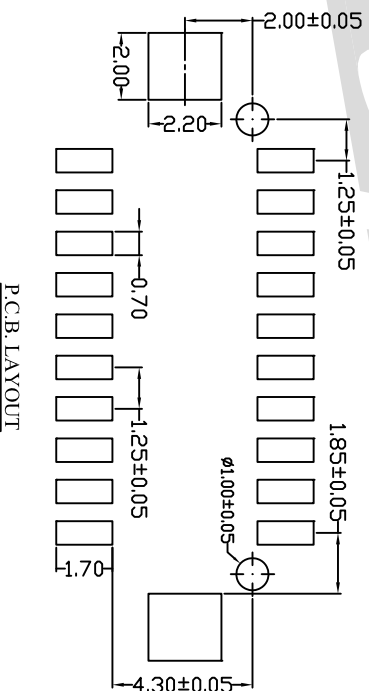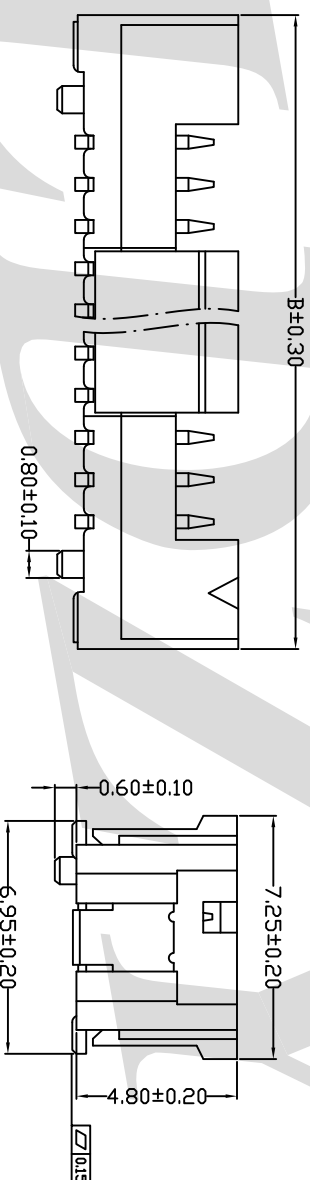

P.C.B. LAYOUT

| Poles | Part No | Dimensions (mm) |       |
|-------|---------|-----------------|-------|
|       |         | A               | B     |
| 10    | 2*05P   | 5.00            | 12.50 |
| 12    | 2*60P   | 6.25            | 13.75 |
| 14    | 2*07P   | 7.50            | 15.00 |
| 20    | 2*10P   | 11.25           | 18.75 |
| 24    | 2*12P   | 13.75           | 21.25 |
| 30    | 2*15P   | 17.50           | 25.00 |
| 40    | 2*20P   | 23.75           | 31.25 |
| 50    | 2*25P   | 30.00           | 37.50 |

- ①Soldering type: Blank-Dip S-SMT
- ②The numbe of pin:  
210-2\*SP.. 250-2\*2SP
- ③Material:L0-LCP
- ④Color: NA-Natural
- ⑤Plating:G-Gold Flash, G2-gold Flash 3U"  
G3-gold Flash 5U", G4-gold Flash 10U"  
G5-Gold Flash 15U"

[illegible]