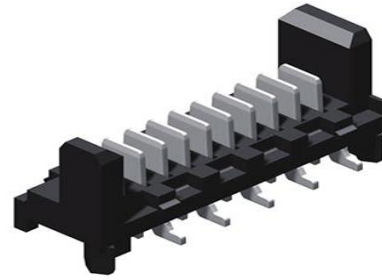
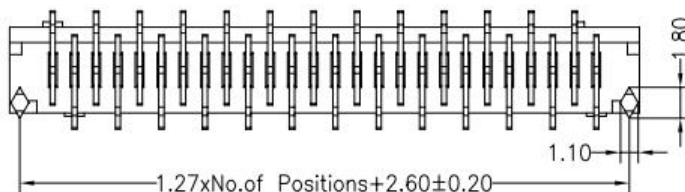

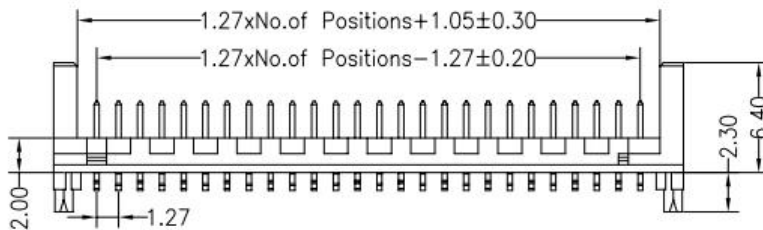
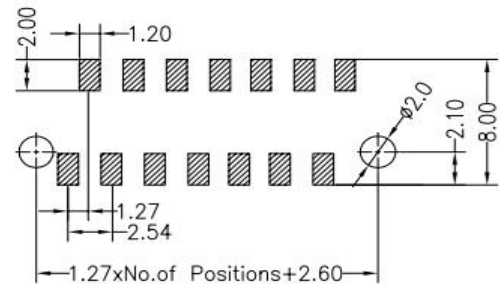


SPECIFICATIONS:

Rated Current	1.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Phosphor Bronze
Contact Plating	Tin Plated
Insulator Material	LCP -UL94V-0
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

HC Series	No.of Pin Per Row	Inner code	Type	Plating Code	Insulator Option	Post	Packing Code	End code
HC-PX-M	06P	M=Male	M=SMT	SN=Tin Plated	F=LCP	W= With Post	A=Tray	01
1.27mm Picoflex Header SMT	20P			SM=Matted Tin			T=Tube	