



SL15 SERIES

Slim voltage selector up to 12A 250VAC
single pole, snap-in or panel mounting, solder lug terminals

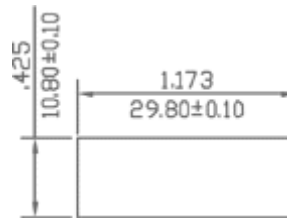




Mounting Hole of Snap-in Type

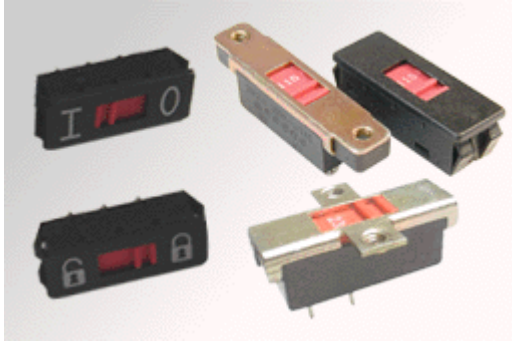

- | 12A 125/250VAC (UL, CSA)
- | 10(1)A 250V~μT85 (VDE, ENEC, CQC)
- | Contact resistance : 20m ohm (MAX).
- | Insulation resistance : 100M ohm (MIN), DC 500V
- | Dielectric strength : 1000VAC FOR 1 minute
- | Base : PBT or Phenolic, UL rated 94V-2 min
- | Frame : Steel
- | Actuator : PBT+15%G.F, UL rated 94V-2 min
- | Movable Contact : Silver plated Copper
- | Terminals : Silver plated Copper
- | Contact Spring : Spring steel

[How to order](#)

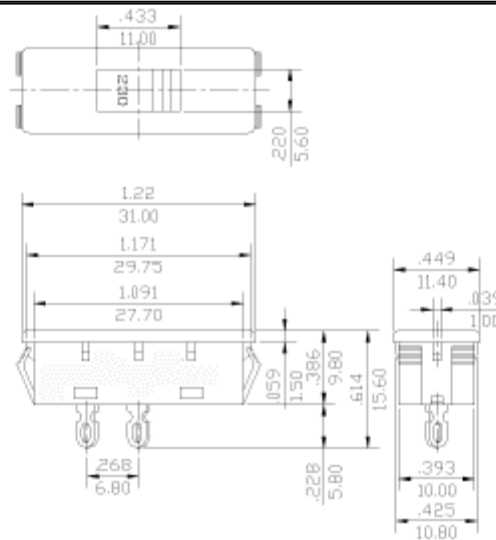

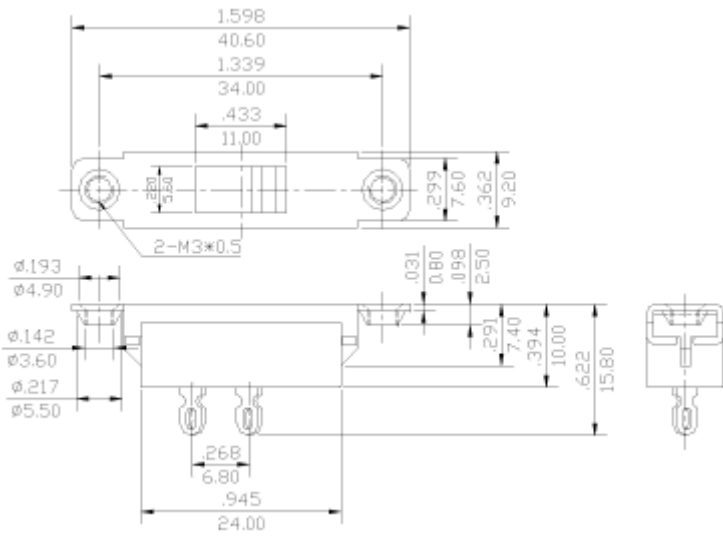

SL15-11(ASE)-11A

