
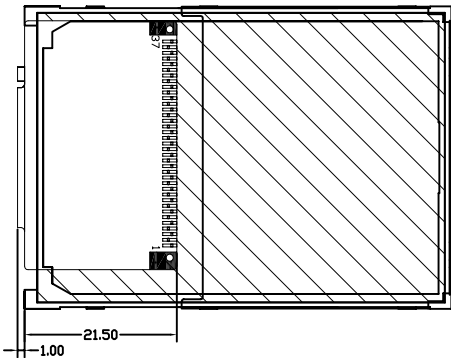
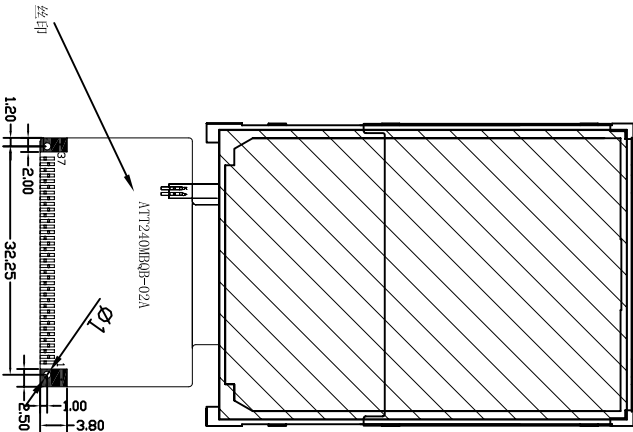


Customer Approved/Data:


Rev.	AMENDMENT	DATE
1.	背光色温由冷色变更成白色系	2019. 4. 19
2.	偏光片变更成上下厚砂片	2019. 4. 19
3.		

A

PIN ASSIGNMENT	
1	DB0
2	DB1
3	DB2
4	DB3
5	GND
6	IDVCC
7	/CS
8	RS
9	/WR
10	/RD
11	IM0
12	XL
13	YU
14	XR
15	YD
16	LED-A
17	LED-K1
18	LED-K2
19	LED-K3
20	LED-K4
21	IM3
22	DB4
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	/RESET
32	IDVCC
33	IDVCC
34	GND
35	DB5
36	DB6
37	DB7

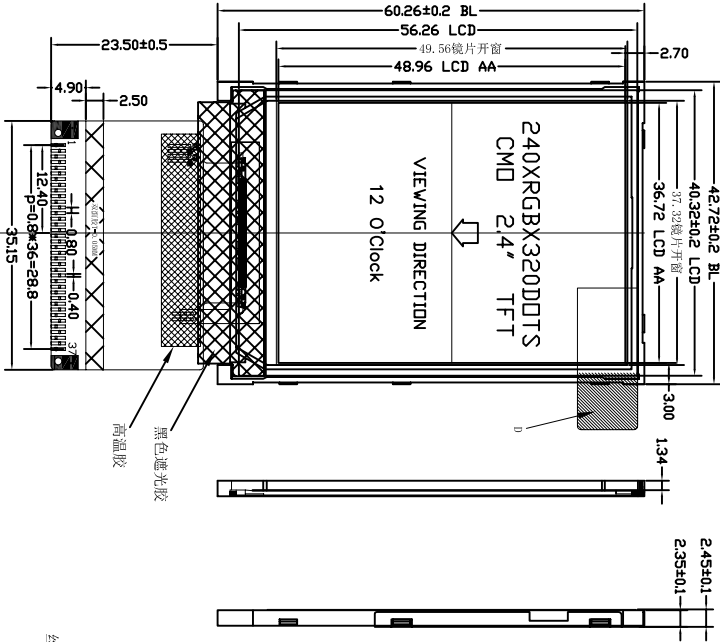

弯折参考图，展开出货



B/L CIRCUIT DIAGRAM

4 PCS WHITE LED:IF =80mA,VF=3.0V

MAIN LCD DESCRIPTION:

MAIN LCD DISPLAY TYPE	2.4" TFT
DISPLAY RESOLUTION	240XRGB X 320 Dots
VIEWING DIRECTION	12 O' CLOCK
CORRESPONDING IC	ST7789V2-A
LOGIC VOLTAGE	2.8 V(TYP)
OPERATION TEMPERATURE	-20°C to +70°C
STORAGE TEMPERATURE	-30°C to +80°C

NOTE :

1. < > : SPECIAL CHARACTERISTIC
2. + : SAFETY CHARACTERISTIC
3. * : CRITICAL DIMENSION
4. (...) : REFERENCE DIMENSION

D

D

DIMENSION		TOLERANCE	UNIT: mm	SCALE: NO SCALE	SIZE: A4
> 120		± 0.5	GENERAL	±0.2	
			TOLERANCE: Angle=1°		
			DESIGNED:	Date	FILE NO.
			CHECKED:	Date	ATT240MBOB-02A
			APPROVED:	Date	2.4LCM
				PART NO.	

ARROW-TECH ELECTRONICS CO.,LTD

SHEET: 1/1
REV: 0

