
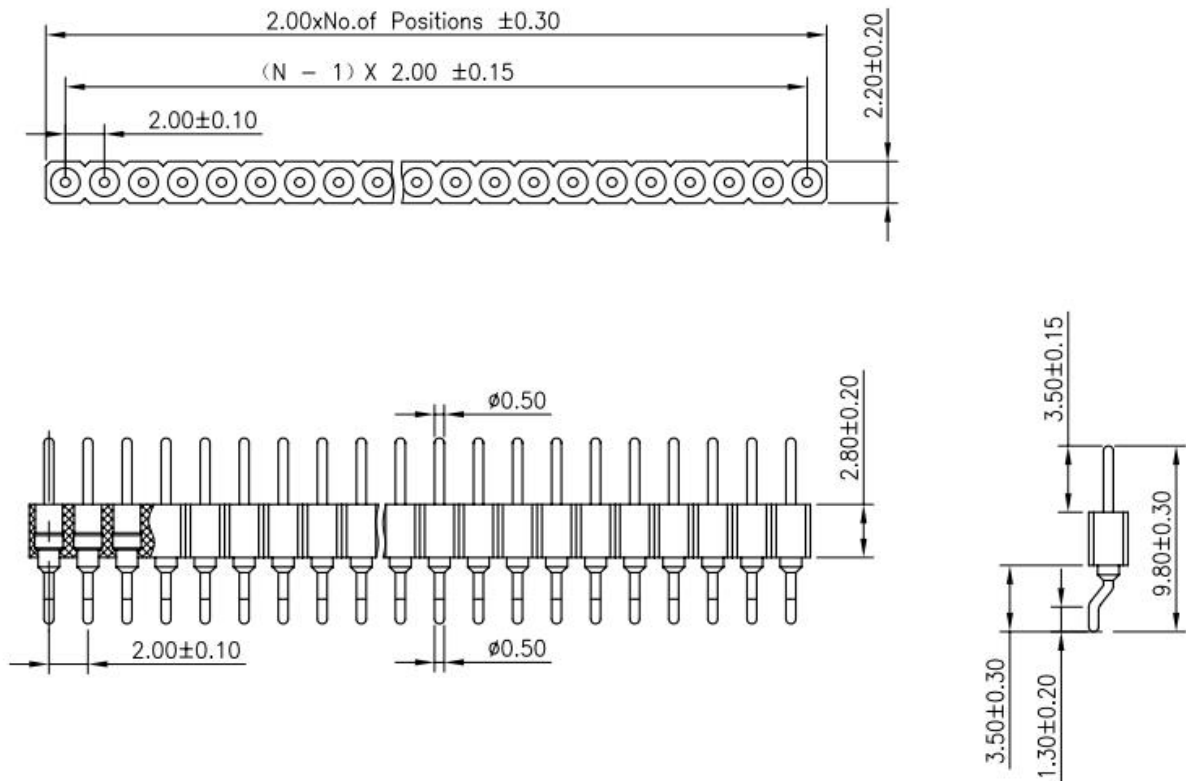


SPECIFICATIONS:

Rated Current	2.0AMP
Mechanical Life	500 Cycles MIN
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Connecting Pin :	Φ0.41mm
Contact Plating	Au or SN over Ni
Insulator Material	PPS-GF30-FR-UL94V-0

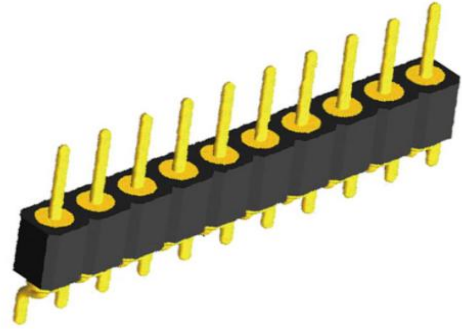

Ordering Information

HC Series	No.of Pin Per Row	Plating Code	Type	Insulator Option	PIN Length	Packing Code	End code
HC-MP528 2.0mm Machined Pin Header	1x02P	G0=Gold Flash	Z=R/A SMT	A=PBT	10mm	0=PE Bag	X
	1x40P	SN=Tin Plated		G=PPS		A=Tray	01
		SM=Matted Tin				T=Tube	02
		S0=Gold/Tin				P=Cap+Tube	
		G1=3u Gold				R=Cap+Reel	
		G2=5u Gold					
		G3=10u Gold					
		G4=15u Gold					
		G5=30u Gold					
		S1=3u Gold/Tin					