
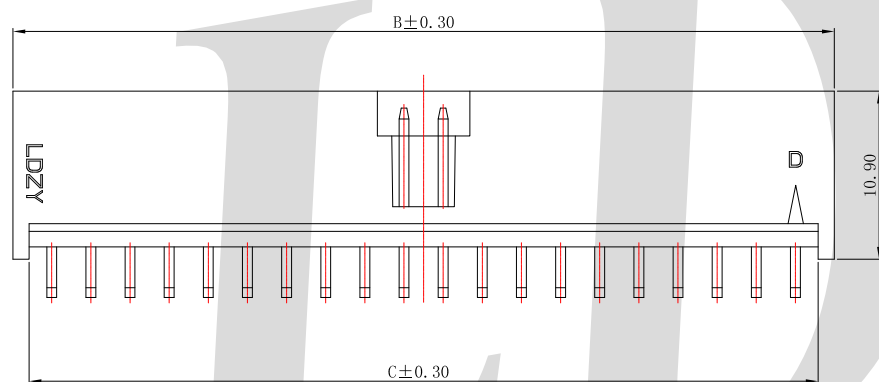
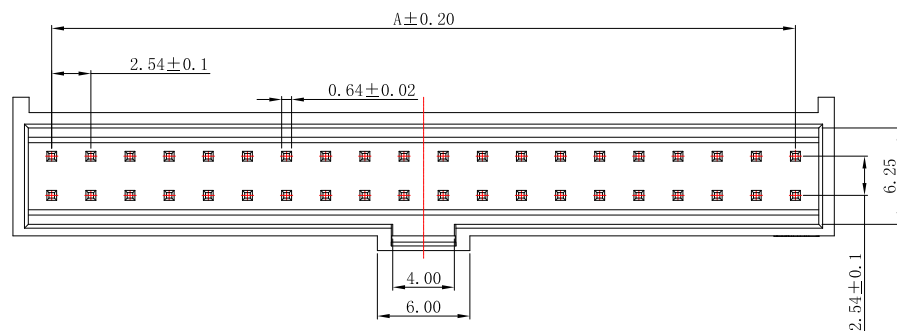


PCB LAYOUT



SPECIFICATIONS :

Voltage Rating: 250V AC / DC

Current Rating: 3A AC / DC

Withstanding Voltage: 1500V AC/minute

Temperature Range: -25°C~+85°C

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

*Suitable LDZY A2541 series Terminal

*Mates with LDZY A2541 series Housing

Material: PBT,UL94V-0

Color: Black

A2541 W R B - 2NP - P0 BK X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② Category: W-wafer

③ Welding Board Angle: R- Right Angle 90° ,

④ Colloid Feature: B-B Type

⑤ Circuit No.: 206-2*3PIN, 208-2*4PIN ...

⑥ Material: P0-PBT,UL94V-0;

⑦ Color: BK-Black,

⑧ Plating Method: G-Gold-flash,T-Tin-plated

Ordering Information & Dimensions

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*3P	5.08	10.12	8.02	2*21P	50.80	55.84	53.74
2*4P	7.62	12.66	10.56	2*22P	53.34	58.38	56.28
2*5P	10.16	15.20	13.10	2*23P	55.88	60.92	58.82
2*6P	12.70	17.74	15.64	2*24P	58.42	63.46	61.36
2*7P	15.24	20.28	18.18	2*25P	60.96	66.00	63.90
2*8P	17.78	22.82	20.72	2*26P	63.50	68.54	66.44
2*9P	20.32	25.36	23.26	2*27P	66.04	71.08	68.98
2*10P	22.86	27.90	25.80	2*28P	68.58	73.62	71.52
2*11P	25.40	30.44	28.34	2*29P	71.12	76.16	74.06
2*12P	27.94	32.98	30.88	2*30P	73.66	78.70	76.60
2*13P	30.48	35.52	33.42	2*31P	76.20	81.24	79.14
2*14P	33.02	38.06	35.96	2*32P	78.74	83.78	81.68
2*15P	35.56	40.60	38.50				
2*16P	38.10	43.14	41.05				
2*17P	40.64	45.68	43.58				
2*18P	43.18	48.22	46.12				
2*19P	45.72	50.76	48.66				
2*20P	48.26	53.30	51.20				

PIN针: 0.64*16.50
0.64*21.50

						一般公差 GENERAL TOLERANCE	 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A2541WRB-2NP-P0BKX			
						. X ±0.3	核准 APPD 审核 CHK 绘图 DR 日期 DATA				品名 TITLE			
						. XX ±0.2					2.54 Pitch 90° Dual Row wafe			
						. XXX ±0.1								
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	周立鸿	兰 雄	唐文舜	2017/04/17	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8802	版次 REV A