

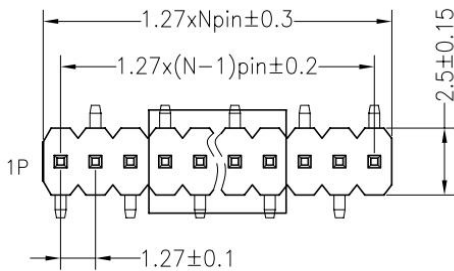


SPECIFICATIONS:




Rated Current	0.75AMP
Contact Resistance	30mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au over Ni
Insulator Material	PA6T
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

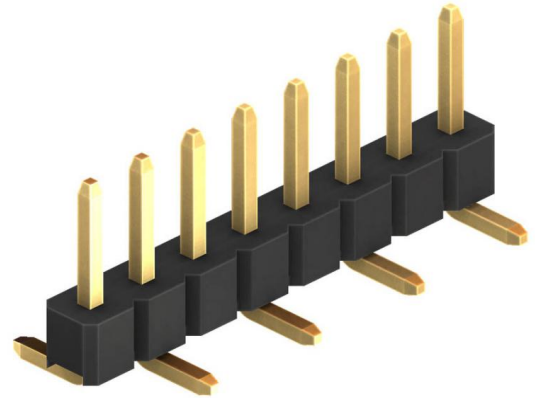


TYPE1

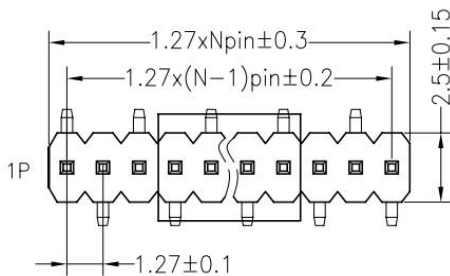

TYPE2

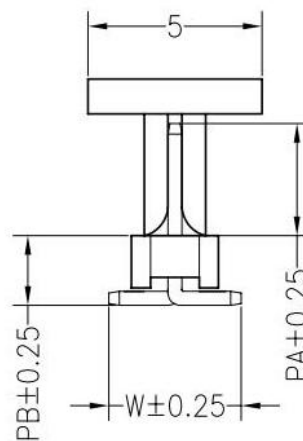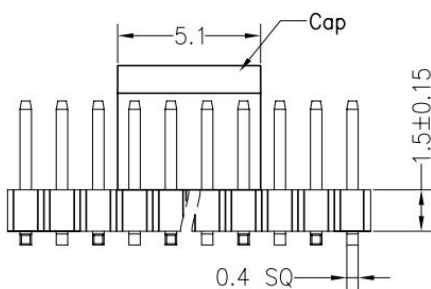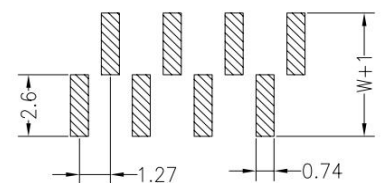
Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


TYPE1

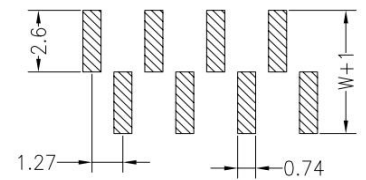

TYPE2

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	1.80	2.00	4.20	5.50
Alternate				

HC Series	No.of Pin Per Row	Insulator Option	N	Plating	Type	PIN Length	Packing	End code
HC-PH71511 1.27x1.5mm Pin Header	1x02P	A=PBT		G0=Gold Flash	M=SMT	XXX	0=PE Bag	X
	1x50P	B=PA66		SN=Tin Plated			A=Tray	
		C=PA6T		SM=Matted Tin			T=Tube	
		D=PA46		S0=Gold/Tin			P=Tube+Cap	
		E=PA9T		G1=3u Gold			R=Reel+Cap	
		F=LCP		G2=5u Gold			M=Reel+Mylar	
		X=Special		G3=10u Gold			X=Special	
				G4=15u Gold				
				G5=30u Gold				
				S1=3u Gold/Tin				