
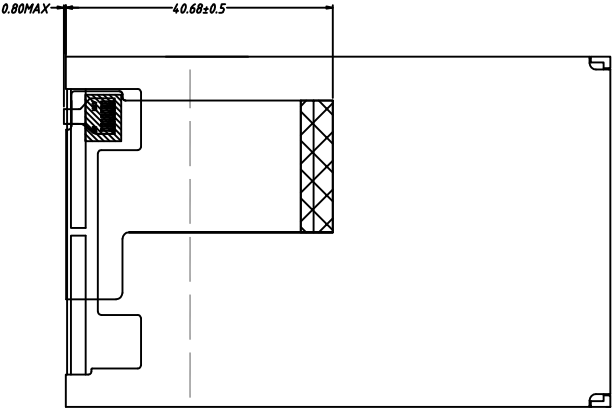
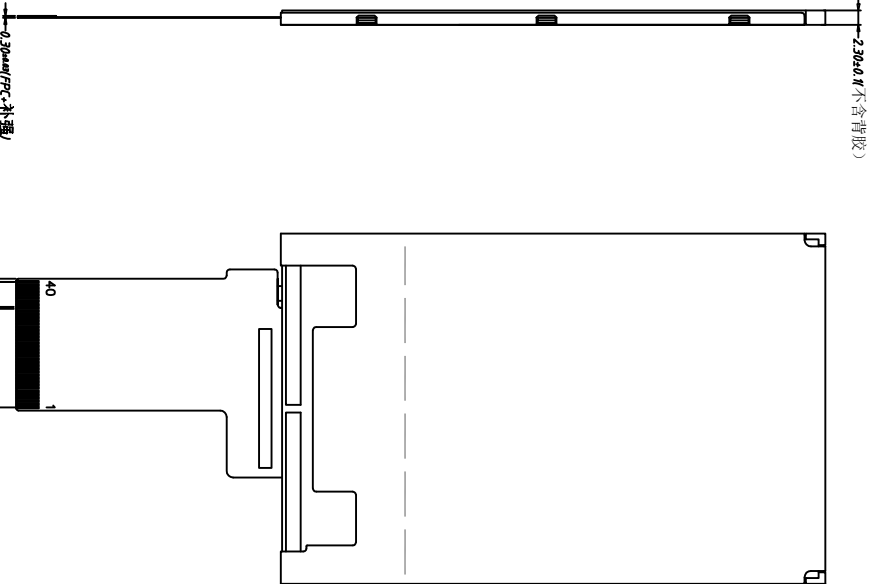


REV.	DATE	MODIFICATION
1.0	2021/02/27	First Issue

由 Autodesk 教育版产品制作

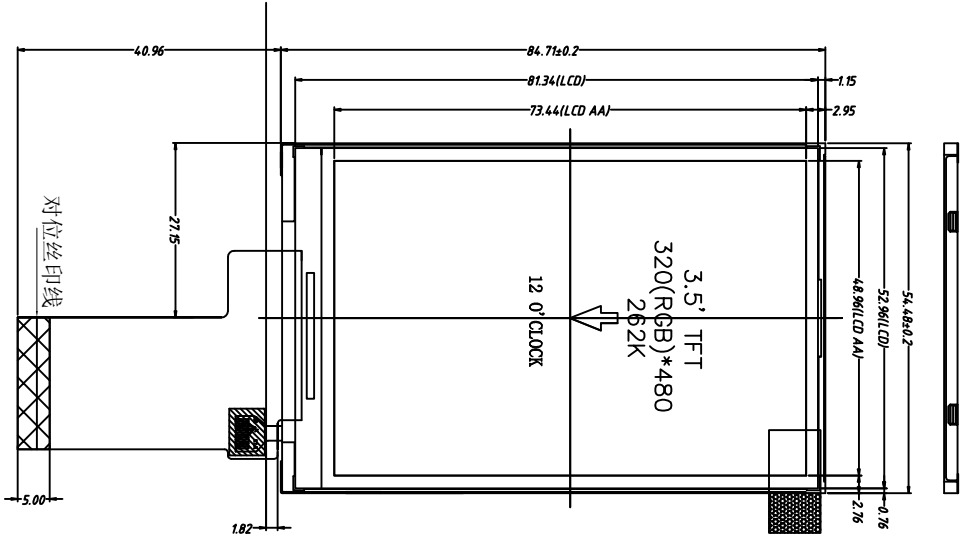


PN	DESC
1	VDD
2	VDD
3	GND
4	GND
5	GND
6	RESET
7	A1
8	K1
9	K1
10	CS1
11	SC1
12	NC
13	NC
14	SL
15	SDD
16	NC
17	NC
18	NC
19	DOTCK
20	VSNC
21	HSNC
22	ENABLE
23	NC
24	B0
25	B1
26	B2
27	B3
28	B4
29	G0
30	G1
31	G2
32	G3
33	G4
34	G5
35	NC
36	R0
37	R1
38	R2
39	R3
40	R4

Display Type:	TFT,65K COLOR
Viewing Angle:	NORMALLY WHITE
LCD Driver IC:	TRANSMISSIVE
Operating Voltage:	12.0 CLOCK
Operation Temperature:	IL19488
Storage Temperature:	VDD=2.8V
Interface:	-20°C TO 70°C
Backlight:	-30°C TO 60°C
	??
	WHITE(3.2V,120mA)

NOTES:

1. 符合ROHS要求;
2. 未标注公差: ±0.2;
3. *建议机壳开窗可视区域=LCD/AA+0.5mm;
4. *带TP产品, 建议机壳泡棉开窗=TP/VA+0.4mm;

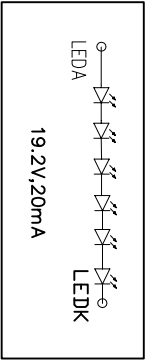

 东莞市中天朗科技有限公司					
INTERFACE	RGB Interface				
	FPC Connector	MODEL NAME	PART NO.		
VIEWING DIRECTION		TFT Display Module	ZT035WHV01		
		DWN	REV.	SHEET OF	
	12 O'clock	Rich Liang	1.0	1/1	
		CHKD	TOLERANCE UNLESS SPECIFIED		
Gray Scale DIRECTION		Rich Liang			
		PROJECTION	UNIT	SCALE	
	6 O'clock	300 ANGLE 	mm	1:1	

东莞市中天朗科技有限公司

由 Autodesk 教育版产品制作