

Fiber Optic Rack Mounted Patch Panels

Application

- Optic Access Network
- Local Area Network
- FTTH
- Telecommunication


Features

- 1U & 2U 19" Rack-mounted Sliding rail type
- Material: Cold rolled steel sheet
- Supplied with cable management & splice tray
- Front panel can be changeable as per the requirements
- Suitable for LC, SC, ST, FC ect adapters
- Max. Capacity: 1U 24 core & 2U can be upto 96 core
- Dimension: 450mm(W)*320mm(D)*1U(H)
450mm(W)*320mm(D)*2U(H)
- Color: Black & Grey optional
- Operating Temperature: - 25°C ~80°C
- Relative Humidity: - 25°C ~80°C
- Air pressure: 70Kpa ~ 106Kpa


Accessories

- Splice Trays
- 48pcs Heat Sleeves
- Cable Gland
- Cable Tie
- Number Labels
- Installation Screws

Replaceable Front Panels

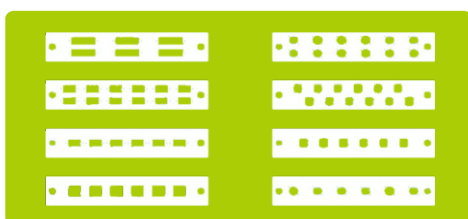

Sliding Rail Patch Panel

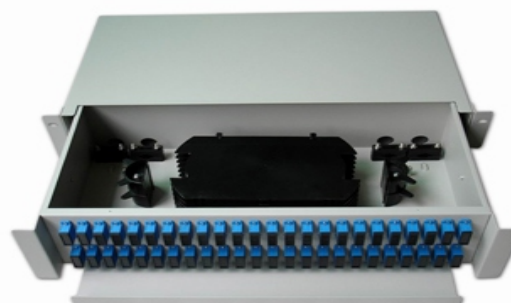

P/N: GL-SPP01-xxxxxx

Ordering Information

P/N Code : GL-SPP01-12FCS01 For 1U Patch panel, 12 port FC SM Simplex

P/N	Product		Loaded Adapter				Adapter Type				Dimension(mm)
GL-	SPP01	Patch Panel	2	2 Empty Hole			Unloaded				450*320*1U
			12	12 Port	FC	FC/PC	S	SM	01	Simplex	450*320*1U
			24	24 Port	FCA	FC/APC	M	MM	02	Duplex	450*320*1U
			48	48 Port	SC	SC/PC	53	OM3			450*320*1U
			96	96 Port	SCA	SC/APC					450*320*2U
					LC	LC/PC					
					LCA	LC/APC					
					ST	ST/PC					