
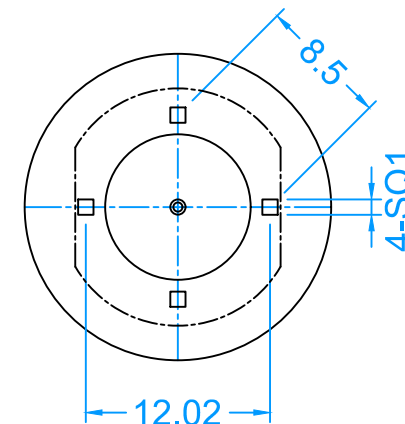
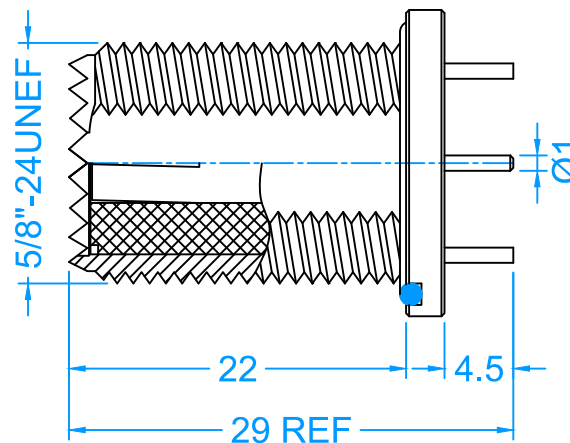
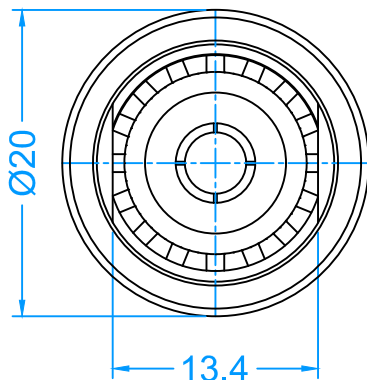
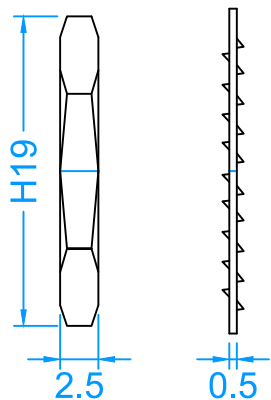


RECOMMENDED
PANEL CUTOUT



RECOMMENDED
PCB LAYOUT

Meets IEC60169-12, GB/T 15888. Precision
Machined and High Quality Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC~300MHz
Working Voltage	750V r.m.s
Withstanding Voltage	2000V r.m.s
Center Contact Resistance	≤5mΩ
Outer Contact Resistance	≤5mΩ
Insulation Resistance	≥5000MΩ
Durability	≥500 cycles
Temperature Range	-55°C to 155°C

6	Nut	1	Brass	Nickel
5	Washer	1	Brass	Nickel
4	Gasket	3	Silicone	
3	Socket	1	Phos. Bronze	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	White Bronze
No.	Description	QTY	Material	Finish

RoHS
Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
Kevin

DRAWN DATE
06 Mar. 2017

KeMy Electronic Technology Inc.

TITLE
IP67 UHF (F) Straight Jack, SO239,
Bulkhead, Waterproof, PCB Mount

DRAWING NO. KM-011307

REV
0

All rights reserved. www.dgkemy.com