



Category

- SWITCH
 - ANTI-VANDAL SW
 - ROCKER SW
 - PUSH SW
 - TOGGLE SW
 - MICRO/DETECTOR SW
 - SLIDE SW
 - ROTARY SW
 - DIP SW
 - TACT SW
 - KEYLOCK SW
 - CAPACITANCE SW
 - SAFETY & CONTROL SW
 - VEHICLE SW
 - THERMOSTAT SW
 - BATTERY SW
 - TRIGGER SW

- SOCKET
- INDICATOR
- SENSOR
- ELECTRO-MODULE
- BREAKER
- FUSE HOLDER
- FUSE
- ENCODER
- POTENTIOMETER
- CONNECTOR
- WIRE HARNESS
- BUZZER
- NEW PRODUCT

Products Search



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [RS33](#) ▶ [RS33](#)

SWITCH / ROTARY SW

RS33
33mm Rotary Switch with Multi-Position to Control Different Circuit Functions

Up to 30 positions
P.C.B. mounting terminal
Non-shorting contact

[PDF Download](#)

[Get Information](#)

[Print this page](#)




[ZOOM IN](#)


Feature

- Rating: 5mA 5VDC
- Changeover timing: Non-shorting contact
- Contact Resistance: 50mΩ Max.
- Insulation resistance: 100MΩ at DC 100V
- Dielectric strength: 300VAC for 1 minute
- Rotation life: 10,000 cycles
- Operating temperature: -20°C~+85°C
- Changeover angle: 10°
- Rotation torque: 0.3±0.15kgf.cm
- Pull-Push strength: 1 kgf.cm
- Rotational stop-end torque: 0.5 kgf.cm
- Soldering heat with manual: 300±10°C Max. 3s
- Soldering heat with dip: 260±5°C Max. 3s
- Contact positions: 30

Specification

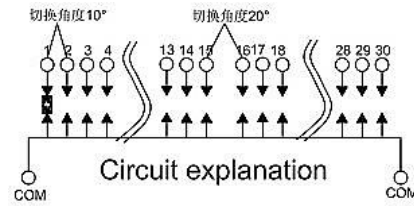

Item

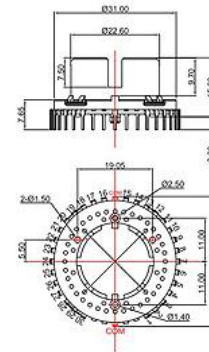

 BACK



Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved