





Specification

Model:	DC4010	Size:	40 X 40 X10MM	Picture 
Material:				
Frame:	Plastic(UL94V-0)			
Impeller:	Plastic(UL94V-0)			
Lead Wire:	UL1007AWG#26 or Equivalent (+)Red,(-)Black			
Expected Life				
Ball Bearing	70,000hrs(40℃)			
Sleeve Bearing	30,000hrs(40℃)			
Temperature Range				
Operating Temperature	-10℃ ~70℃(Non-condensing)			
Storage Temperature	-40℃ ~70℃(Non-condensing)			
Safety Standards				
UL,CE,ROHS				
DC Fan Specials				
RD,FG,IP56				

Dimensions(Unit:mm)

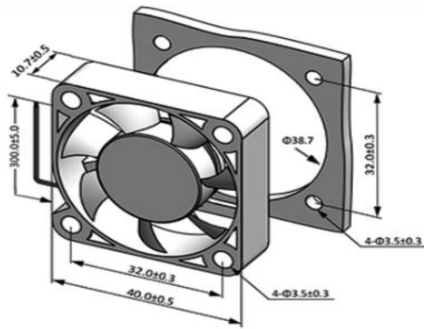

Dimensions(Unit:mm)

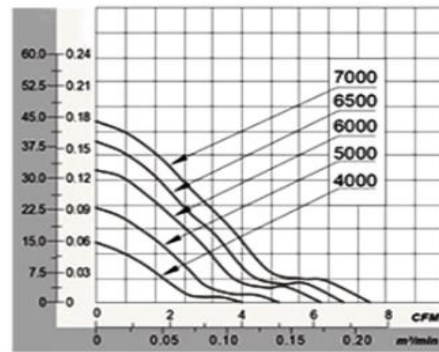

Parameter

Model	Rev	Bearing	Rated	Operating	Input	Input	Speed	Max Air Flow		Max		Noise	Weight
		Type	Voltage	Voltage	Current	Power				Static Pressure			
Part No.	A	B	VDC	VDC	A	W	RPM	CFM	m ² /min	Inch-H2O	Pa	dB-A	g
XFS4010#05	F02	B.S	5	3.5~5.5	0.22	1.10	7000	7.41	0.21	0.18	43.91	34.8	16.0
XFS4010#05	F02	B.S	5	3.5~5.5	0.18	0.90	6500	6.84	0.19	0.16	38.64	32.7	16.0
XFS4010#05	F02	B.S	5	3.5~5.5	0.14	0.70	6000	6.2	0.18	0.13	31.84	30.5	16.0
XFS4010#05	F02	B.S	5	3.5~5.5	0.1	0.50	5000	5.07	0.14	0.09	22.65	25.7	16.0
XFS4010#05	F02	B.S	5	3.5~5.5	0.08	0.40	4000	4.02	0.11	0.06	14.68	22.3	16.0
XFS4010#12	F02	B.S	12	7.0~13.8	0.15	1.80	7000	7.41	0.21	0.18	43.91	34.8	16.0
XFS4010#12	F02	B.S	12	7.0~13.8	0.1	1.20	6500	6.84	0.19	0.16	38.64	32.7	16.0
XFS4010#12	F02	B.S	12	7.0~13.8	0.08	0.96	6000	6.2	0.18	0.13	31.84	30.5	16.0
XFS4010#12	F02	B.S	12	7.0~13.8	0.06	0.72	5000	5.07	0.14	0.09	22.65	25.7	16.0
XFS4010#12	F02	B.S	12	7.0~13.8	0.04	0.48	4000	4.02	0.11	0.06	14.68	22.3	16.0
XFS4010#24	F02	B.S	24	14.0~27.6	0.07	1.68	7000	7.41	0.21	0.18	43.91	34.8	16.0
XFS4010#24	F02	B.S	24	14.0~27.6	0.06	1.44	6500	6.84	0.19	0.16	38.64	32.7	16.0
XFS4010#24	F02	B.S	24	14.0~27.6	0.05	1.20	6000	6.2	0.18	0.13	31.84	30.5	16.0
XFS4010#24	F02	B.S	24	14.0~27.6	0.04	0.96	5000	5.07	0.14	0.09	22.65	25.7	16.0