



威固电子户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION



户内小间距 P1.25 表贴三合一

INDOOR SMALL SPACING P1.25 SMD 3IN1 PRODUCT SPECIFICATION

产品规格书

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION


技术参数

TECHNICAL PARAMETERS

模组 Unit Module	项目	Item	参数	Parameter
	产品型号	Model Number	VG-P1.25-30scan	
	模组尺寸	Module Size	150mm*168.75mm	
	物理点间距	Physical Pitch	1.25mm	
	物理密度	Physical Density	640000 dots/m2	
	发光点颜色	Pixel Configuration	1R1G1B	
	LED 封装	Package Mode	SMD 3IN1-1010	
	模组分辨率	Module Resolution	120dots(W)*135dots(H)	
	模组最大功耗	Max Power Consumption	12W	
	模组厚度	Module Thickness	1.8mm	
	模组重量	Module Weight	250g	
	驱动方式	Drive Type	恒流驱动 Constant Drive	
	扫描方式	Scan Mode	1/30 扫描 1/30scan	
	接口方式	Port Type	自定义 Customize	
	匹配箱体尺寸	Match Cabinet Size	W600mm*H337.5mm	


户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

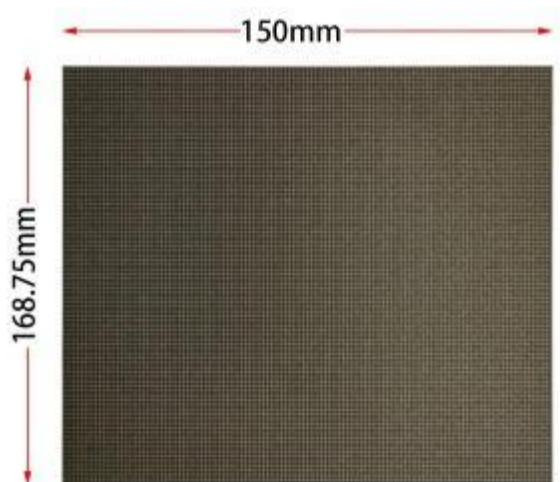

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

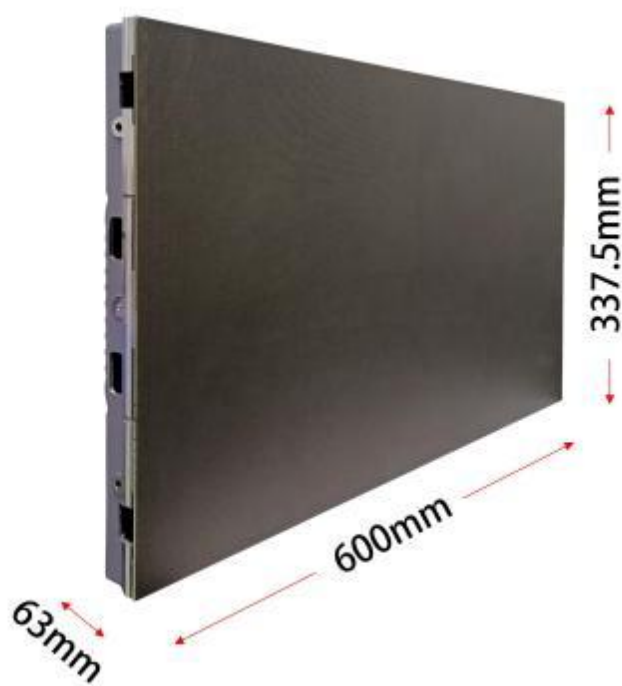

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

显示屏参数 Display Parameters	最佳视角 Best Viewing Angle	H:140° ;V:120°
	视距 Recommended Viewing Distance	≥1.2m
	驱动 IC Driving IC	北方集创 ICN2163
	画面刷新率 Refresh Rate	3840Hz
	白平衡亮度 Brightness of White Balance	700cd/m²
	输入电压 Input Voltage	110-220V;AC±10%
	工作温度/湿度 Operating Temperature/Humidity	-20°C ~+50°C
	平均功耗 Average Power Consumption	120w/m²
	最大功耗 Max. Power Consumption	500w/m²
	寿命 Life Time	>100000 hours
	坏灯率 Bad Light Rate	<0.0001
	平均无故障时间 MTBF	>5000 hours

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

案例分享

CASE SHARING

