




WIN-KARE TECHNOLOGY CO.,LTD



- 1、All dimensions in mm [Inch]
- 2、General tolerance : $>10\pm 0.4$
 $<10\pm 0.25$
- 3、Electrical rating : 10A 125~250VAC
- 4、Contact resistance : $<20\text{m}\Omega$ (initial)
- 5、Insulation resistance : $>1000\text{M}\Omega$ (500DC between open contacts)
- 6、Dielectric strength : $>1500\text{V}$ 1 minute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)

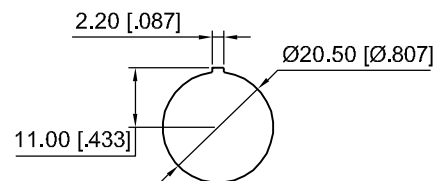

CIRCUIT SPST



Panel cut out thickness:0.8~3mm
(0.031"~0.118")

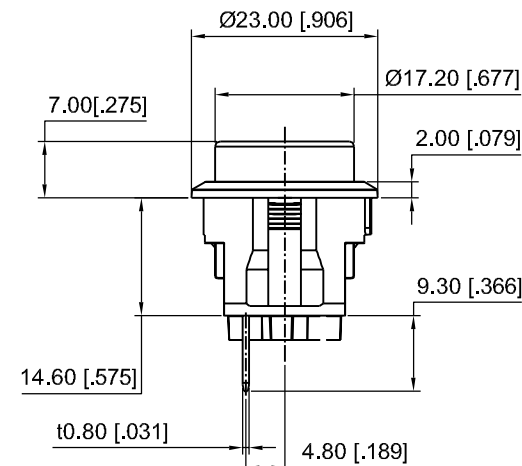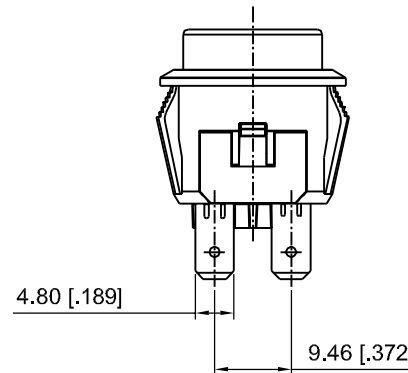

Color	Housing	Actuator
K(Black)		
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		

* We keep the right to alter the dimension without notice.

Part No.	LC21010 ET0F	WIN-KARE TECHNOLOGY CO.,LTD			
Dwg. NO.	LC210-5921				
Series NO.	LC210	Drawing	Zhangxilian	Auditing	Wangchangjian
Dwg Name	Specification	Scale	1.5:1	Date	09/21/05
					Page

Tel:+86-755-2503073;Fax:+86-755-25003079

Http:\\www.win-kare.com; Mail:service@win-kare.com