
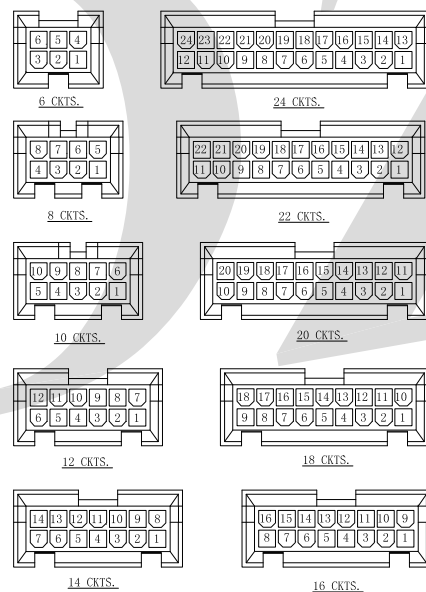




**Voltage Rating:** 600V AC / DC  
**Current Rating:** 9A AC / DC  
**Withstanding Voltage:** 1500V AC/minute  
**Temperature Range:** -25°C~+85°C  
**Insulation Resistance:** 1000MΩ Min.  
**Contact Resistance:** 10mΩ Max.  
**After environmental testing:** 20mΩ Max.

Wafer: Nylon 66,UL94V-0 or Nylon 66,UL94V-2  
Color: Natural or Black or White  
Conductor: Brass/Tin-Plated;

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V-Straight 180° R-Vertical 90°
- ④ Colloid Feature: V-"V" type opening,
- ⑤ Conductor Type: Blank-Common; K-Hollow Needle
- ⑥ Soldering Type: Blank-DIP Type;
- ⑦ Circuit No.: 206-2X3PIN,208-2X4PIN,...
- ⑧ Material: N0-Nylon66,UL94V-0 ,N2-Nylon66,UL94V-2
- ⑨ Color: NA-Natural,BK-Black,WH-White,
- ⑩ Plating Method: T-Tin-plated, G-Gold-flash
- ⑪ Option: Blank-Standard type

| Poles | Dimensions(mm) |       |
|-------|----------------|-------|
|       | A              | B     |
| 2x02P | 4.20           | 8.40  |
| 2x03P | 8.40           | 19.20 |
| 2x04P | 12.60          | 23.40 |
| 2x05P | 16.80          | 27.60 |
| 2x06P | 21.00          | 31.80 |
| 2x07P | 25.20          | 36.00 |
| 2x08P | 29.40          | 40.20 |
| 2x09P | 33.60          | 44.40 |
| 2x10P | 37.80          | 48.60 |
| 2x11P | 42.00          | 52.80 |
| 2x12P | 46.20          | 57.00 |

|         |                |                |                  |        |         |                                                                                                                                                                                                                                                                   |        |     |     |                                          |               |                 |                         |             |
|---------|----------------|----------------|------------------|--------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|-----|------------------------------------------|---------------|-----------------|-------------------------|-------------|
|         |                |                |                  |        |         | <div><div><div>一般公差<br/>GENERAL TOLERANCE</div><div><div>. X     ±0. 3</div><div>. XX    ±0. 2</div><div>. XXX   ±0. 1</div></div></div><div><div><div>LDZY®<br/>Electronics</div><div>东莞市蓝雁电子有限公司<br/>DongGuan LDZY Electronics CO.,LTD.</div></div></div></div> |        |     |     | 料号 PART NO<br>C4255WRV-2NP-XXXXT         |               |                 |                         |             |
|         |                |                |                  |        |         | <div><div>核准 APPD</div><div>审核 CHK</div><div>绘图 DR</div><div>日期 DATA</div></div>                                                                                                                                                                                  |        |     |     | 品名 TITLE<br>4.2mm Crimp Style connectors |               |                 |                         |             |
| 日期 DATE | 旧版次<br>OLD REV | 新版次<br>NEW REV | 变更内容 DESCRIPTION | 审核 CHK | 核准 APPD | 角法<br>PROJECT<br>                                                                                                                                                            | Rodney | 兰 雄 | Lce | 2015/03/11                               | 单位 UNIT<br>MM | 比例 SCALE<br>1/1 | 图号 NUMBER<br>LDZY-S1001 | 版次 REV<br>A |