

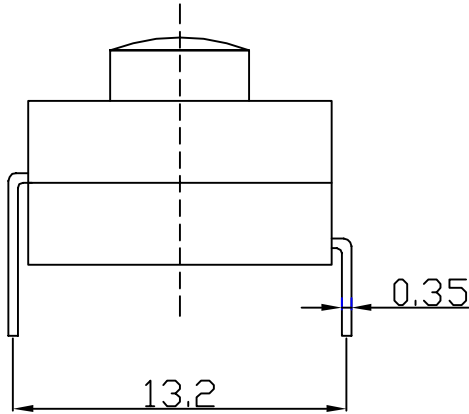
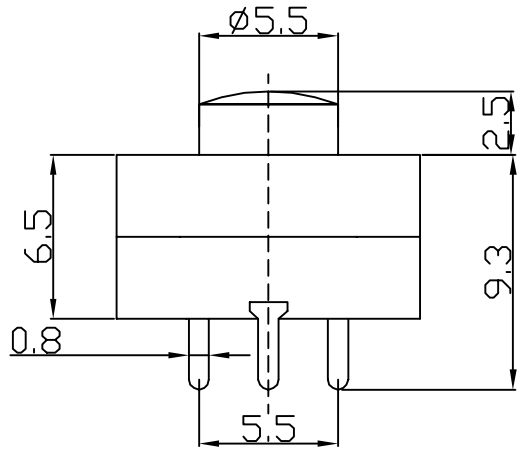



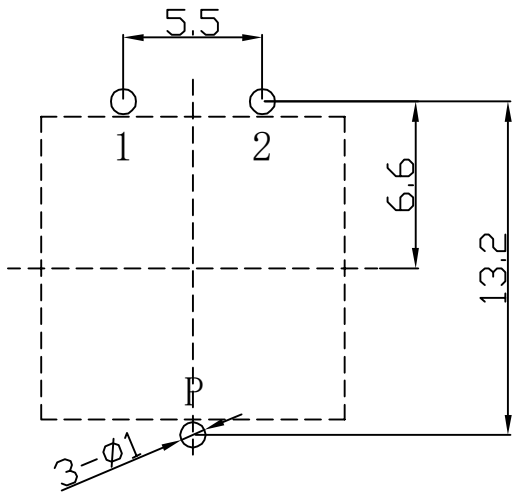

- Key Specification:
- 1. Rating:
DC 30V 0.5A
 - 2. Contact Resistance:
≤100mΩ(Max)
 - 3. Insulation Resistance:
≥DC 500V 100MΩ(Min)
 - 4. Withstand Voltage:
AC 500V for 1min
 - 5. Operating Force:
750g±50g
 - 6. Operating Life:
≥100,00Cycles

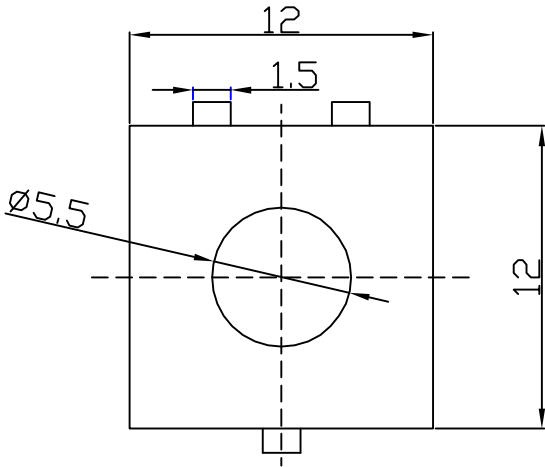

8					TOLERANCE UNLESS SPECIFIED				
7	SPRING	SUS	1	NATURE					
6	CONTACT	HR65 BRASS Y=0.25	2	Ag PLATED	WITHIN 1.5: ±0.1mm				
5	TERMINAL	HR62 BRASS Y=0.38	3	Ag PLATED	OVER 1.5: ±0.2mm				
4	DOWN GEAR	POM	1	BLACK	ANGLES: ±2°	ISSUE	DATE	DESCRIPTIONS	APPD.
3	UPER GEAR	POM	1	BLACK	TITLE:PUSH BUTTON SWITCH	SCALE:4:1	UNIT:mm	DRWG. NO.:	
2	COVER	POM	1	BLACK	MODEL NO: JBL6-1301	FUNCTION:ON-OFF	DWN		
1	CASE	POM	1	BLACK			CHK'D		
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD		APPD.		