


# UL2464

# BORT cable

RoHS & REACH compliant

环保引领未来

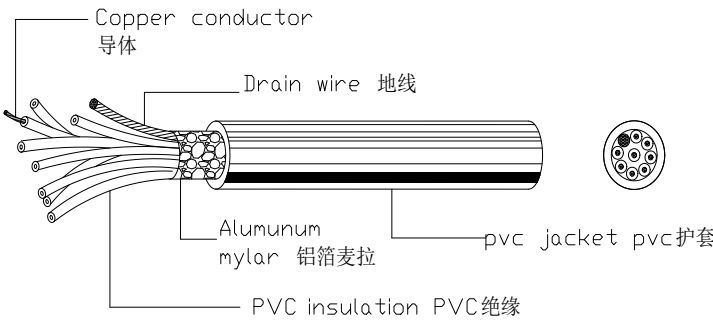

## PRODUCT DESCRIPTION

- ★ Rated temperature: 80°C
- ★ Rated voltage: 300V
- ★ According to: UL Subject 758, UL1581, C22.2
- ★ Solid or stranded, tinned or bare copper conductor
- ★ PVC insulation
- ★ Cores cabled under AL-MYLAR shield
- ★ Tinned or bare stranded copper drain wire
- ★ Tinned or bare stranded copper wire overall more than 80% coverage braided shield
- ★ PVC jacket
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ Sound broadcast, audio, instrumentation & computer

## 产品说明

- ★ 额定温度: 80°C
- ★ 额定电压: 300V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合镀锡或裸铜丝
- ★ 聚氯乙烯绝缘
- ★ 芯线集合后铝箔麦拉屏蔽
- ★ 镀锡或裸铜丝绞合地线
- ★ 镀锡或裸铜丝编织, 80%以上遮蔽率
- ★ 聚氯乙烯护套
- ★ 通过UL VW-1以及CSA FT1垂直燃烧测试
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于广播, 视听设备, 计算机线等

| Conductor     |            | Finished product |              |               |                |
|---------------|------------|------------------|--------------|---------------|----------------|
| AWG/NO.OFCOND | NO.of Cond | Insulated Thick. | Braid shield | Jacket Thick. | Outside Thick. |
|               | No./mm     |                  |              |               |                |
| 24×2C         | 11/0.16    | 0.25             | 16/4/0.10    | 0.80          | 4.35           |
| 24×3C         | 11/0.16    | 0.25             | 16/4/0.10    | 0.80          | 4.50           |
| 24×4C         | 11/0.16    | 0.25             | 16/5/0.10    | 0.80          | 4.80           |
| 24×5C         | 11/0.16    | 0.25             | 16/6/0.10    | 0.80          | 5.10           |
| 24×6C         | 11/0.16    | 0.25             | 16/6/0.10    | 0.80          | 5.45           |
| 24×7C         | 11/0.16    | 0.25             | 16/6/0.10    | 0.80          | 5.50           |
| 22×2C         | 17/0.16    | 0.25             | 16/5/0.10    | 0.80          | 4.75           |
| 22×3C         | 17/0.16    | 0.25             | 16/6/0.10    | 0.80          | 4.95           |
| 22×4C         | 17/0.16    | 0.25             | 16/6/0.10    | 0.80          | 5.30           |
| 22×5C         | 17/0.16    | 0.25             | 16/7/0.10    | 0.80          | 5.65           |
| 22×6C         | 17/0.16    | 0.25             | 16/8/0.10    | 0.80          | 6.05           |
| 22×7C         | 17/0.16    | 0.25             | 16/8/0.10    | 0.80          | 6.10           |

博尔特（漳州）电缆有限公司