



LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	1

CUSTOMER:

P/N: JHD802C

CUSTOMER APPROVAL

CHECKED	CHECKED	APPROVAL

SUPPLIER APPROVAL


CHECKED	CHECKED	APPROVAL

Tel: 0755-83779545

Fax: 0755-83779544

Address: Room A512, Baohua Office Building, Huaqiang North
Road, Futian, Shenzhen 518031, P. R. China

E-mail: jhd2@baohua.com.cn

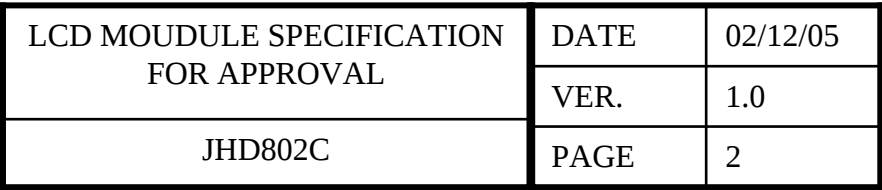[illegible]



LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	3

CONTENTS

1.	FEATURES	4
2.	MECHANICAL SPEC	4
3.	ABSOLUTE MAXIMUM RATING	5
4.	ELECTRICAL CHARACTERISTICS	5
5.	ELECTRO-OPTICAL CHARACTERISTICS	6
6.	QC/QA PROCEDURE	7
7.	RELIABILITY	8
8.	BLOCK DIAGRAM	9
9.	POWER SUPPLY	9
10.	TIMIING DIAGRAM	10
11.	AC CHARACTERISTICS.....	11
12.	INSTRUCTION SET	12
13.	INITIALIZATION SEQUENCE	13
14.	FONT TABLE.....	14
15.	HANDLING PRECAUTION.....	15
16.	EXTERNAL DIMENSION	18
17.	INTERFACE	19



LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	4

1. FEATURES

- Display construction..... 8 Characters * 2 Lines
- Display mode..... TN/STN
- Display type..... Positive Transflective
- Backlight..... LED/5.0V
- Viewing direction..... 6 o' clock
- Operating temperature..... Indoor
- Driving voltage..... Single power
- Driving method..... 1/16 duty, 1/5 bias
- Type..... COB (Chip On Board)
- Number of data line..... 8-bit parallel
- Connector..... Pin

2. MECHANICAL DATA

ITEM		WIDTH	HEIGHT	THICKNESS	UNIT
Module size		58.0	32.0	13.4(MAX)	mm
Viewing area		38.2	16.5	—	mm
character	Construction	5*8			dots
	Size	2.96	5.56	—	mm
	Pitch	3.55	5.94	—	mm
Dot	Size	0.56	0.66	—	mm
	Pitch	0.60	0.70	—	mm
Diameter of mounting hole		2.50			mm
Weight		About 50			g

3. ABSOLUTE MAXIMUM RATINGS

Characteristics	Symbol	Ratings
Operating Voltage	VDD	-0.3V to +7.0V
Driver Supply Voltage	V _{LCD}	VDD-12V to VDD+0.3V
Input Voltage Range	V _{IN}	-0.3V to VDD + 0.3V
Operating Temperature	T _A	0 °C to +60 °C
Storage Temperature	T _{STO}	-55 °C to +125 °C

4. ELECTRICAL CHARACTERISTICS

(TA = 25 , VDD = 2.7 to 4.5V)


Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Operating Current	I _{DD}	-	0.2	0.4	mA	External clock (Note)
Input High Voltage	V _{IH1}	0.7VDD	-	VDD	V	Pins:(E, RS, R/W, DB7 - 0)
Input Low Voltage	V _{IL1}	-0.3	-	0.55	V	
Input High Voltage	V _{IH2}	0.7VDD	-	VDD	V	Pin OSC1
Input Low Voltage	V _{IL2}	-0.2	-	0.2VDD	V	
Input High Current	I _{IH}	-1.0	-	1.0	μA	Pins: (RS, R/W, DB7 - 0)
Input Low Current	I _{IL}	-5.0	-15	-30	μA	VDD = 3.0V
Output High Voltage (TTL)	V _{OH1}	0.75VDD	-	-	V	I _{OH} = - 0.1mA Pins: DB7 - 0
Output Low Voltage (TTL)	V _{OL1}	-	-	0.2VDD	V	I _{OL} = 0.1mA Pins: DB7 - 0
Output High Voltage (CMOS)	V _{OH2}	0.8VDD	-	-	V	I _{OH} = - 40μA, Pins: CL1, CL2, M, D
Output Low Voltage (CMOS)	V _{OL2}	-	-	0.2VDD	V	I _{OL} = 40μA, Pins: CL1, CL2, M, D
Driver ON Resistance (COM)	R _{COM}	-	-	20	KΩ	I _O = ±50μA, V _{LCD} = 4V Pins: COM16 - 1
Driver ON Resistance (SEG)	R _{SEG}	-	-	30	KΩ	I _O = ±50μA, V _{LCD} = 4V Pins: SEG40 - 1
LCD Voltage	V _{LCD}	3.0	-	11.0	V	VDD-V5, 1/4 bias or 1/5 bias

5. ELECTRO-OPTICAL CHARACTERISTICS


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Contrast ratio	K	$\phi = 0$	1.4	4	—	—	1
Response time	Tr	$\phi = 1$	—	130	—	ms	2
(rise) Response time	Tf	$\phi = 2$		130	—	ms	2
(fall) Viewing angle	ϕ	$K \geq 1.4$	10 -- +30			deg.	3
	θ		-30 -- +30				

Note 1: Definition of Contrast Ratio "K"


$$K = \frac{\text{Brightness of non-selected segment(A)}}{\text{Brightness of selected segment(B)}}$$

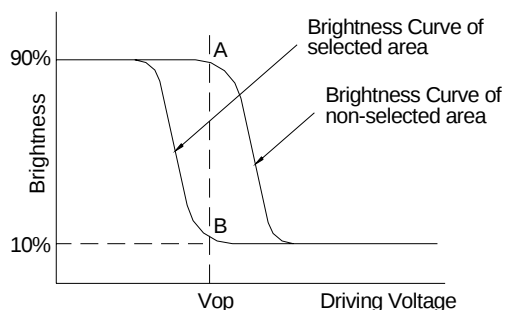

Note 2: Definition of Optical Response Time

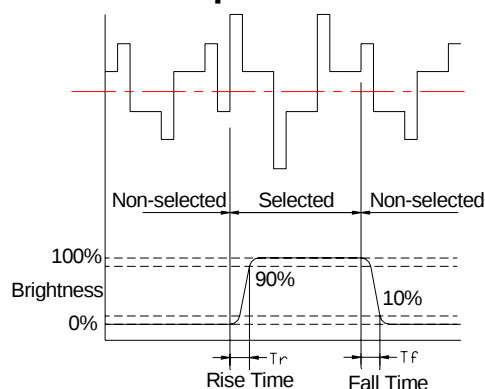


Note 3: Definition of Viewing Angle

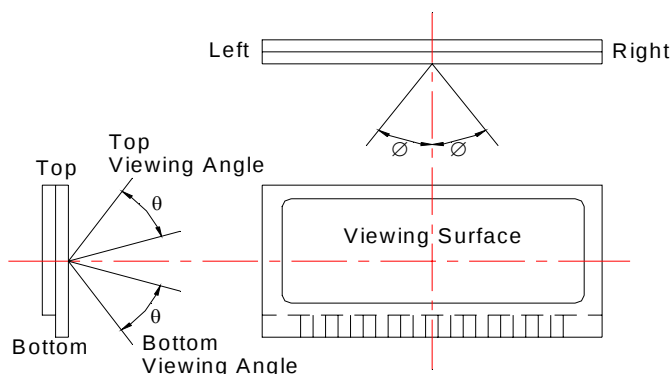

Please select either top or bottom viewing angle

LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	7

6. QC/QA PROCEDURE

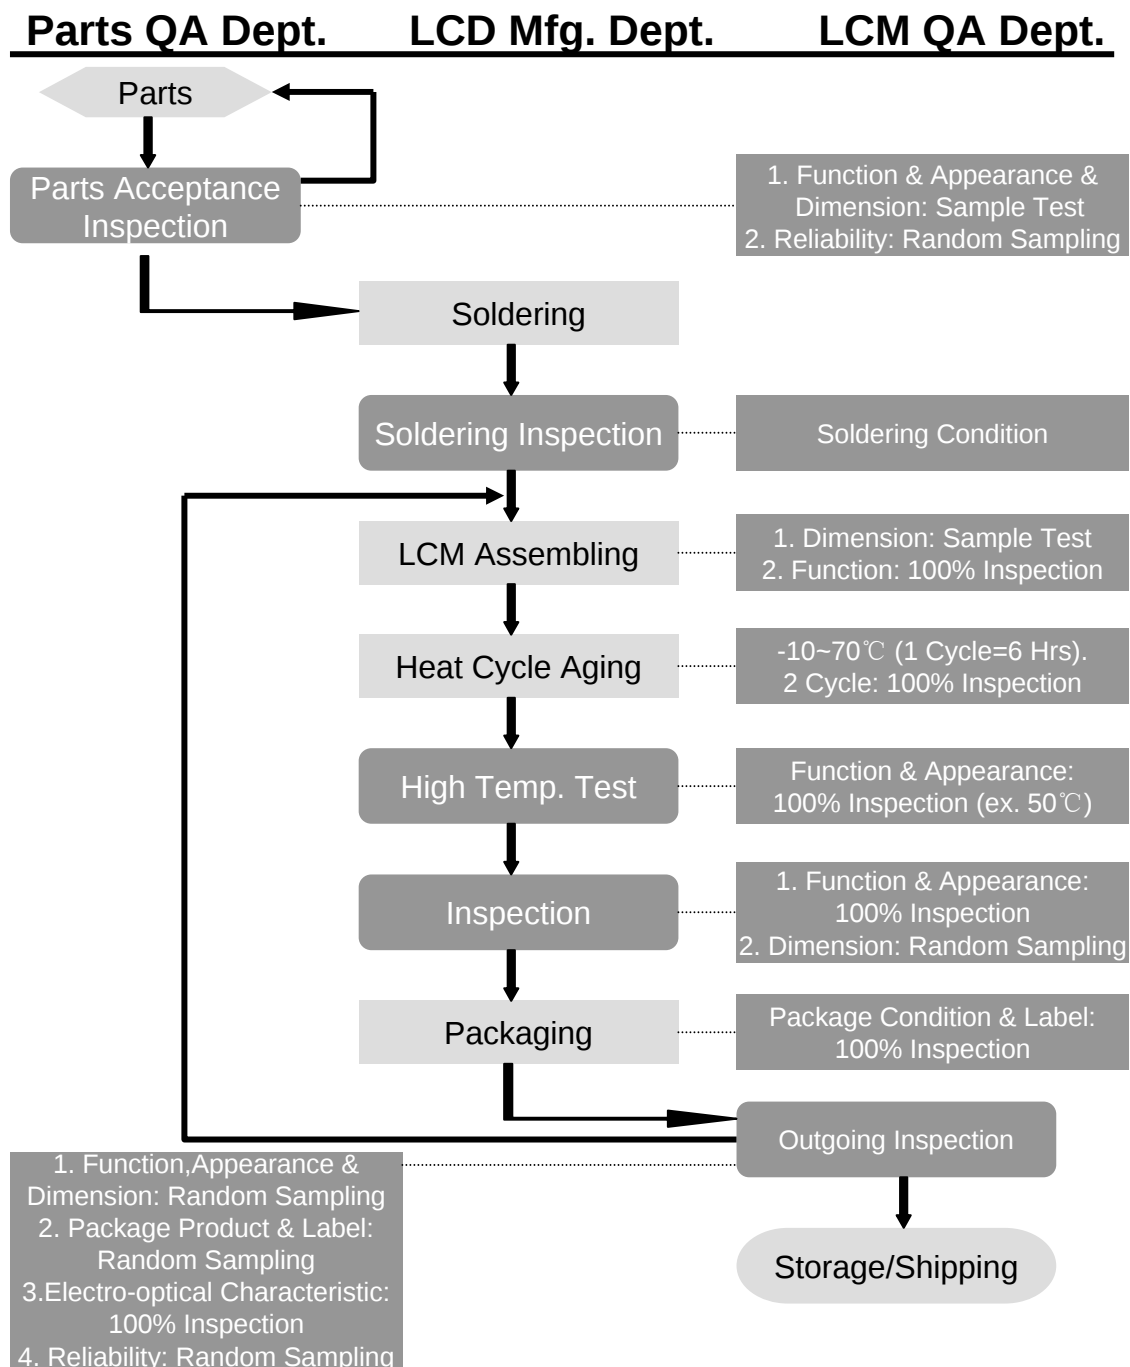



LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	8

7. RELIABILITY


•Operating life time:

Longer than 50000 hours (at room temperature without direct irradiation of sunlight)


•Reliability Characteristics:

Item	Test	Criterion
High temp	70°C / 200 Hrs	■Total current consumption should be below double of initial value ■Contrast ratio should be within initial value $\pm 50\%$ ■No defect in cosmetic and operational function is allowable
Low temp.	-20°C / 200 Hrs	
High humidity	40°C * 90%RH / 200 Hrs	
Thermal shock	-20°C $\rightarrow$ 25°C $\rightarrow$ 70°C $\rightarrow$ 25°C /5 Cycles (30min) (5min) (30min) (5min)	
Vibration	1. Operating time: Thirty minutes exposure in each direction (x, y, z) 2. Sweep Frequency (1min):10Hz $\rightarrow$ 55Hz $\rightarrow$ 10Hz 3. Amplitude: 0.75mm double amplitude	

8. BLOCK DIAGRAM

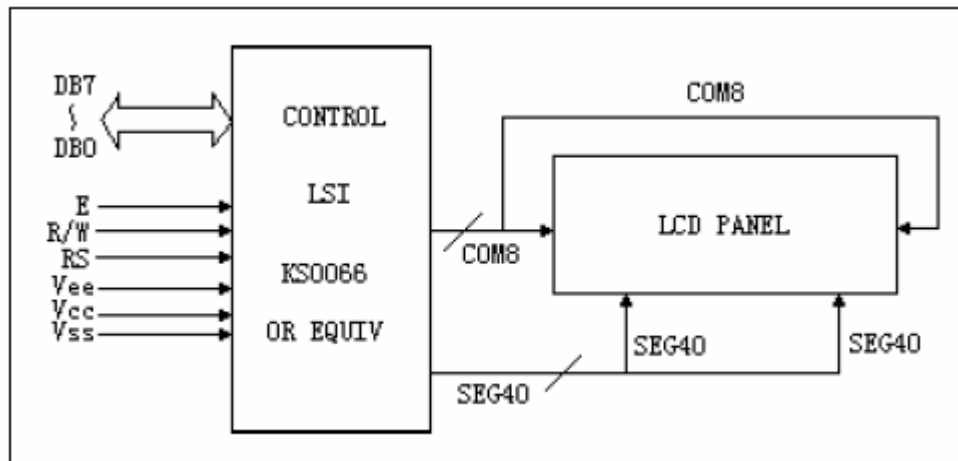


9. POWER SUPPLY

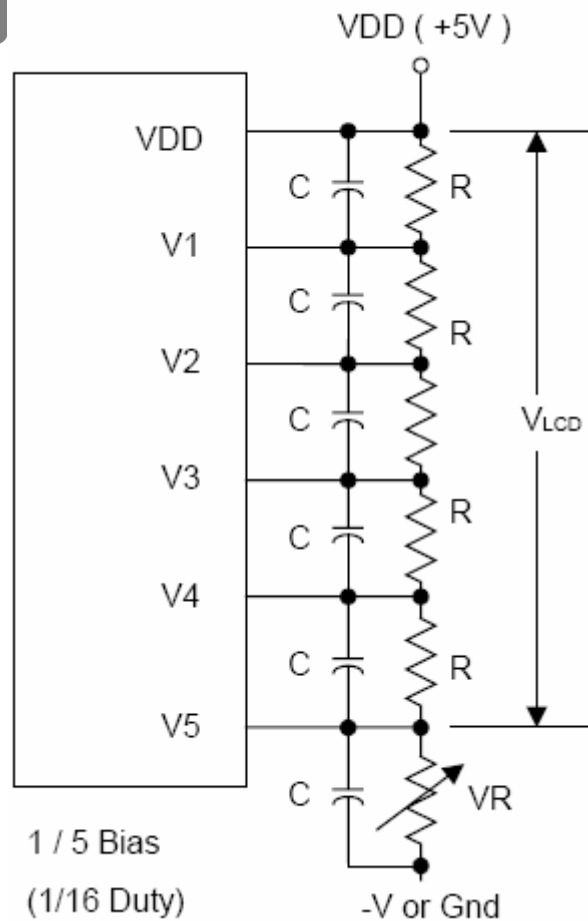


LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	10

10. TIMING DIAGRAM

• WRITE OPERATION

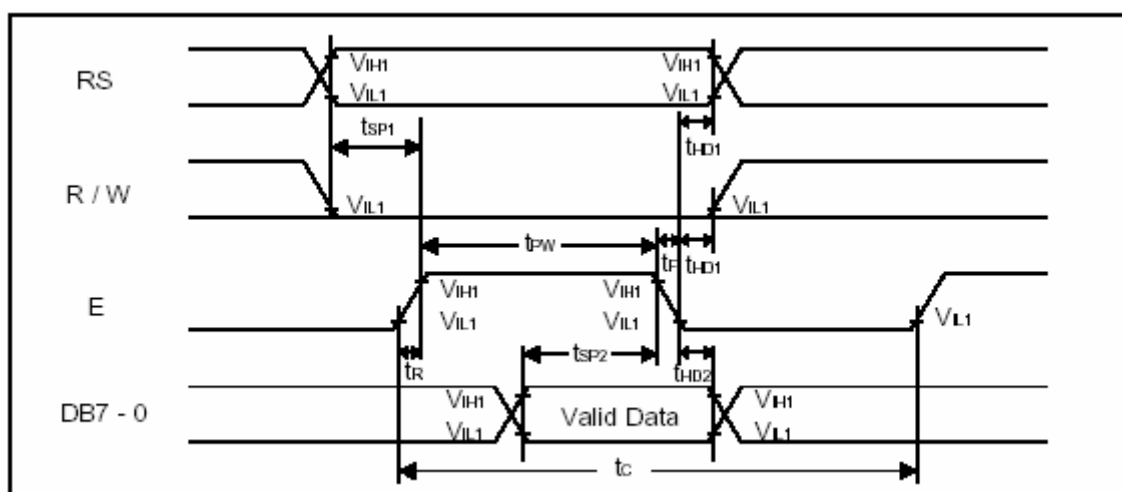

• READ OPERATION

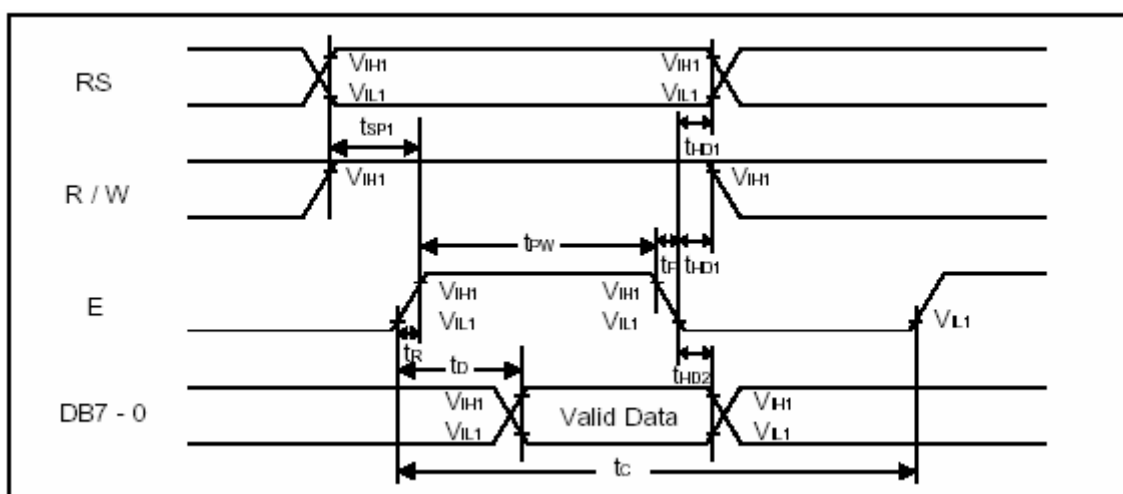

LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	11

11. AC CHARACTERISTICS

• WRITE MODE


Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
E Cycle Time	t _c	1000	-	-	ns	Pin E
E Pulse Width	t _{pw}	450	-	-	ns	Pin E
E Rise/Fall Time	t _r , t _f	-	-	25	ns	Pin E
Address Setup Time	t _{sp1}	60	-	-	ns	Pins: RS, R/W, E
Address Hold Time	t _{hd1}	20	-	-	ns	Pins: RS, R/W, E
Data Setup Time	t _{sp2}	195	-	-	ns	Pins: DB7 - 0
Data Hold Time	t _{hd2}	10	-	-	ns	Pins: DB7 - 0

• READ MODE

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
E Cycle Time	t _c	1000	-	-	ns	Pin E
E Pulse Width	t _w	450	-	-	ns	Pin E
E Rise/Fall Time	t _r , t _f	-	-	25	ns	Pin E
Address Setup Time	t _{sp1}	60	-	-	ns	Pins: RS, R/W, E
Address Hold Time	t _{hd1}	20	-	-	ns	Pins: RS, R/W, E
Data Output Delay Time	t _o	-	-	360	ns	Pins: DB7 - 0
Data hold time	t _{hd2}	5.0	-	-	ns	Pin DB7 - 0

12. INITIALIZATION SEQUENCE

[4-Bit Interface]

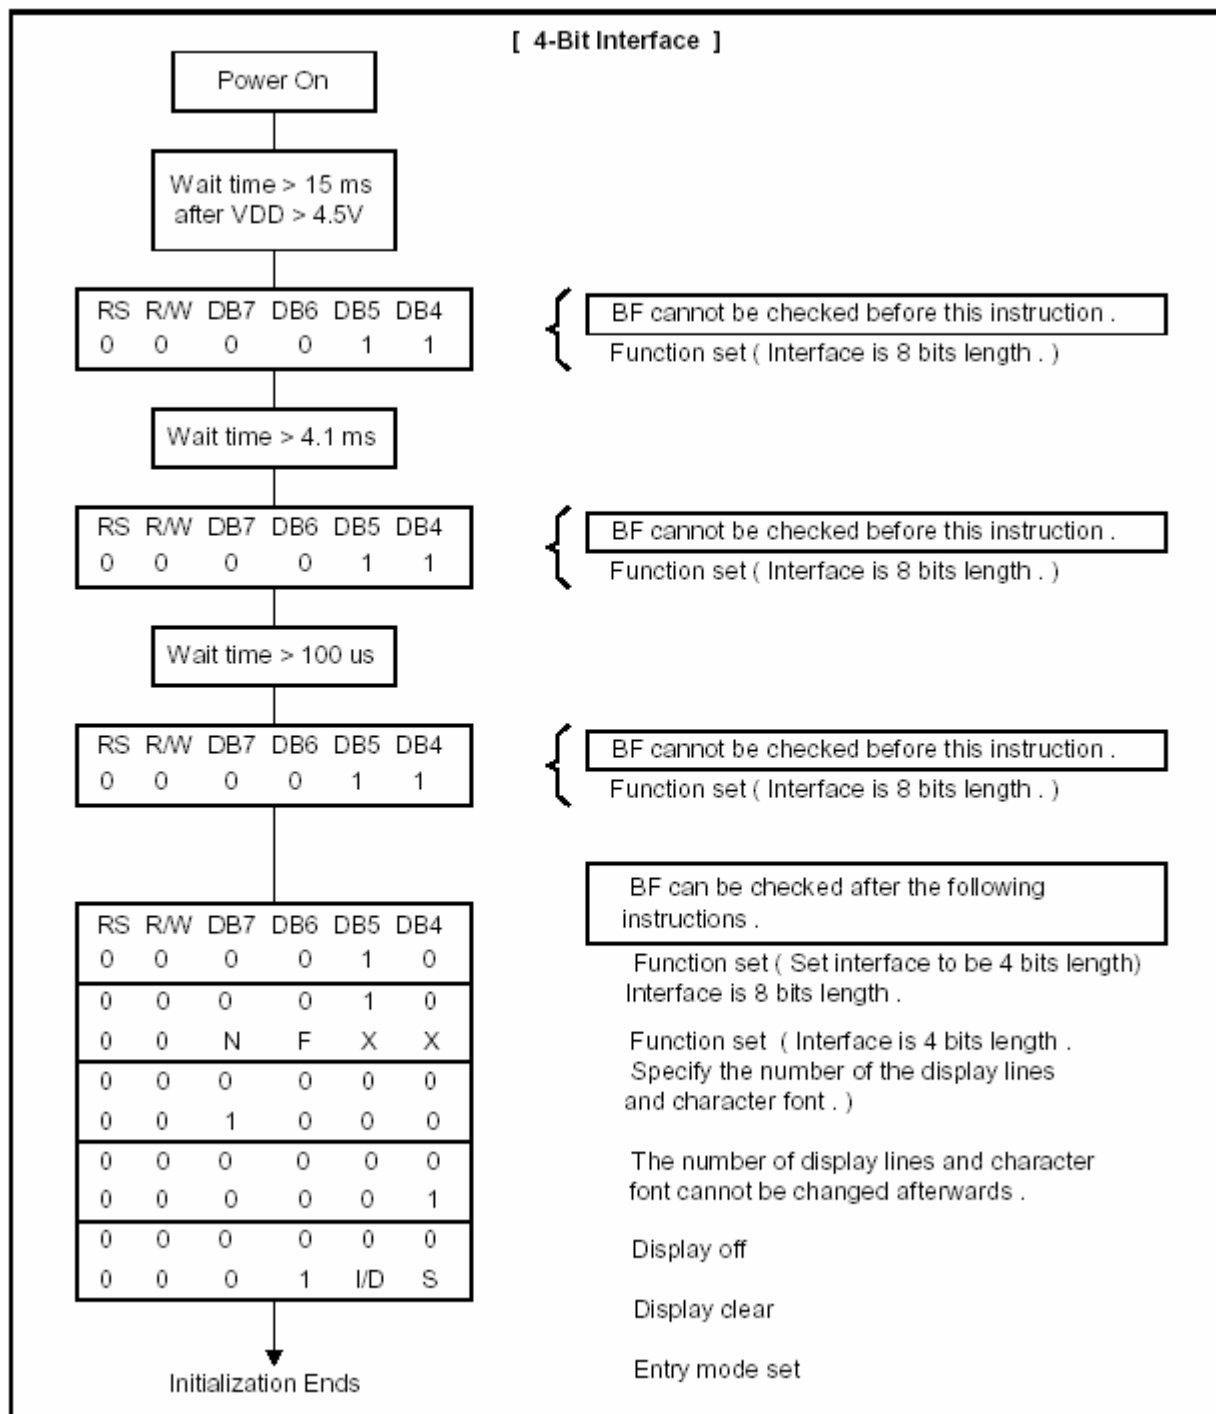

LCD MODULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	13

13. INSTRUCTION SET

COMMAND	COMMAND CODE										COMMAND CODE	E-CYCLE f _{osc} =250KHz
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
SCREEN CLEAR	0	0	0	0	0	0	0	0	0	1	Screen Clear, Set AC to 0 Cursor Reposition	1.64ms
CURSOR RETURN	0	0	0	0	0	0	0	0	1	*	DDRAM AD=0, Return, Content Changeless	1.64ms
INPUT SET	0	0	0	0	0	0	0	1	I/D	S	Set moving direction of cursor, Appoint if move	40us
DISPLAY SWITCH	0	0	0	0	0	0	1	D	C	B	Set display on/off,cursor on/off, blink on/off	40us
SHIFT	0	0	0	0	0	1	S/C	R/L	*	*	Remove cursor and whole display,DDRAM changeless	40us
FUNCTION SET	0	0	0	0	1	DL	N	F	*	*	Set DL,display line,font	40us
CGRAM AD SET	0	0	0	1	ACG						Set CGRAM AD, send receive data	40us
DDRAM AD SET	0	0	1	ADD						Set DDRAM AD, send receive data	40us	
BUSY/AD READ CT	0	1	BF	AC						Executing internal function, reading AD of CT	40us	
CGRAM/ DDRAM DATA WRITE	1	0	DATA WRITE						Write data from CGRAM or DDRAM	40us		
CGRAM/ DDRAM DATA READ	1	1	DATA READ						Read data from CGRAM or DDRAM	40us		
	I/D=1: Increment Mode; I/D=0: Decrement Mode S=1: Shift S/C=1: Display Shift; S/C=0: Cursor Shift R/L=1: Right Shift; R/L=0: Left Shift DL=1: 8D DL=0: 4D N=1: 2R N=0: 1R F=1: 5x10 Style; F=0: 5x7 Style BF=1: Execute Internal Function; BF=0: Command Received										DDRAM: Display data RAM CGRAM: Character Generator RAM ACG: CGRAM AD ADD: DDRAM AD & Cursor AD AC: Address counter for DDRAM & CGRAM	E-cycle changing with main frequency. Example: If fcp or f _{osc} =270KHz 40us x 250/270 =37us

14. FONT TABLE

b7- b3 b4 -b0		0000	0010	0011	0100	0101	0110	0111	1010	1011	1100	1101	1110	1111
0000	CG RAM (1)		0	a	P	`	P		—	タ	エ		α	p
0001	(2)	!	1	A	Q	a	q	a	ア	チ	△		ä	q
0010	(3)	"	2	B	R	b	r	「	イ	ウ	×		ß	θ
0011	(4)	#	3	C	S	c	s	」	ウ	テ	モ		ε	∞
0100	(5)	\$	4	D	T	d	t	、	エ	ト	ト		μ	Ω
0101	(6)	%	5	E	U	e	u	・	オ	ナ	1		ε	0
0110	(7)	&	6	F	V	f	v	ヲ	カ	ニ	ヨ		ρ	Σ
0111	CG RAM (8)	'	7	G	W	g	w	ア	キ	ヌ	ラ		g	π
1000	CG RAM (1)	<	8	H	X	h	x	イ	ウ	ホ	リ		γ	×
1001	(2)	>	9	I	Y	i	y	ウ	ケ	ル	ル		ı	y
1010	(3)	*	:	J	Z	j	z	エ	コ	ン	レ		j	〒
1011	(4)	+	:	K	[	k	<	オ	サ	ヒ	ロ		*	π
1100	(5)	,	<	L	¥	l	l	ホ	シ	フ	ワ		φ	π
1101	(6)	—	=	M	I	m	>	ユ	ズ	へ	ン		±	÷
1110	(7)	.	>	N	^	n	→	ヨ	セ	ホ	・		ñ	
1111	CG RAM (8)	/	?	O	_	o	←	ッ	リ	マ	°		ö	■

LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	15

15. Handling Precautions

1. Limitation of Application:

Optrex products are designed for use in ordinary electronic devices such as business machines, telecommunications equipment, measurement devices and etc. Please handle the products with care. (see below)


Optrex products are not designed, intended, or authorized for use in any application which the failure of the product could result in a situation where personal injury or death may occur. these applications include, but are not limited to. life-sustaining equipment, nuclear control devices, aerospace equipment, devices related to hazardous or flammable materials, etc. [If Buyer intends to purchase or use the Optrex Products for such unintended or unauthorized applications, Buyer must secure prior written consent to such use by a responsible officer of Optrex Corporation.] Should Buyer purchase or use Optrex Products for any such unintended or unauthorized application [without such consent]. Buyer shall indemnify and hold Optrex and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, costs, damages and expenses, and reasonable attorney's fees, arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Optrex was negligent regarding the design or manufacture of the part.

2. Industrial Rights and Patents

Optrex shall not be responsible for any infringement of industrial property rights of third parties in any country arising out of the application or use of Optrex products, except which directly concern the structure or production of such products.


No Press and Shock!

If pressure to LCD, orientation may be disturbed.
LCD will broken by shock!

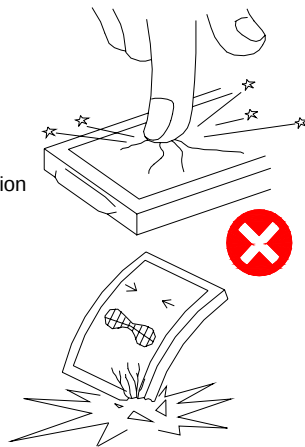


Don't Swallow or Touch Liquid Crystal!

Liquid Crystal may be leaked when display is broke.
If it accidentally gets your hands, wash then with water!

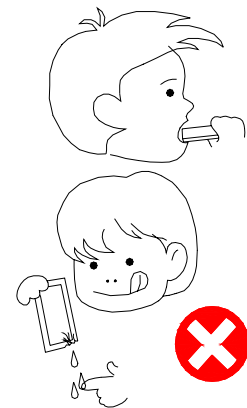


Don't not Scratch!

Polarizer is a soft material and can easily be scratched.




No DC Voltage to LCD!

DC volrage or driveing higher than the specified voltage will reduce the lifetime of the LCD.




LCD MODULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	16


Don't Press the Metallic Frame and Disassemble the LCM

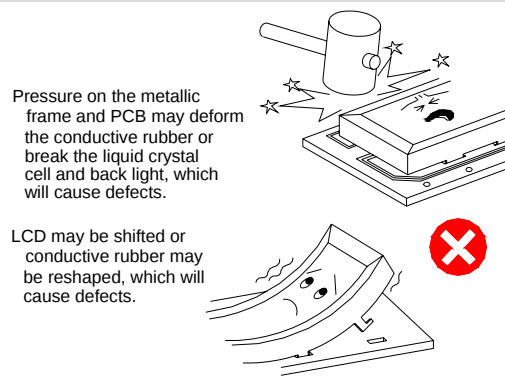


Slowly Peel Off Protective Film!

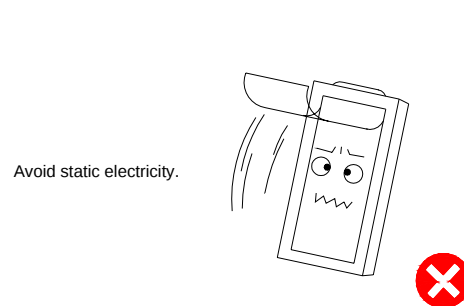


Avoid Static Electricity!

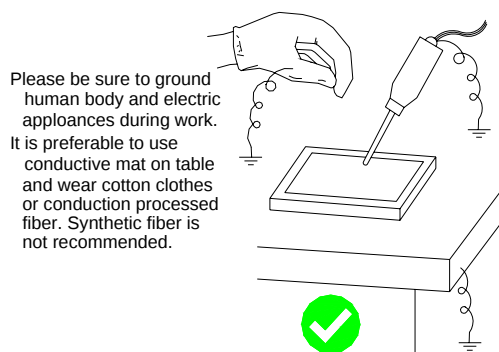


Wear Gloves While Handling!

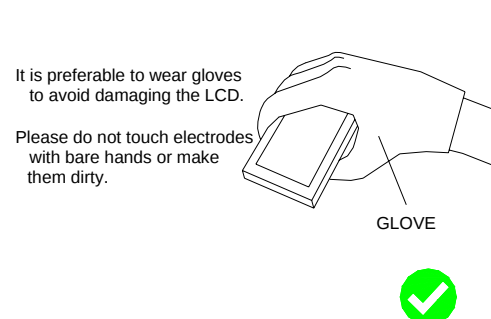

Keep Away From Extreme Heat and Humidity!

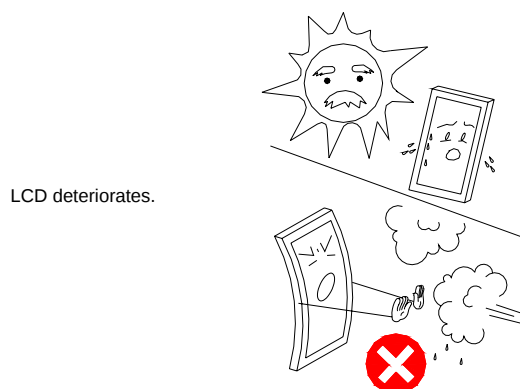


Use Alcohol to Clean Terminals!

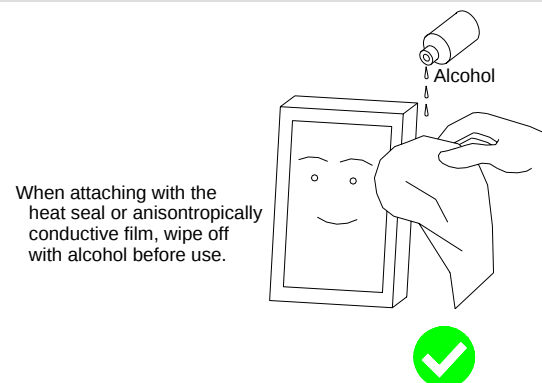

LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	17

Don't Drop Water on LCD!

Note that the presence of waterdrops or dew in the LCD panel may deteriorate the polarizer or corrade electrode.

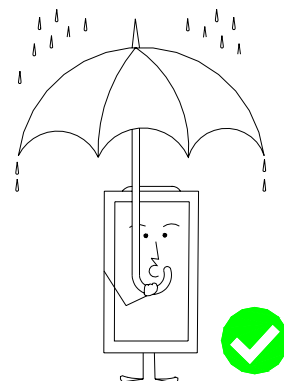

Precaution in Soldering LCD Module

Basic instructions: Solder I/O terminals only.

Use soldering iron without leakage.

(1)Soldering condition to I/O terminals

Temperature at tip of the iron: $280 \pm 10^{\circ}\text{C}$

Soldering time: 3~4 sec.

Type of solder: Eutectic solder (containing colophony-flux)

*Please do not use flux because it may soak into LCD Module or contaminate it.

*It is preferable to peel off protective film on display surface after soldering I/O terminals is finished.

(2)Remove connector or cable

*When you remove connector or cable soldered to I/O terminals, please confirm that solder is fully melted. If you remove by force, electrodes at I/O terminals may be damaged(or stripped off).

*It is recommended to use solder suction machine.

Long-term Storage

If it is necessary to store LCD modules for a long time, please comply with the following procedures.

If storage condition is not satisfactory, display(especially polarizer) may be deteriorated or soldering I/O terminals may become difficult(some oxide is generated at I/O terminals plating).

1.Store as delivered by Optrex


2.If you store as unpacked,put in anti-static bag,seal its opening and store where it is not subjected to direct sunshine nor fluorescent lamp.

3.Store at temperature 0 to $+35^{\circ}\text{C}$ and at low humidity.Please refer to our specification sheets for storage temperature range and humidity condition.

Long-term Storage

Please use power supply with built-in surge protection circuit.

16. EXTERNAL DIMENSION

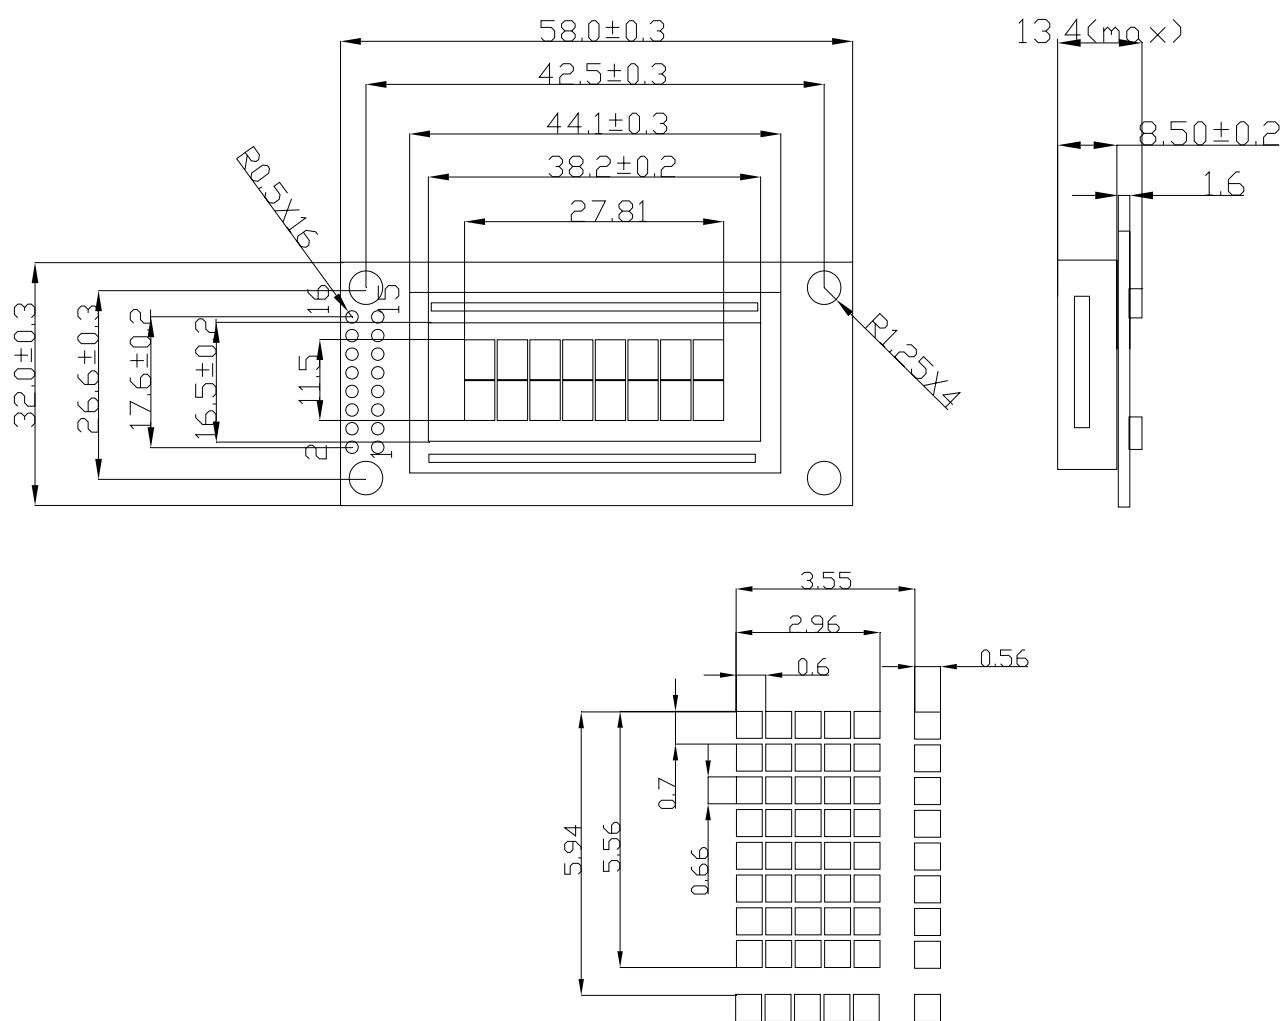

1	2	3	4	5	6	7	8
VSS	VCC	VEE	RS	R/W	E	DB0	DB1
9	10	11	12	13	14	15	16
DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

LCD MOUDULE SPECIFICATION FOR APPROVAL	DATE	02/12/05
	VER.	1.0
JHD802C	PAGE	19

17. INTERFACE

PIN NO.	SYMBOL	DESCRIPTION	FUNCTION
1	VSS	GROUND	0V (GND)
2	VCC	POWER SUPPLY FOR LOGIC CIRCUIT	+5V
3	VEE	LCD CONTRAST ADJUSTMENT	
4	RS	INSTRUCTION/DATA REGISTER SELECTION	RS = 0 : INSTRUCTION REGISTER RS = 1 : DATA REGISTER
5	R/W	READ/WRITE SELECTION	R/W = 0 : REGISTER WRITE R/W = 1 : REGISTER READ
6	E	ENABLE SIGNAL	
7	DB0	DATA INPUT/OUTPUT LINES	8 BIT: DB0-DB7
8	DB1		
9	DB2		
10	DB3		
11	DB4		
12	DB5		
13	DB6		
14	DB7		
15	LED+	SUPPLY VOLTAGE FOR LED+	+5V
16	LED-	SUPPLY VOLTAGE FOR LED-	0V