
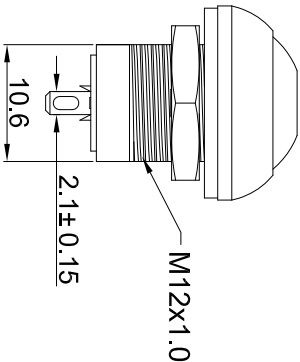
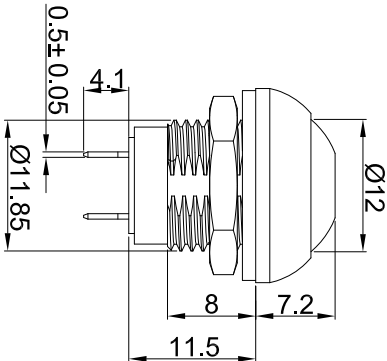



PB12






SPECIFICATIONS

Circuit	:SPST
Current rating	:0.2A
Voltage rating	:250VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50mΩ Max
Insulation resistance	:100MΩ Min
Travel	:2.0mm± 0.5mm
Operating Force	:500± 150gf
Mechanical Life	:Over 200,000 cycles
Electrical Life	:Over 30,000 cycles
Manual Welding	:350° C for 3 seconds
Function	:Momentary
Operating temperature	: -20° C ~ +85° C
Level of protection	:IP67

MATERIAL:

Base: PA, UL rated: 94 V-2 Min;
Cap: PA, UL rated: 94 V-2 Min;
Terminal: Copper, Silver plated ;
Nut: Brass, NI Plated .



Note:
This product is strictly prohibited wave soldering and reflow soldering, please use the manual welding processing, temperature of 350° ±5° and time is 3± 0.5 seconds;

A4	规格参数更新	2023.02.21	N/A	公差 TOLERANCES	±30(±0.5)	5~30(±0.3)	≤5(±0.2)	角度 ANGLE ±5°	单位	DIMENSION UNIT	mm.
A3	图面整理更新	2020.07.01	N/A	视角 VIEWING ANGLE		比例尺 SCALE	NONE	日期 DATE	品名 TITLE	图号 DRAWING NO	
A2	产品尺寸整理更新	2016.12.05	N/A	核准 APPROVED BY	Richard	核对 CHECKED BY	Sinc	绘图 DRAWN BY	ShaoFei Ma		
A0	New Issue	2012.02.10	N/A						PB12-M-1B-N-N	PB12-M-1B-N-N_CP_A4	
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.								