

4


3

2


1

REVISION DATA				
REV	ECN	DESCRIPTION	DATE	APPROVED
A			2022.6.21	Mary


D

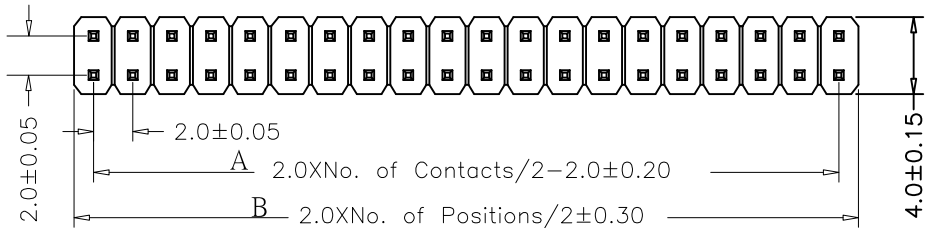

C

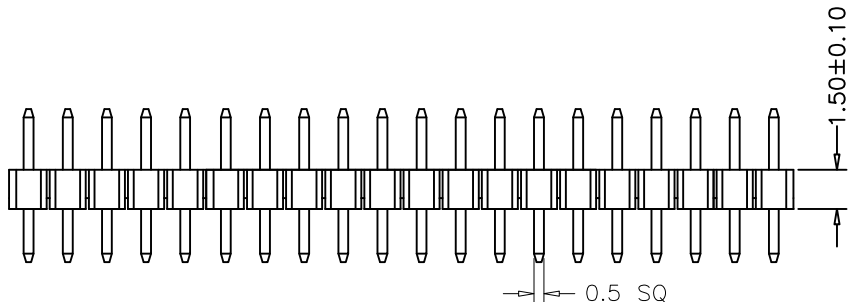


B

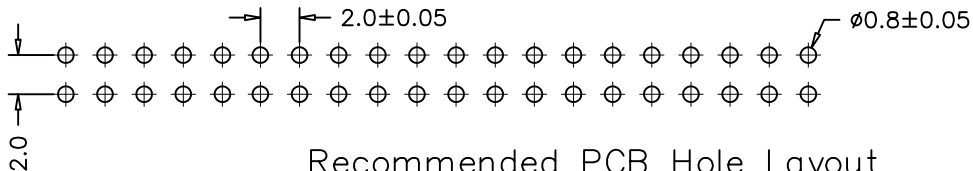

Recommended PCB Hole Layout

A



Technical Data

Material:
Contact Material: Brass
Contact plating: Au Over 50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PA9T+30%G.F

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Voltage Rating: 550V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C

Contacts	A	B
32Way(2*16)	30.0mm	32.0mm

D

C

B

A



深圳市新瑞科技有限公司
SHENZHEN SINRUI TECHNOLOGY CO.,LTD

TOLERANCE:	PROJECTON		TITLE:
ANGLE ±5°	DATE	22.7.6	2.0*2.0mm Pin Header Dual Row Straight Angle W=4.0mm
X.XXX ±0.05	DRAWN	Mary	PART NO: SR.M15D32AS.01
X.XX ±0.2	CHECKED	Jon	DRAWING NO:
X.X ±0.30	APPROVED		REV: G
X. ±0.50			UNIT: mm
			SCALE: 2:1
			SIZE: A4

4

3

2

1