
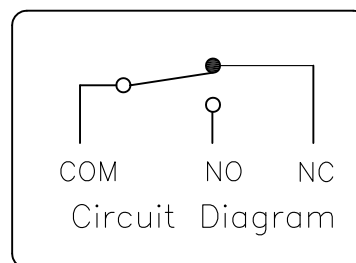
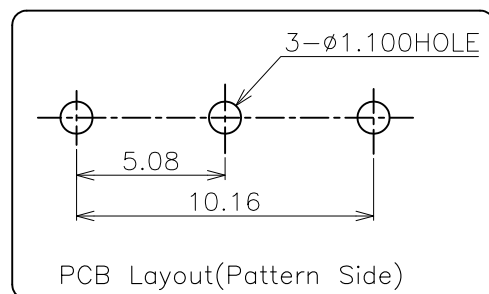
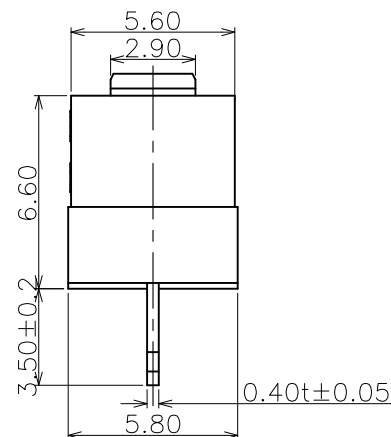
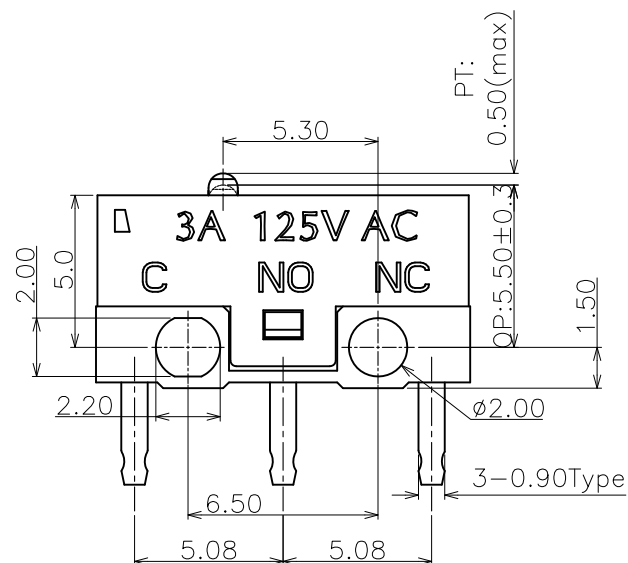
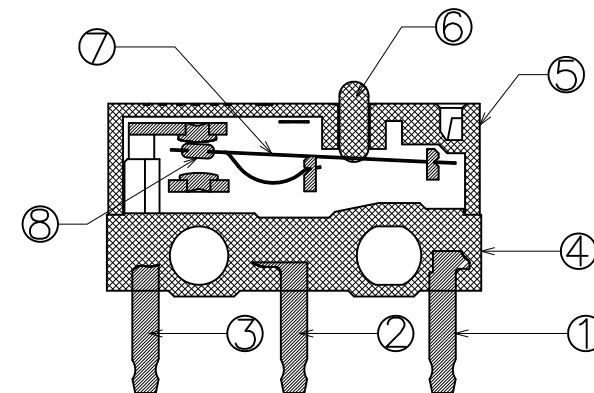
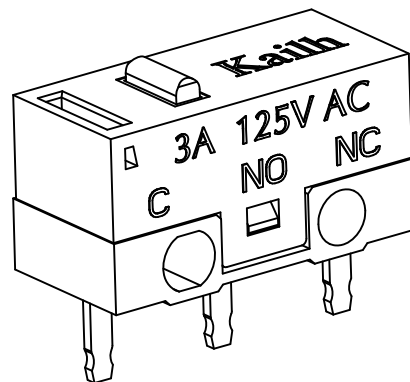


ABIDE BY ROHS

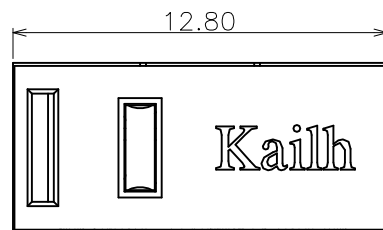

■ Specification :

- 1. Rating : 3A 125VAC
- 2. Contact Resistance : 50mΩ Max
- 3. Insulation Resistance : 100MΩ Min (DC250V)
- 4. Withstand Voltage : AC500V (50-60Hz) for 1 minute
- 5. Operation Force : 150gf Max
- 6. Releasing Force : 20gf (Min)
- 7. Operating Position : 5.50 ± 0.3mm
- 8. Electric Life : 30,000 Cycles (min)
- 9. Over travel : 0.20mm (min)

⑧	Contact	—	1	Silver Alloy	—	—
⑦	Shrapnel	—	1	Copper Alloy	—	—
⑥	Keystoke	—	1	PBT	Black	UL94V-0
⑤	Cover	—	1	PBT	Black	UL94V-0
④	Base	—	1	PBT	Black	UL94V-0
③	Nc Terminal	3	1	BRASS	Plating Silver	—
②	No Terminal	2	1	BRASS	Plating Silver	—
①	Com Terminal	1	1	BRASS	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
DRAWN		Wanwenxue	Jun.23.2011				
CHECKED					TITLE: MI1266 Micro Switch		
APPROVALS					Customer No.		
					PART NO. MI126703D110		
TOLERANCES ARE		30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10<L≤30	±0.20				
		5<L≤10	±0.15				
		L≤5	±0.10				
		±2°		DRAWING NO.	SHEET 1 OF		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			