


Customer Approve By

REV	DESCRIPTION	MODIFY BY	DATE
A0	1 st DESIGN	LZZ	2022-01-12
A1	改FPC结构	LZZ	2022-01-19
A2	FPC桥接端缩短1.8mm	LZZ	2022-02-22

接口定义

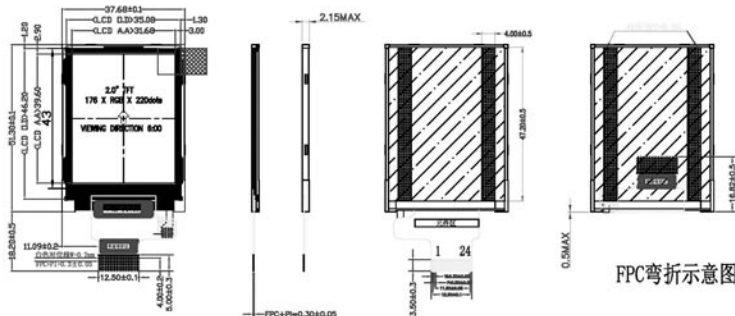


FPC弯折示意图

FPC展开出货

1	VDD
2	GND
3	LEDA
4	RESET
5	CS
6	RS
7	WR
8	RD
9	DB0(NC)
10	DB1(NC)
11	DB2(NC)
12	DB3(NC)
13	DB4(NC)
14	DB5(NC)
15	DB6(NC)
16	DB7(NC)
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15

Note: RoHS

- | | |
|---|-------------|
| 1. Display Module: | 2.0" TFT/TN |
| 2. Driving Condition: | VDD=2.8V |
| 3. Viewing Direction: | 6H |
| 4. Operating Temp: | -20°~+70° C |
| Storage Temp: | -30°~+80° C |
| 5. LCD: | / |
| 6. IC: | ST7775S |
| 7. Backlight: | WHITE LED*3 |
| 8. Unspecified tolerance is $\pm 0.20\text{mm}$ | |
| 9. ROHS Request | |



Module NO.			 深圳金视界光电科技有限公司 SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED			SHEET 1	
GVH0200QC18S					OF 1		
			DESIGNED	CHECKED	APPROVED	FILE NAME	
	UNIT	SIZE				Count Dwg.	
	mm	A4 N-T-S					