


A
B
C
D
E
F




RevNo	Revision note	Date	Signature	Checked
1				
2				
3				

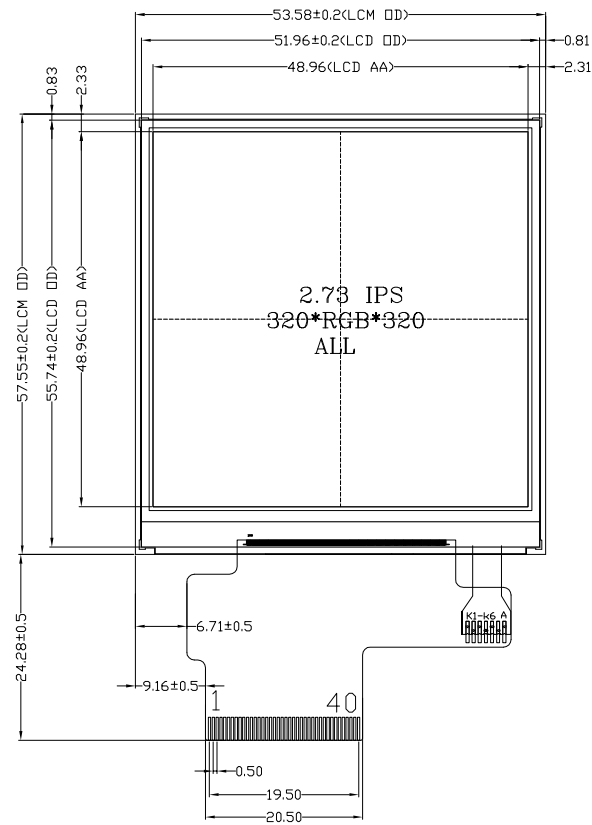

Features:

- 1.LCD Type:2.8 "IPS TFT.
- 2.Resolution: 320*320
- 3.Display Colr: 262K
- 4.Driver IC: ILI9488
- 5.Viewing Angle: ALL.
- 6.Interface Types:MCU16-bit/SPI .
- 7.Backlight Tyoes: 6 LEDs.
- Voltage: 6V Electricity: 120mA.
- 8.Operating temperature: -20 C° ~70 C° .
- 9.Storage Temperature: -30 C° ~80 C° .
- 10.Storage Humidity:10RH ~ 40RH .

IM0=0, MCU16-bit, DB0~DB15;
IM0=1, 4Line spi

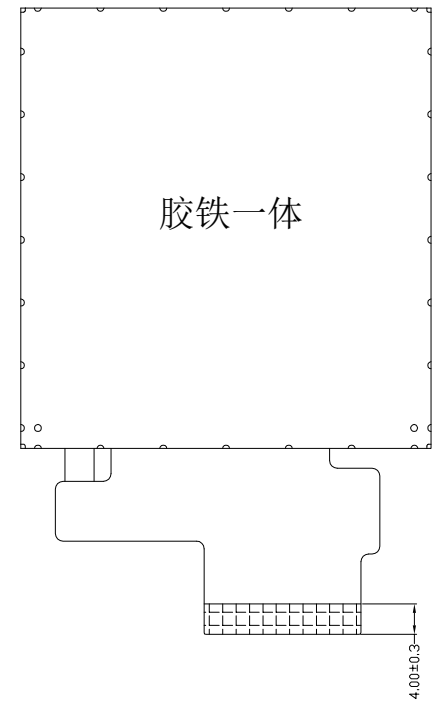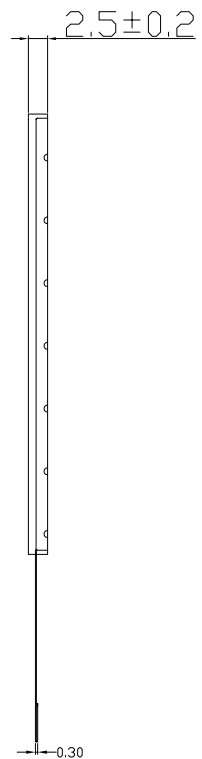

PIN	DESCRIPTION
1	GND
2	GND/(SDA)
3	IM0
4	FMARK
5	CTP-INT
6	CTP-SCL
7	RESET
8	RS/(D/C)
9	CS
10	RD
11	WR/(SCL)
12	VCC
13	NC/(SDD)
14	GND
15	DB15/(GND)
16	DB14/(GND)
17	DB13/(GND)
18	DB12/(GND)
19	DB11/(GND)
20	DB10/(GND)
21	DB9/(GND)
22	DB8/(GND)
23	DB7/(GND)
24	DB6/(GND)
25	DB0/(GND)
26	DB1/(GND)
27	DB2/(GND)
28	DB3/(GND)
29	DB4/(GND)
30	DB5/(GND)
31	CTP-RST
32	CTP-SDA
33	LEDA
34	LEDK1
35	LEDK2
36	LEDK3
37	LEDK4
38	LEDK5
39	LEDK6
40	GND

Limits Unless Otherwise Noted				签名	日期	材料	Shenzhen Haresan Electroncs Co.,Ltd			
Tolerance Grade				设计			website: www.hesoled.com			
Grade	⊙			绘图		单位	mm			
0 - 150	±0.10	±0.15	±0.20	审核		比例	1:1	客户图号		
150+	±0.20	±0.25	±0.30	批准		日期	20201026	工程图号	THEM0273-001	
Angle	±0.50°	±0.80°		客户确认		投影法	⊕	版本	1.0	