
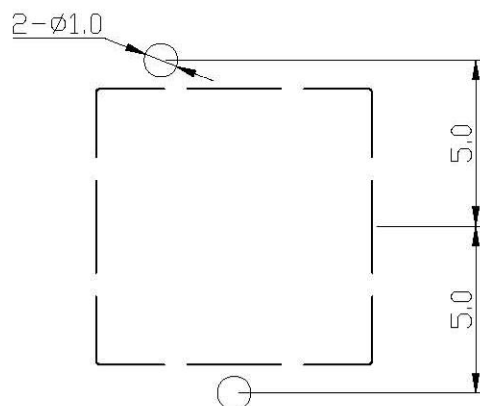
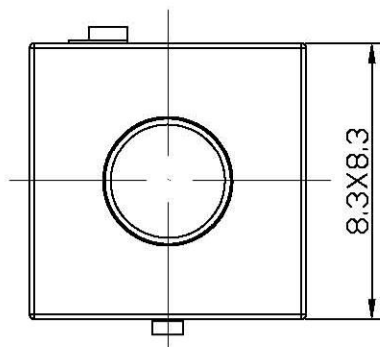

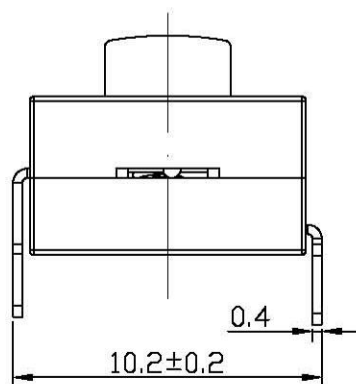


CAD FILE:

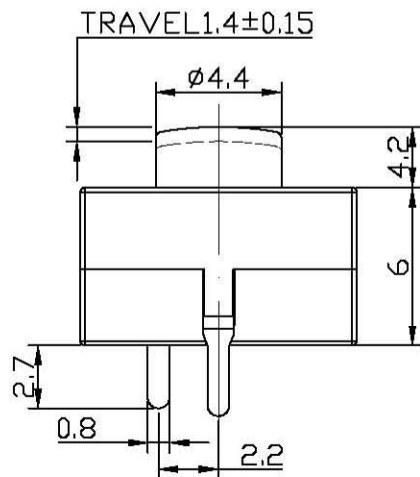

KEY SPECIFICATION:

1. RATING : DC 50V 0.5A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: 500VAC (50HZ) FOR 1Min
5. OPERATING FORCE: 500gf±50gf
6. OPERATING LIFE: 10,000CYCLES
7. OPERATING TEMPERATURE: -20°C~+70°C

8					TOLERANCE UNLESS SPECIFIED				
7	SPRING	SPCC	1	Ag PLATED					
6	CONTACT	BRASS	1	Ag PLATED	WITHIN 1.5: ±0.1mm				
5	TERMINAL	BRASS	3	Ag PLATED	OVER 1.5: ±0.2mm	ISSUE	DATE	DESCRIPTIONS	APPD.
4	DOWN BUTTON	PA66	1	BLACK		TITLE: PUSH BUTTON SWITCH		UNIT:mm	DRWG. NO.:
3	UP BUTTON	PA66	1	BLACK		MODEL NO: JBL8G-1201 H=10.2mm		SCALE: 4:1	DWN
2	COVER	PA66	1	BLACK				CHK'D	
1	BASE	PA66	1	BLACK				APPD.	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	XIAMEN JINBEILI ELECTRONICS CO.,LTD				