

JD 7510

ON (MOMENTARY)-OFF-ON

ON (MOMENTARY)-ON-ON KEY SWITCH

ON-OFF (MOMENTARY)

Description:

Zinc alloy nickel-plated housing and
4-disc tumbler cylinder.


Two single-bitted brass keys.

Nut or clip (please specify)

4 AMPS 125V AC or 28V DC, 2AMPS 250V AC



LOCK CONFIGURATION AS VIEWED FROM KEY END	MODEL NO. POLES	CONNECTED TERMINALS					KEY PULL POSSIBLE THESE POS.
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	
45 INDEXING MOMENTARY	7510-A SP	8-1	1-2				POS. 1
	7510-B DP	8-1 1-2	1-2 5-6				
45 INDEXING MOMENTARY	7510-C SP	8-1	7-8				POS. 1
	7510-D DP	8-1 4-5	7-8 3-4				
45 INDEXING MOMENTARY	7510-E SP	8-1	1-2	7-8			POS. 1
	7510-F DP	8-1 4-5	1-2 5-6	7-8 3-4			
45/90 INDEXING MOMENTARY	7510-G SP	7-1	1-2	6-7			POS. 1 POS. 3
45/90 INDEXING MOMENTARY	7510-H SP	8-1	7-8	2-3			POS. 1 POS. 3
45 INDEXING MOMENTARY	7510-I SP	8-1	1-2	7-8			POS. 1
	7510-J DP	8-1 4-5	1-2 5-6	7-8 3-4			
45 INDEXING MOMENTARY	7510-K SP	8-1	7-8	1-2			POS. 1
	7510-L DP	8-1 4-5	7-8 3-4	1-2 5-6			

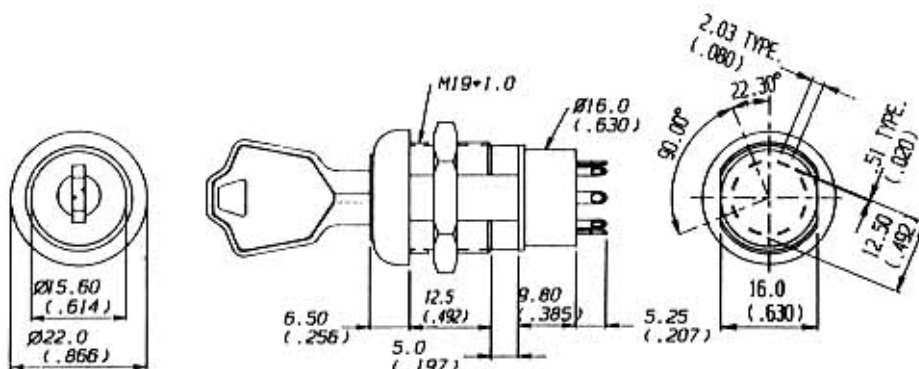

JACK DART ENTERPRISE CO., LTD

3F, No. 7, Alley 9, Lane 23, Nanking E. Rd., Sec. 5, Taipei, Taiwan

Tel:886-2-2765-1028

Fax:886-2-2756-6259