

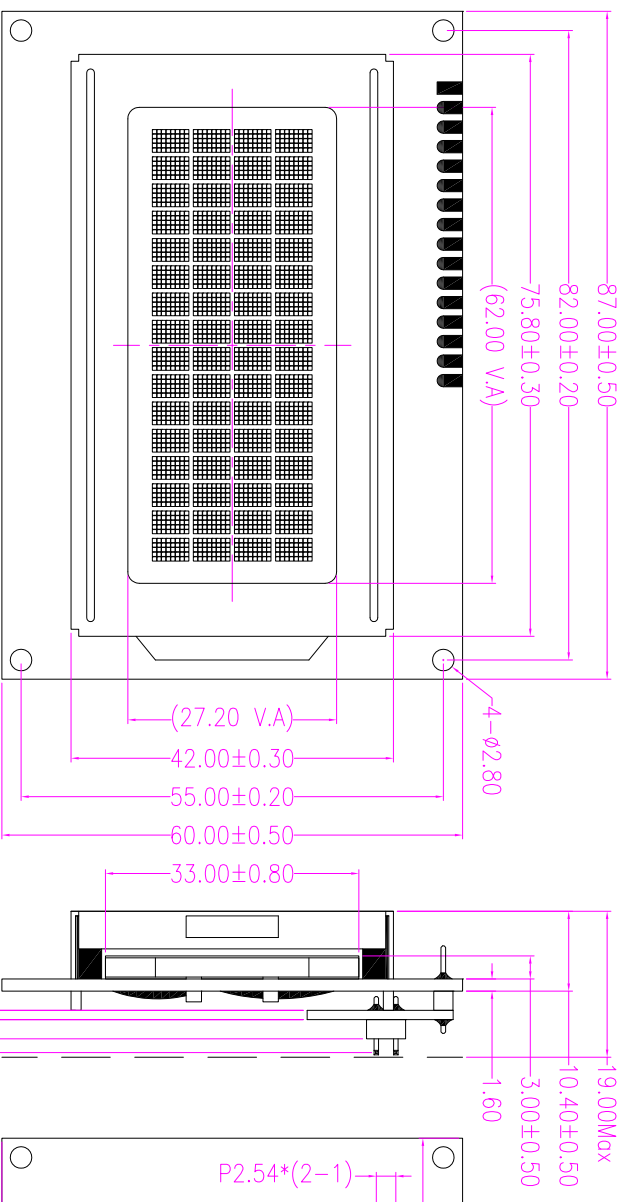


CN1:CM Interface		CN2:Backlight Interface	
Pin NO.	Pin Name	Pin NO.	Pin Name
1	VSS	1	LED(+)
2	VCC	2	VCC
3	SDA	Backlight ON:Connect CN2-1,CN2-2	
4	SCL	Backlight OFF:Disconnect CN2-1,CN2-2	
	Interface IIC		

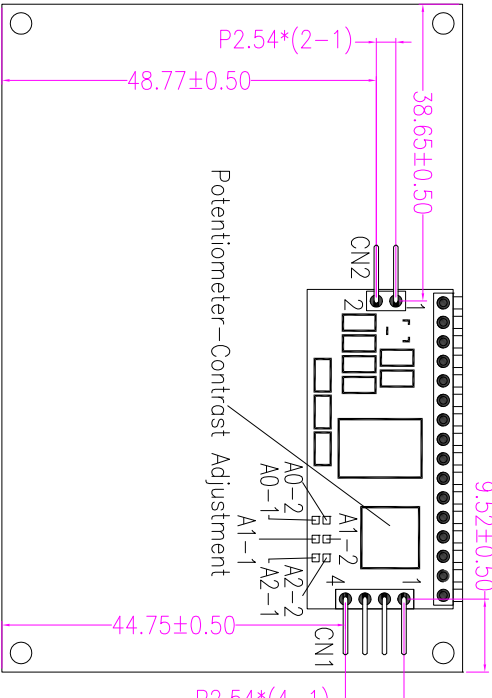

INPUTS			IIC BUS SLAVE ADDRESS
A2-1,A2-2	A1-1,A1-2	A0-1,A0-2	
Connect	Connect	Connect	0x20
Connect	Connect	Disconnect	0x21
Connect	Disconnect	Connect	0x22
Connect	Disconnect	Connect	0x23
Connect	Disconnect	Connect	0x24
Disconnect	Connect	Disconnect	0x25
Disconnect	Connect	Connect	0x26
Disconnect	Disconnect	Disconnect	0x27

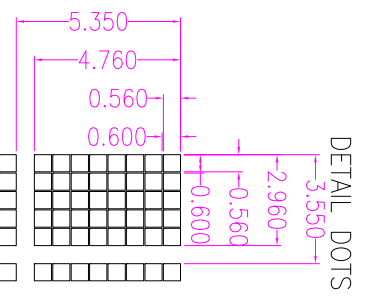

**SPECIFICATIONS:**

- 1.DISPLAY TYPE:YELLOW-GREEN/STN
- 2.VIEWING DIRECTION:6:00 O'CLOCK
- 3.POLARIZER MODE:TRANSELECTIVE/POSITIVE
- 4.DRIVE METHOD:1/16 DUTY,1/5 BIAS
- 5.OPERATING TEMP:-20°C---+70°C
- 6.STORAGE TEMP:-30°C---+80°C
- 7.WORKING VOLTAGE:VDD-VSS=+5.0VDC
- 8.BACKLIGHT:YELLOW-GREEN
- 9.ALL UNMARKED TOLERANCES:±0.20mm/±0.5°



**深圳市佳显电子技术有限公司**  
Shenzhen Goodview Electronic Technology Co.,Ltd



绘图: 李建清  
Drawn By: 李建清  
审核: [Blank]  
Checked by: [Blank]  
客户编号: CM-SJXD1604A-ZDYSYMN  
Customer No.: [Blank]

单位: mm  
日期: 2024-08-06  
Date: [Blank]

批准: [Blank]  
Approved by: [Blank]  
图纸版号: V1  
Drawing Version: V1  
页数: 1/1  
Sheet No.: 1/1

版本 Ver.	标记 Mark	更改 Modify	内容 the content	日期 Date	更改人 Modified by
			First issue	20240806	李建清

版本 Ver.	标记 Mark	更改 Modify	内容 the content	日期 Date	更改人 Modified by
	V1				